

Receptacle for SKS-215 E

KS-215 S

Item KS-215S





GO TO PRODUCT

ingun[®]

Partner for Future Technology

INGUN SELECTION

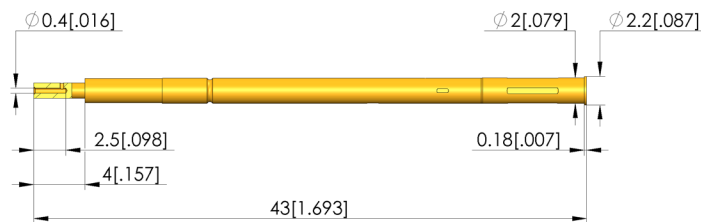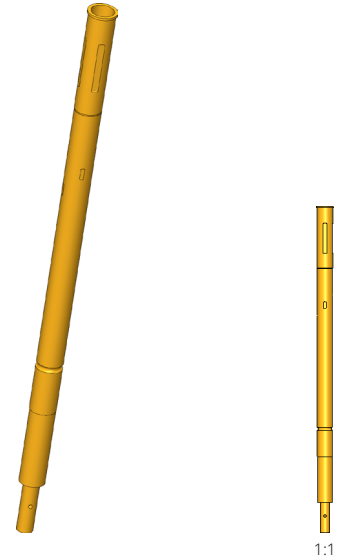

General data

| | |
|--------------------------------|--|
| Product group: | Receptacles (KS) |
| Series: | KS-215 |
| Sub-series: | KS-215 S press-in version Schnellwechselsystem |
| Type of receptacle connection: | Plug / open |
| Press ring: | No |
| Surface area: | Gold |
| Collar diameter: | 2.2 mm [.086 in] |
| Collar height: | 0.2 mm [.007 in] |
| Knurl: | No |
| Vacuum-tight: | No |
| RoHS-compliant: | RoHS-3 |

Mounting hole

| | |
|------------------------|---------------------------------|
| Mounting hole in CEM1: | 1.98 - 2.00 mm [.077 - .078 in] |
| Mounting hole in FR4: | 1.99 - 2.01 mm [.078 - .079 in] |

Mechanical data

| | |
|-----------------|-----------------|
| Total length: | 43 mm [1.69 in] |
| Outer diameter: | 2 mm [.078 in] |

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 04/24_GB

Learn more about
Test probes



RECEPTACLES

ingun.com