

Home - Fischerelektronik - LA HPK 3

fischerelektronik.de/web_fischer/en_GB/VA/LAHPK3300230/datasheet.xhtml




Cooling aggregates > Cooling aggregates with axial fan

- high performance cooling aggregates of special design
- optimal pressed in single lamellae
- low pressure losses due to adjusted fin geometry
- smallest fin spacings give a big heat exchange area
- maximum heatsink length 300 mm
- special designs according to drawing

Features

width:	282 mm
height:	110 mm
length:	300 mm
thermal resistance:	0.164 - 0.078 K/W
surface:	raw degreased aluminium (by the metre raw aluminium)
operating voltage of the fan motor:	<ul style="list-style-type: none">• 24 V DC• 230 V AC

Technical Drawing

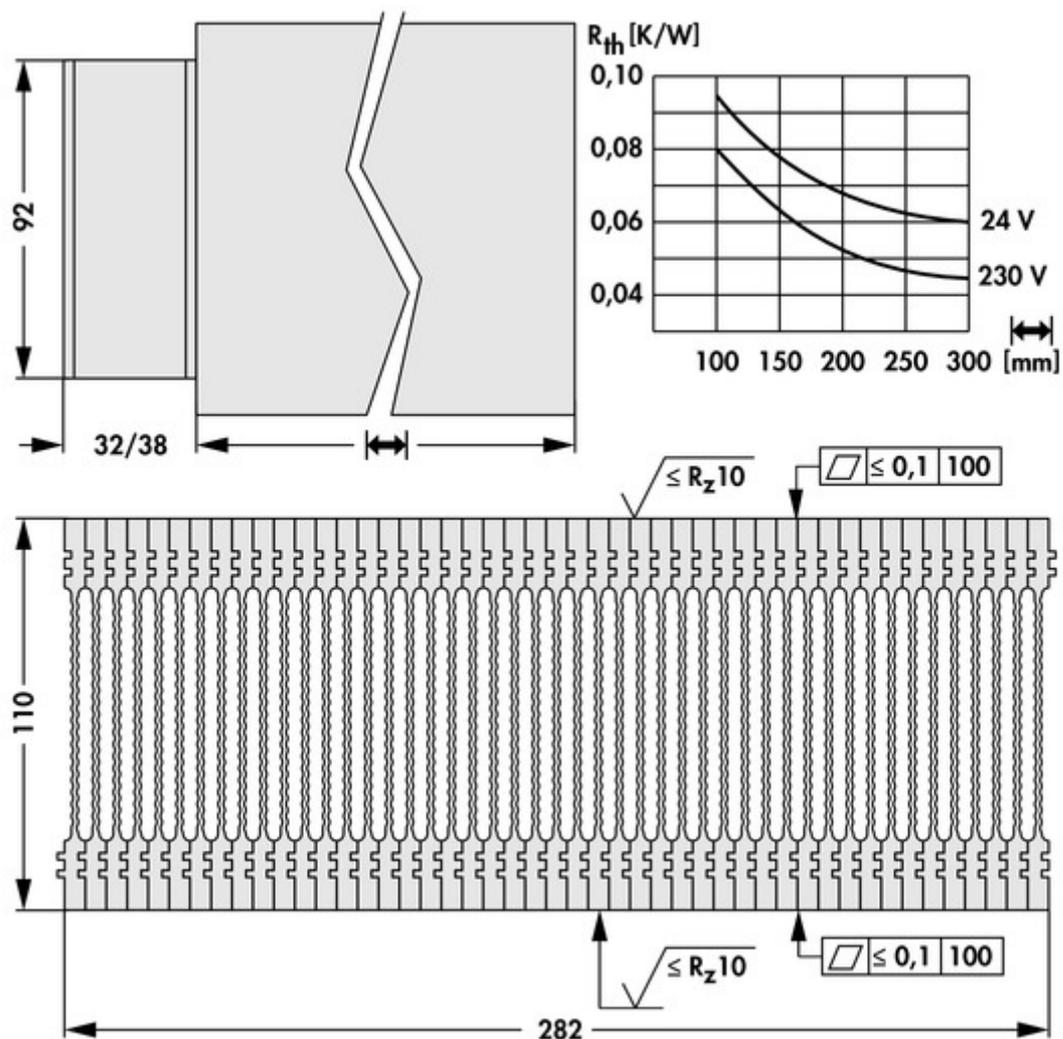

Fan

type: ebmpapst 3314 NHH

dimensions: 92x92x32 mm

tension: 24 V DC

power inout: 3.4 W

max. air volume: 107 m³/h

temperature range: -20°C... 75°C

speed: 3,450 min⁻¹

noise level:	42 dB(A)
weight:	190 g
failure rate (L ₁₀):	L ₁₀ > 57,500 h (40°C)
type:	ebmpapst 3656
dimensions:	92x92x38 mm
tension:	230 V AC
power inout:	12 W
max. air volume:	75 m ³ /h
temperature range:	-40°C... +75°C
speed:	2,700 min ⁻¹
noise level:	37 dB(A)
weight:	420 g
failure rate (L ₁₀):	L ₁₀ > 52,500 h (40°C)