


Home - Fischerelektronik - LA ICK PEN 3 XE

[fischerelektronik.de/web_fischer/en_GB/\\$catalogue/fischerData/PR/LAICKPEN3XE_/datasheet.xhtml](http://fischerelektronik.de/web_fischer/en_GB/$catalogue/fischerData/PR/LAICKPEN3XE_/datasheet.xhtml)


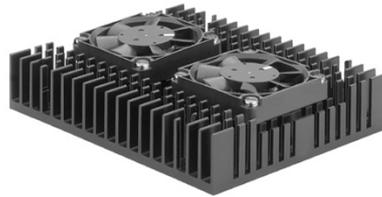


Heatsinks and active heatsinks for processors>Active heatsinks for processors
for Intel Pentium III Xeon

Features

way of fixation:	screw fastening
socket:	Slot 2
thermal resistance:	0.8 K/W
suitable for processor type:	Intel® Pentium® III-Xeon™
dissipation loss:	61.8 W
operating voltage of the fan motor:	12 V
surface:	black anodised
accessories (optional):	molex connection plug

Technical Drawing

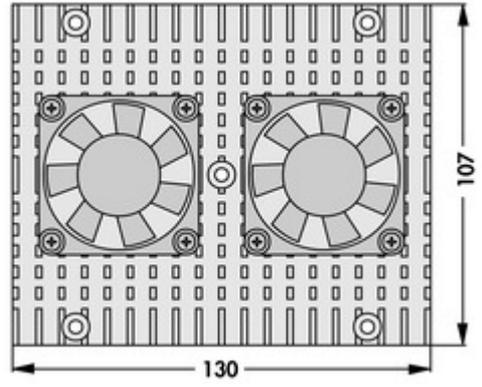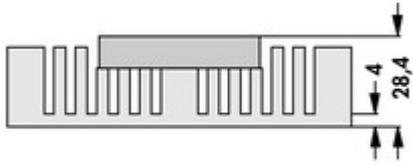

Fan

circuit voltage:	10.2...13.8 V DC
bearing type:	ball bearing
fan dimensions:	50x50x10 mm
cur. consumpt.:	50 mA
max. iuitial current:	140 mA
max. volume flow:	238 l/min 14.3 m ³ /h
max. static pressure:	2.7mm H ₂ O 26.9 Pa
noise level:	22 dB(A), 1 m lateral
temperature range:	-10°C... +70°C
failure rate (L ₁₀):	95,000 h
MTBF:	280,000 h (20°C)
weight:	19 g
cases:	plastic PBT (UL E54695)