

# Home - Fischerelektronik - LA LED 40 x 30

[fischerelektronik.de/web\\_fischer/en\\_GB/\\$catalogue/fischerData/PR/LA\\_LED4030\\_/datasheet.xhtml](http://fischerelektronik.de/web_fischer/en_GB/$catalogue/fischerData/PR/LA_LED4030_/datasheet.xhtml)

## Data sheet Product LA LED 40 x 30 Aluminium natur

- [Print data sheet](#)
- [Recommend page](#)

### Features

way of fixation: 


- therm. conductive foil
- therm. cond. adhesive

thermal resistance: 1.4 K/W

dissipation loss: 35 W

surface: Al-natural

### Technical Drawing

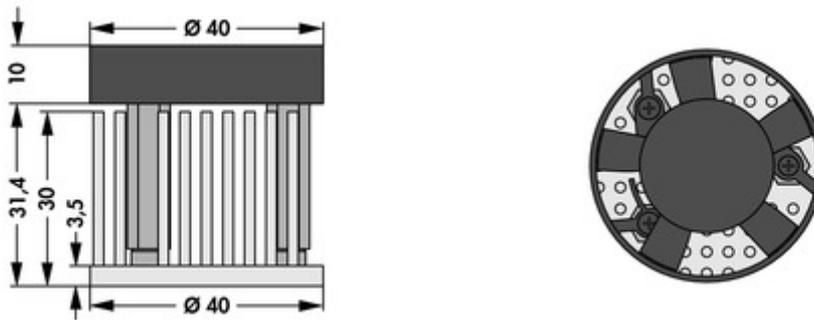

### Fan

---

circuit voltage:	12 V
------------------	------

---

bearing type:	two-way plain bearing
---------------	-----------------------

---

cur. consumpt.:	50 mA
-----------------	-------

---

max. iuitial current:	160 mA
-----------------------	--------

---

max. volume flow:	157 l/min - 9.4 m <sup>3</sup> /h
-------------------	-----------------------------------

---

max. static pressure:	3.4 mmH <sub>2</sub> O - 33 Pa
-----------------------	--------------------------------

---

noise level:	26 dB(A), 1 m lateral
--------------	-----------------------

---

temperature range:	-20°C... +60°C
--------------------	----------------

---

failure rate (L <sub>10</sub> ):	60,000 h
----------------------------------	----------

---

MTBF:	1,900,000 h (20°C)
-------	--------------------

---

Type rotor speed:	6600 min <sup>-1</sup>
-------------------	------------------------

---

weight:	10 g
---------	------