

Home - Fischerelektronik - LA LED 68

fischerelektronik.de/web_fischer/en_GB/VA/LALED68100MEAD/datasheet.xhtml



Data sheet Product LA LED 68 100 ME AD

- [Print data sheet](#)
- [Recommend page](#)

Features


length: 100 mm

thermal resistance: 7 - 2.3 K/W

surface: natural colour anodised

adapter (optional): adapter plate (art. no. AD LED 53)

Technical Drawing

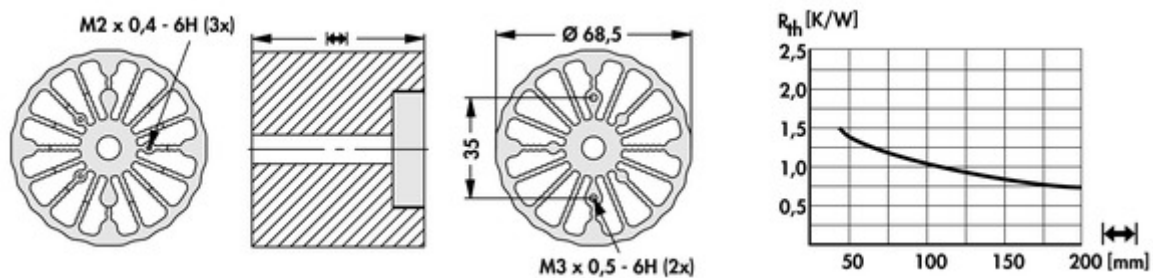

Fan

circuit voltage:	12 V
bearing type:	two-way plain bearing
cur. consumpt.:	50 mA
max. iuitial current:	160 mA
max. volume flow:	157 l/min - 9.4 m ³ /h
max. static pressure:	3.4 mmH ₂ O - 33 Pa
noise level:	26 dB(A), 1 m lateral
temperature range:	-20°C... +60°C
failure rate (L ₁₀):	60,000 h
MTBF:	1,900,000 h (20°C)
Type rotor speed:	6600 min ⁻¹
weight:	10 g