

Home - Fischerelektronik - LA LED 68

fischerelektronik.de/web_fischer/en_GB/VA/LALED6875SA/datasheet.xhtml



Data sheet Product LA LED 68 75 SA

- [Print data sheet](#)
- [Recommend page](#)

Features


length: 75 mm

thermal resistance: 7 - 2.3 K/W

surface: black anodised

adapter (optional): adapter plate (art. no. AD LED 53)

Technical Drawing

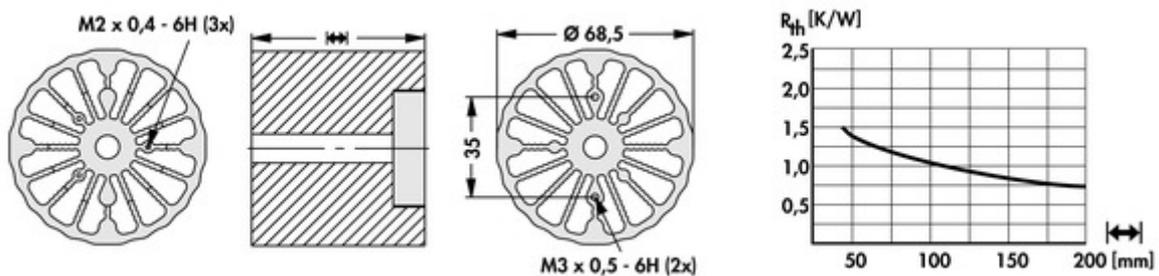

Fan

circuit voltage: 12 V

bearing type: two-way plain bearing

cur. consumpt.: 50 mA

max. iuitial current: 160 mA

max. volume flow: 157 l/min - 9.4 m³/h

max. static pressure: 3.4 mmH₂O - 33 Pa

noise level: 26 dB(A), 1 m lateral

temperature range: -20°C... +60°C

failure rate (L₁₀): 60,000 h

MTBF: 1,900,000 h (20°C)

Type rotor speed: 6600 min⁻¹

weight: 10 g