


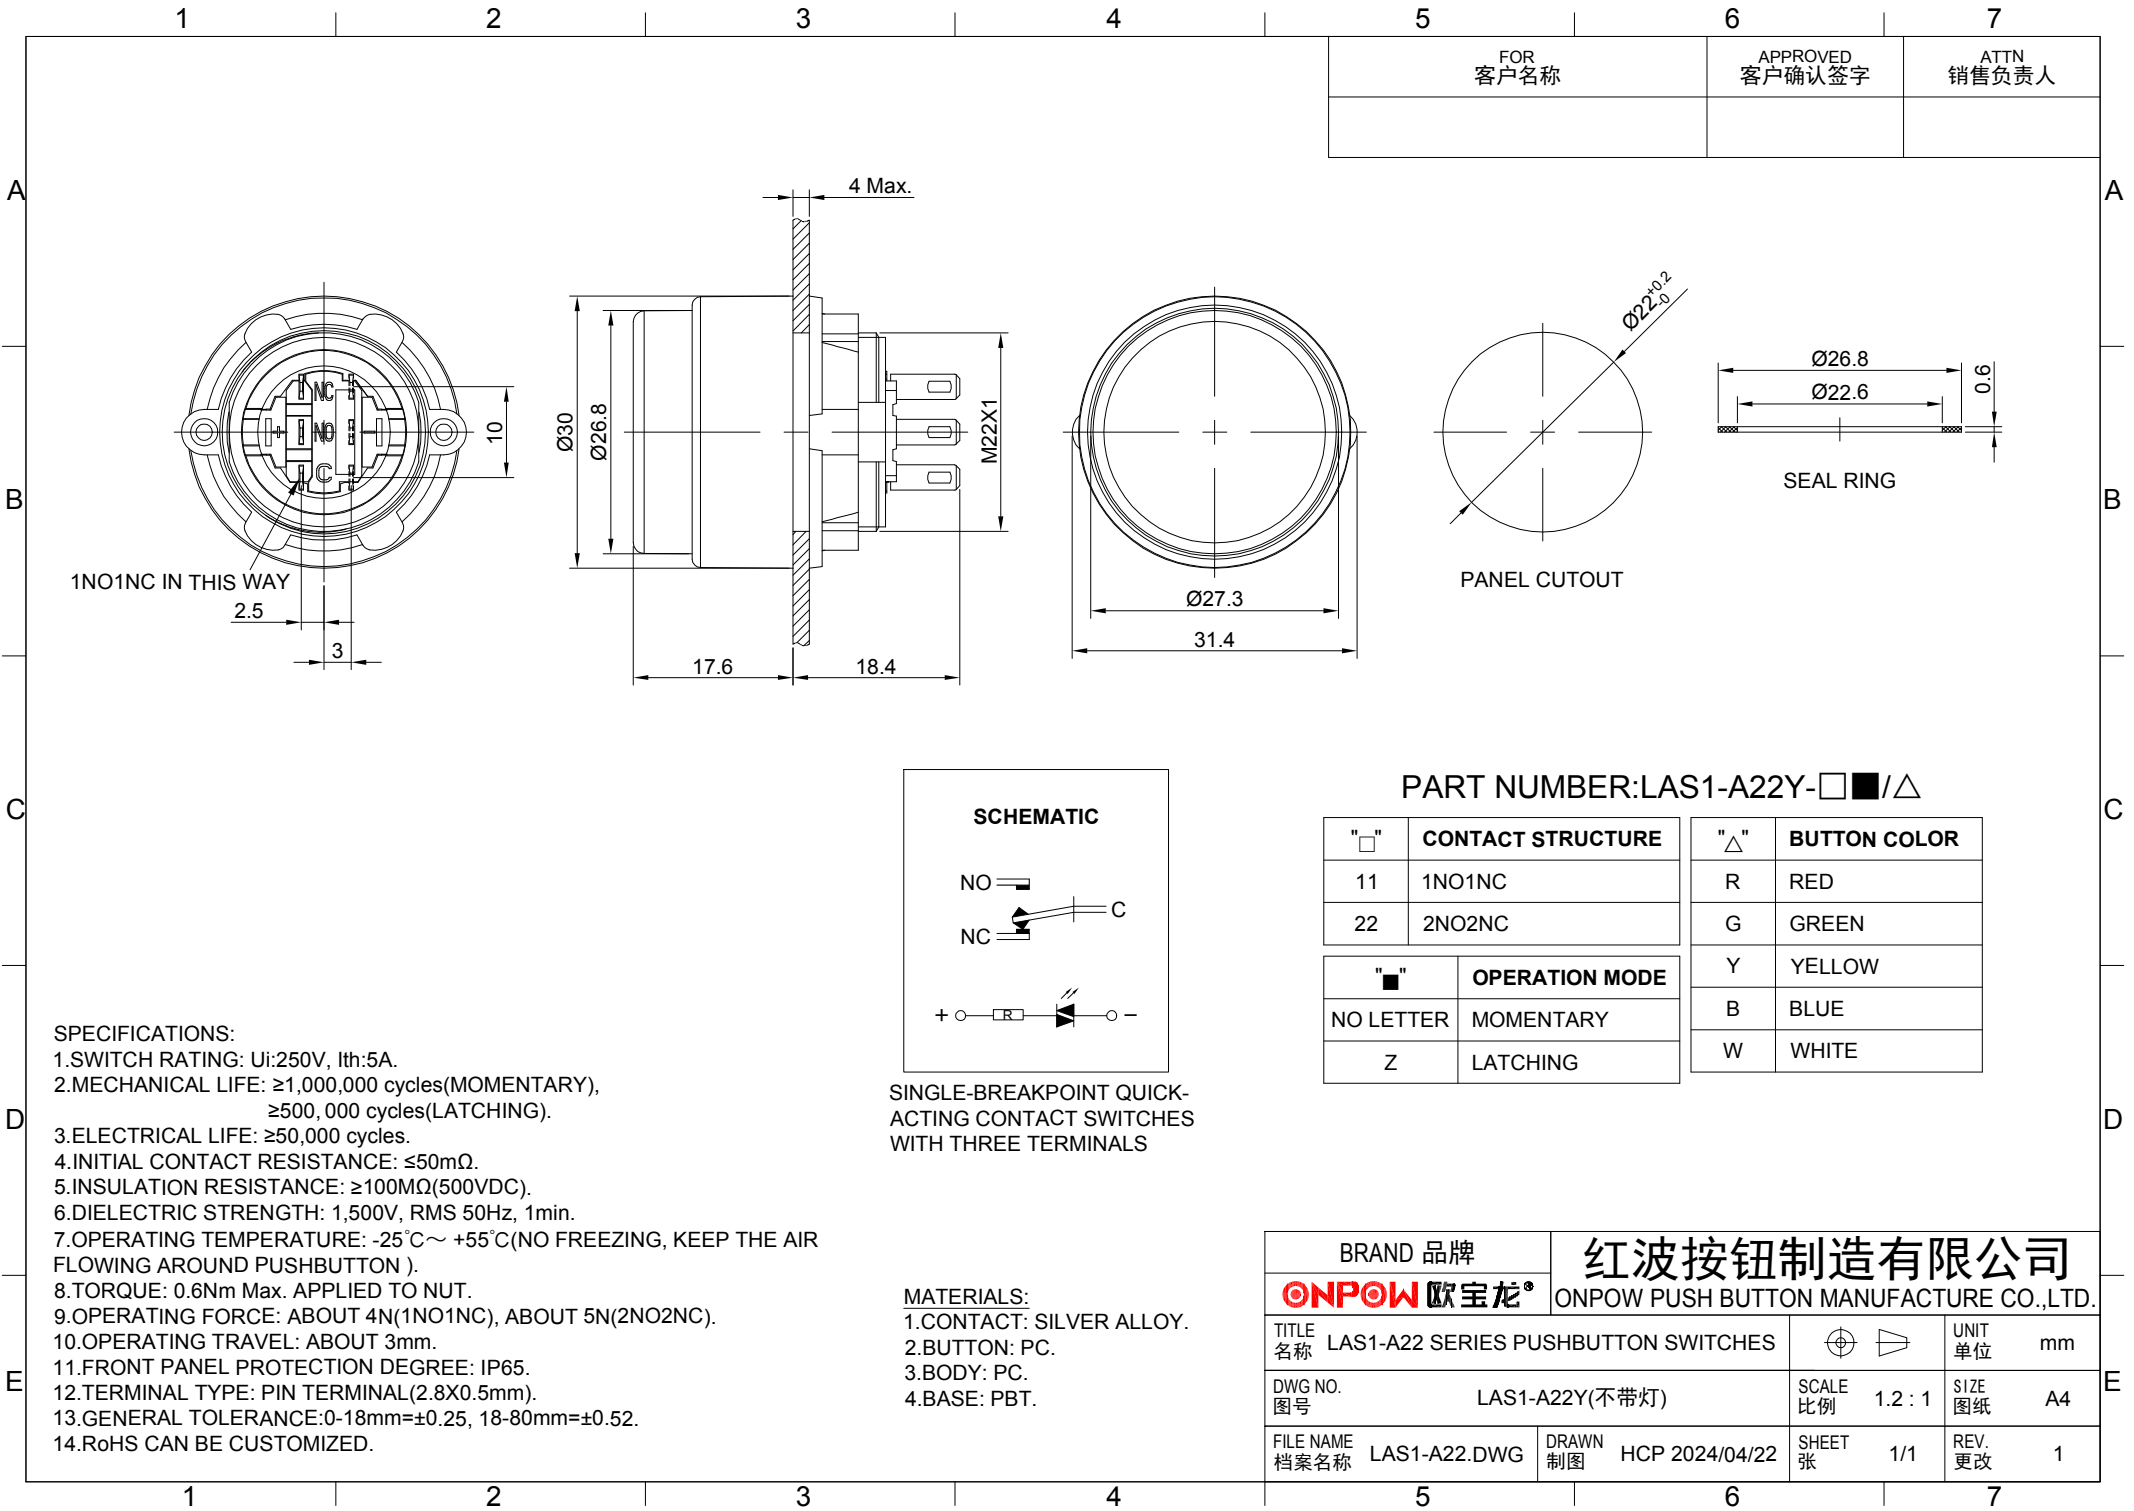

SPECIFICATIONS:

1.SWITCH RATING: U_i :250V, I_{th} :5A.

2.MECHANICAL LIFE: $\geq 1,000,000$ cycles(MOMENTARY),
 $\geq 500,000$ cycles(LATCHING).

3.ELECTRICAL LIFE: $\geq 50,000$ cycles.

4.INITIAL CONTACT RESISTANCE: $\leq 50m\Omega$.

5.INSULATION RESISTANCE: $\geq 100M\Omega$ (500VDC).

6.DIELECTRIC STRENGTH: 1,500V, RMS 50Hz, 1min.

7.OPERATING TEMPERATURE: $-25^{\circ}C \sim +55^{\circ}C$ (NO FREEZING, KEEP THE AIR FLOWING AROUND PUSHBUTTON).

8.TORQUE: 0.6Nm Max. APPLIED TO NUT.

9.OPERATING FORCE: ABOUT 4N(1NO1NC), ABOUT 5N(2NO2NC).


10.OPERATING TRAVEL: ABOUT 3mm.

11.FRONT PANEL PROTECTION DEGREE: IP65.

12.TERMINAL TYPE: PIN TERMINAL(2.8X0.5mm).

13.GENERAL TOLERANCE:0-18mm= ± 0.25 , 18-80mm= ± 0.52 .

14.RoHS CAN BE CUSTOMIZED.

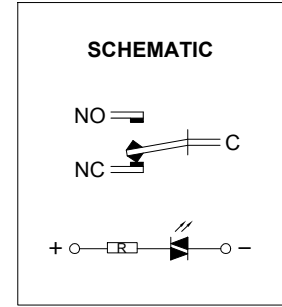

SINGLE-BREAKPOINT QUICK-
ACTING CONTACT SWITCHES
WITH THREE TERMINALS

MATERIALS:

1.CONTACT: SILVER ALLOY.

2.BUTTON: PC.

3.BODY: PC.

4.BASE: PBT.

FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

PART NUMBER:LAS1-A22Y-□■/△

"□"	CONTACT STRUCTURE	"△"	BUTTON COLOR
11	1NO1NC	R	RED
22	2NO2NC	G	GREEN
		Y	YELLOW
		B	BLUE
		W	WHITE

"■"	OPERATION MODE
NO LETTER	MOMENTARY
Z	LATCHING

BRAND 品牌		红波按钮制造有限公司					
ONPOW 欧宝龙®		ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.					
TITLE 名称	LAS1-A22 SERIES PUSHBUTTON SWITCHES			UNIT 单位	mm		
DWG NO. 图号	LAS1-A22Y(不带灯)		SCALE 比例	1.2 : 1	SIZE 图纸	A4	
FILE NAME 档案名称	LAS1-A22.DWG	DRAWN 制图	HCP 2024/04/22	SHEET 张	1/1	REV. 更改	1