
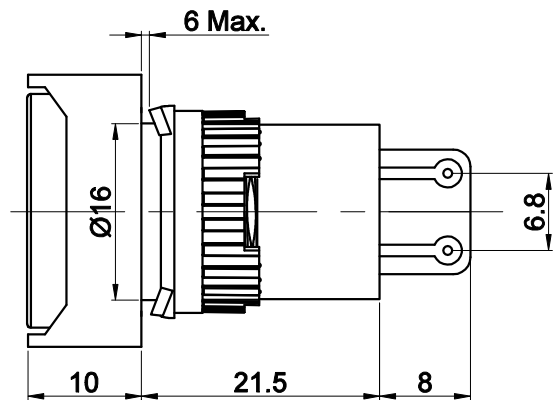


PANEL CUTOUT
MAX.PANEL THICKNESS
6 mm



Seal Ring

SPECIFICATIONS:

- 1.Operating Temperature: -25°C~ +55°C(No Freezing).
- 2.Operating Humidity: 45~85%RH.
- 3.Dielectric Strength: 1000V.
- 4.Rated Sound Pressure &Frequency: 75db (1m) (Rated Voltage) ; 2300±300HZ.

MATERIALS:

- 1.Head: PC.
- 2.Body: PC.

Part Number: LAS1-AJ-■/▲

"■"	Buzzer Mode	"▲"	Lamp voltage
B	Continuous	6V	DC 6V
JB	Discontinuous	12V	DC 12V
		24V	DC 24V
		220V	AC 220V
Other voltage can be made to order			

BRAND 品牌 ONPOW		红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.		USED 用途	APPD 审核 CH 2019/06/12
		FINISH 处理	CHKD 校对 NCH 2019/06/12
		SCALE 比例 1.5 : 1	UNIT 单位 mm
		DR. 制图 ZPD 2019/06/12	
DIMENSIONS		TOLERANCE	
0.00 TO 18.00mm		±0.43mm	
18.01 TO 30.00mm		±0.52mm	
30.01 TO 50.00mm		±0.62mm	
50.01 TO 80.00mm		±0.74mm	
TITLE 名称		LAS1-A Series Buzzer Units	
DWG NO. 图号		LAS1-AJ蜂鸣器	
FILE NAME 档案名称		LAS1-A蜂鸣器.DWG	
SHEET 张		1 / 1	
REV. 更改		1	