


# Home - Fischerelektronik - LA V 7

 [fischerelektronik.de/web\\_fischer/en\\_GB/VA/LAV725012/datasheet.xhtml](http://fischerelektronik.de/web_fischer/en_GB/VA/LAV725012/datasheet.xhtml)

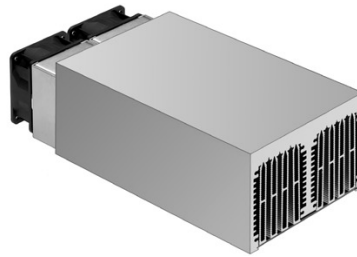

Cooling aggregates>Cooling aggregates with axial fan

125 x 74 mm, with axial fan and air-flow chamber

## Features

width: 125 mm

height: 74 mm

length: 250 mm

thermal resistance: 0.1 - 0.04 K/W



surface:

- raw degreased aluminium (by the metre raw aluminium)
- mounting area(s) milled flat

operating voltage of the fan motor:

- 12 V DC
- 24 V DC

## Technical Drawing

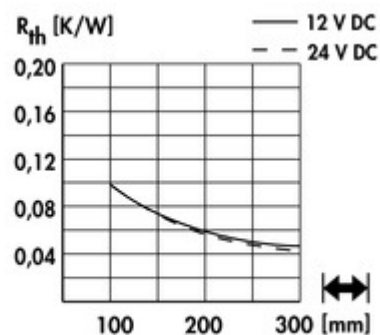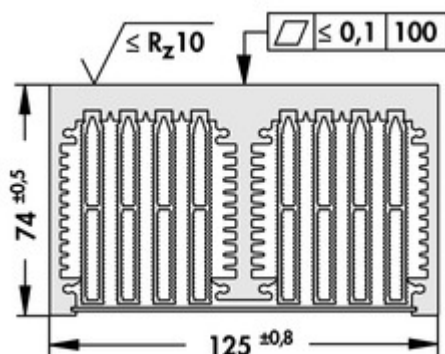

## Fan

---

---

|       |                      |
|-------|----------------------|
| type: | ebmpapst 612 NHH-118 |
|-------|----------------------|

---

|             |             |
|-------------|-------------|
| dimensions: | 60x60x25 mm |
|-------------|-------------|

---

|          |         |
|----------|---------|
| tension: | 12 V DC |
|----------|---------|

---

|              |       |
|--------------|-------|
| power inout: | 2.9 W |
|--------------|-------|

---

|                  |                      |
|------------------|----------------------|
| max. air volume: | 56 m <sup>3</sup> /h |
|------------------|----------------------|

---

|                    |                |
|--------------------|----------------|
| temperature range: | -20°C... +70°C |
|--------------------|----------------|

---

|        |                         |
|--------|-------------------------|
| speed: | 6,800 min <sup>-1</sup> |
|--------|-------------------------|

---

|              |          |
|--------------|----------|
| noise level: | 41 dB(A) |
|--------------|----------|

---

|         |      |
|---------|------|
| weight: | 66 g |
|---------|------|

---

|                                  |                                   |
|----------------------------------|-----------------------------------|
| failure rate (L <sub>10</sub> ): | L <sub>10</sub> > 60,000 h (40°C) |
|----------------------------------|-----------------------------------|

---

|       |                      |
|-------|----------------------|
| type: | ebmpapst 614 NHH-119 |
|-------|----------------------|

---

|             |             |
|-------------|-------------|
| dimensions: | 60x60x25 mm |
|-------------|-------------|

---

|          |         |
|----------|---------|
| tension: | 24 V DC |
|----------|---------|

---

|              |       |
|--------------|-------|
| power inout: | 2.9 W |
|--------------|-------|

---

|                  |                      |
|------------------|----------------------|
| max. air volume: | 56 m <sup>3</sup> /h |
|------------------|----------------------|

---

|                    |                |
|--------------------|----------------|
| temperature range: | -20°C... +70°C |
|--------------------|----------------|

---

|        |                         |
|--------|-------------------------|
| speed: | 6,850 min <sup>-1</sup> |
|--------|-------------------------|

---

---

|              |          |
|--------------|----------|
| noise level: | 41 dB(A) |
|--------------|----------|

---

|         |      |
|---------|------|
| weight: | 66 g |
|---------|------|

---

|                                  |                                   |
|----------------------------------|-----------------------------------|
| failure rate (L <sub>10</sub> ): | L <sub>10</sub> > 60,000 h (40°C) |
|----------------------------------|-----------------------------------|

**Fischer Elektronik GmbH & Co. KG**  
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
58511 Lüdenscheid

Telefon +49 2351 435-0  
Telefax +49 2351 45754

info@fischerelektronik.de  
www.fischerelektronik.de