


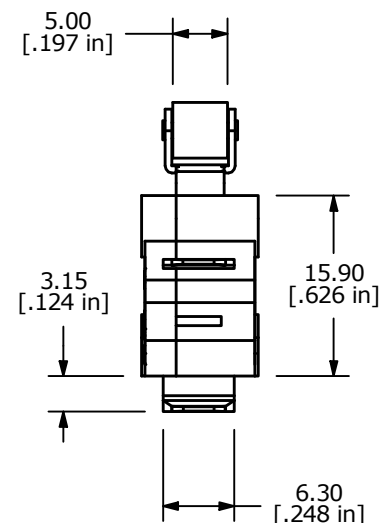
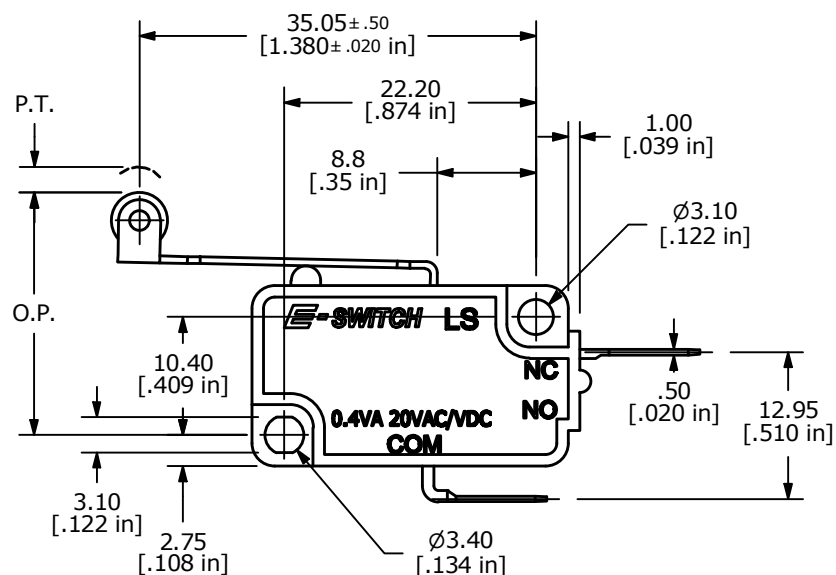


| ▲ | O.P. (MM)  | P.T. (MM) |
|---|------------|-----------|
|   | 20.7 ± 1.5 | 4.0 MAX.  |

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL

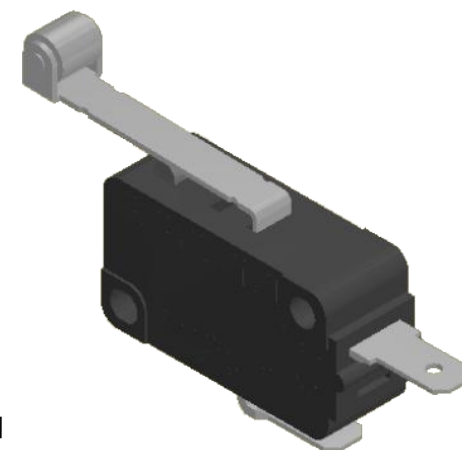

CIRCUIT: SPST  
NORMALLY CLOSED

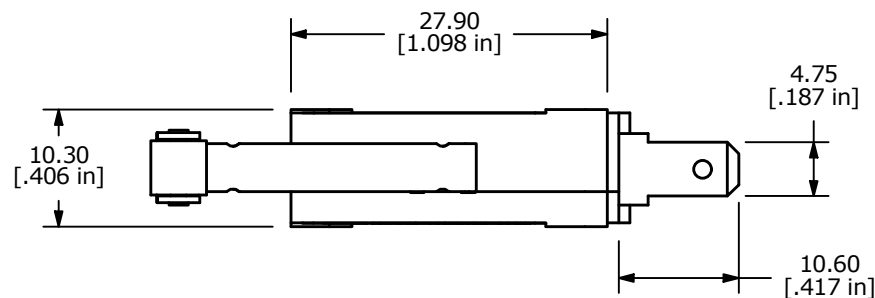

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
3. RATING: 0.4VA @ 20 VDC or VAC Max.
- ▲ 4. OPERATING FORCE: 120 ± 40 GRAMS
5. OPERATING TEMP: -25°C to 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 MILLI -OHMS Max.
11. ▲ DENOTES CRITICAL PARAMETER

| REV | ECO NO     | DESCRIPTION                | DATE     | BY | E-SWITCH®              |           |     |         | OBJECT ID |
|-----|------------|----------------------------|----------|----|------------------------|-----------|-----|---------|-----------|
| B   | ECO-100836 | REMOVE VDE RATING AND LOGO | 04/18/22 | JS | TITLE LS085R106F120C1B |           |     |         | 000021048 |
|     |            |                            |          |    | SCALE                  | DATE      | DR  | DWG     | REV       |
|     |            |                            |          |    | 3:2                    | 8/18/2008 | BLR | Q950061 | B         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED