


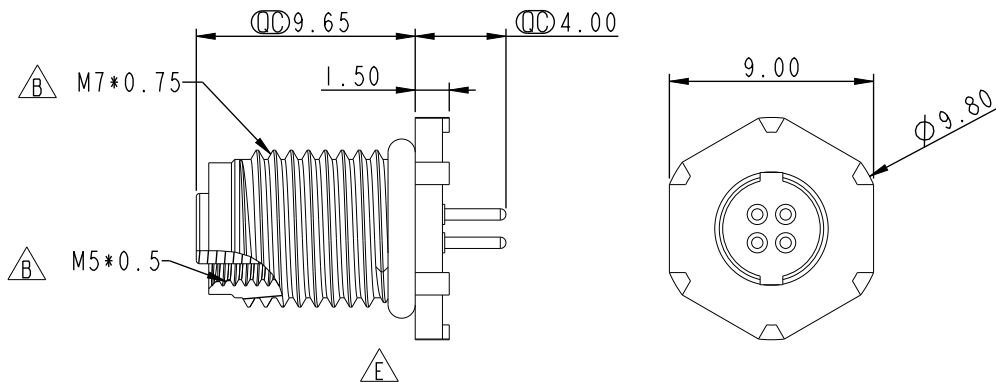


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C221973	2022/12/26	Ruru	<u>C</u> XI
D	C230426	2023/03/28	Jerry Hsiao	<u>D</u> XI
E	C240346	2024/04/01	Hubert	<u>E</u> XI

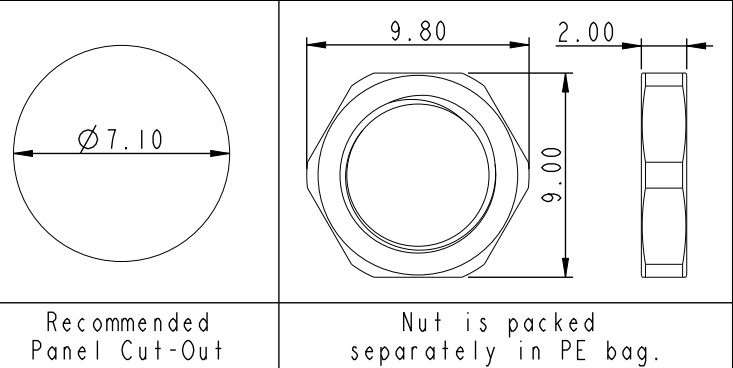

2Pin	3Pin	4Pin

Recommended PCB Cut-Out

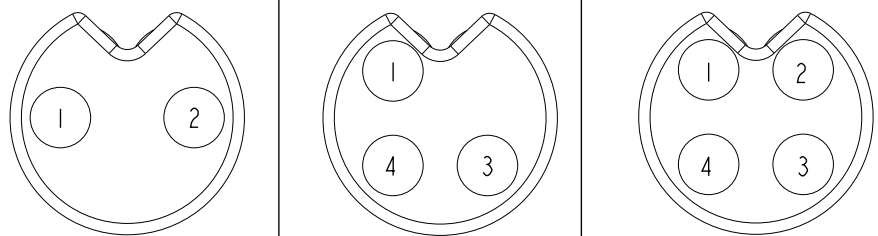

Pin Assignments Front View

UNIT: mm				TITLE	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				N SEN, M5, SCREW RECEPTACLE, F, PCB S	
		SCALE	3:1	SIZE	A4
		SHEET	1	OF	1
		REV.	E	NC-REV.	.0
		 : Inspection item			

M5-XXPFFP-SF700I
XX:NO.OF Pin

Note

- *  Important Dimension To Check
- *  Waterproof Rate: IP67, Unmated.
- * Connector
 - Housing: Thermoplastic, Black.
 - Pin: Copper Alloy, Gold Plated.
 - O-Ring: Rubber, Green.
- * Shield: Metal.
- * Nut: Metal.
- * O-Ring: Rubber, Gray.
- * For Panel Thickness Max 4.0mm.
- * Recommend pcb thickness: 1.6mm.
- * Nut is packed separately in PE bags.
- * RoHS Compliant.

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Hubert	2024/04/01
DWG NO	CHECKED BY	DATE
M5-XXPFFP-SF7001	Aric	2024/04/01
CUSTOMER	APPROVED BY	DATE
ALTW	Fred	2024/04/01