




F

F

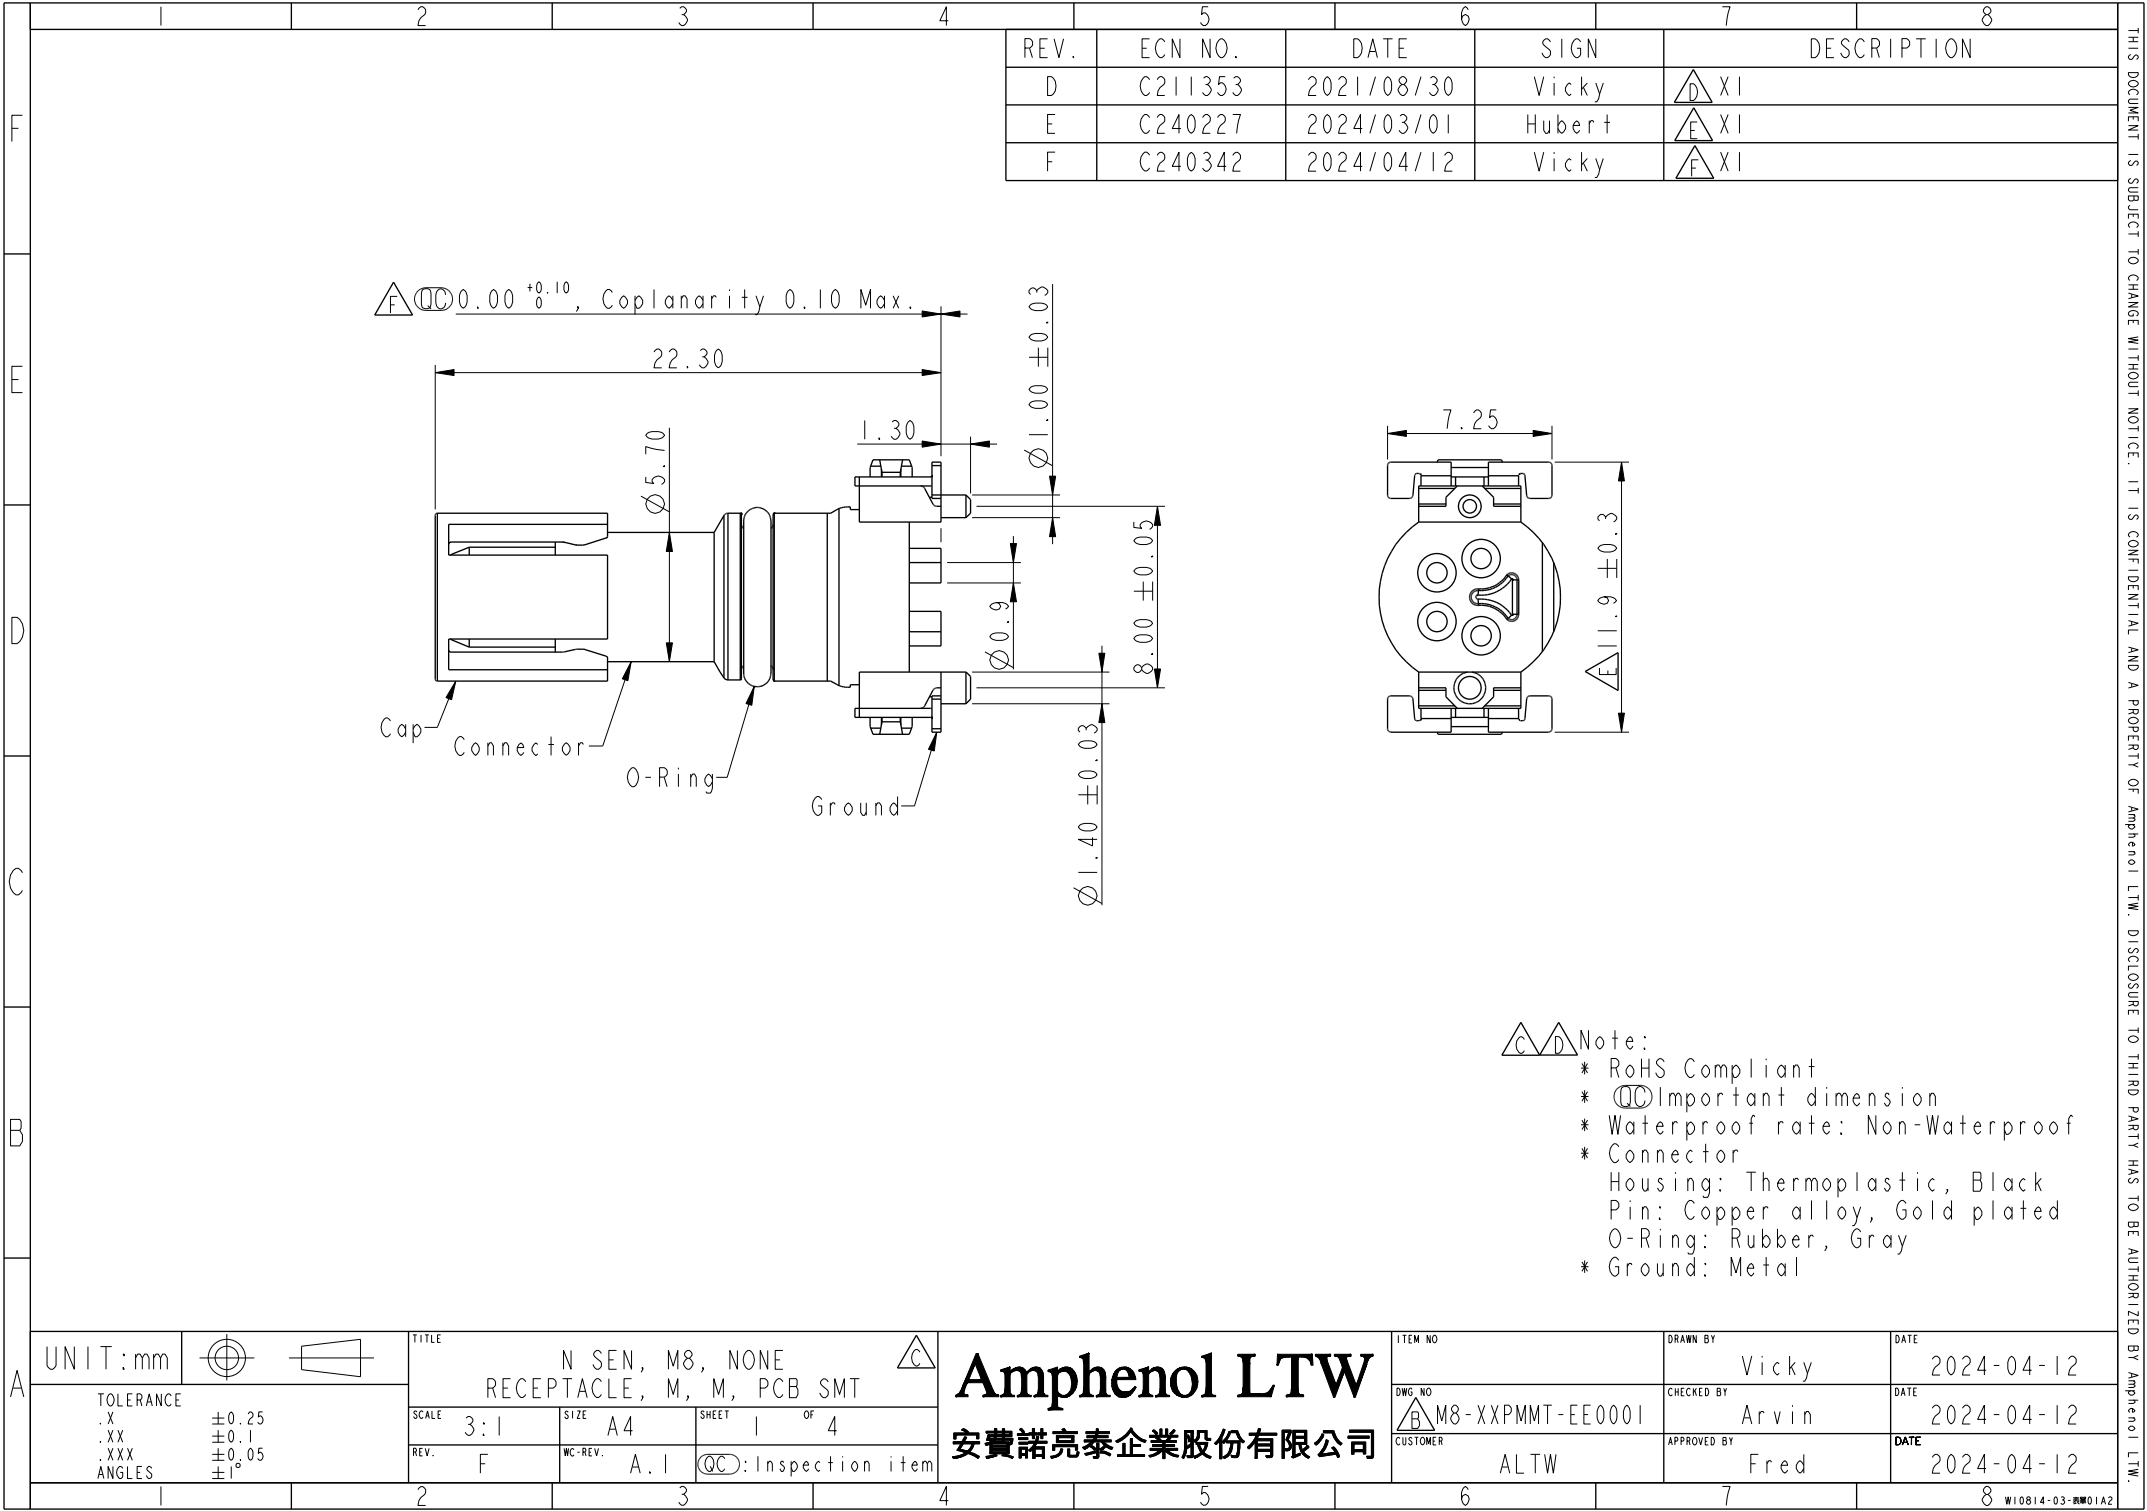

C



B



A


ANGLES

[illegible]




2024-04-12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Tape & Reel Information:

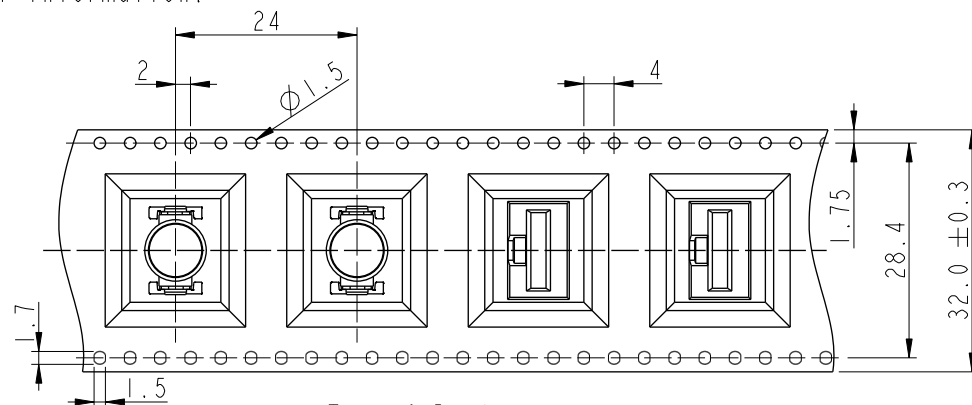

Note:
*  Connector Orientation Follow Drawing

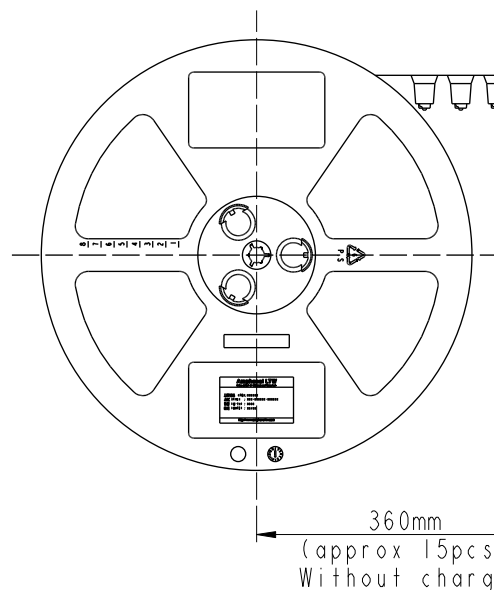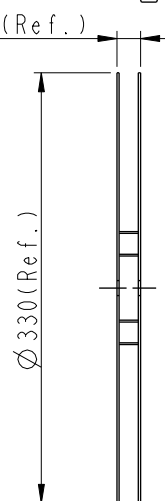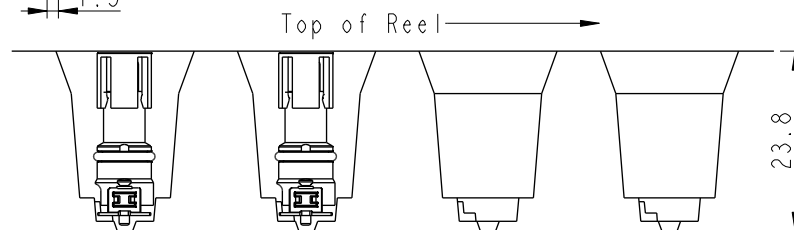

Top of Reel →


Wide Cover Tape Around
Out Periphery 1 Turn

Peeling Strength 0.1~1.3N Max.
(300±10mm/min)
Peeling Angle
165~180°

100 PCS/Reel
With Product Charge

360mm
(approx 15pcs)
Without Charge

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE

N SEN, M8, NONE
RECEPTACLE, M, M, PCB SMT

SCALE

Free

SIZE

A4

SHEET

3

OF

4

REV.

F

WC-REV.

A.1

QC: Inspection item



Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

B M8-XXPMMT-EE0001

CUSTOMER

ALTW

DRAWN BY

Vicky

CHECKED BY

Arvin

APPROVED BY

Fred

DATE

2024-04-12

DATE



2024-04-12

DATE


2024-04-12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Package:

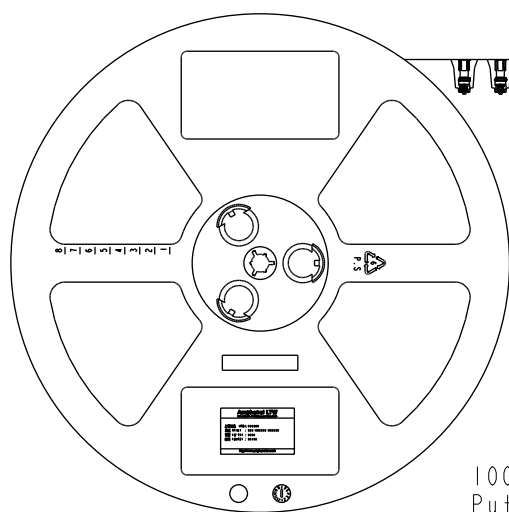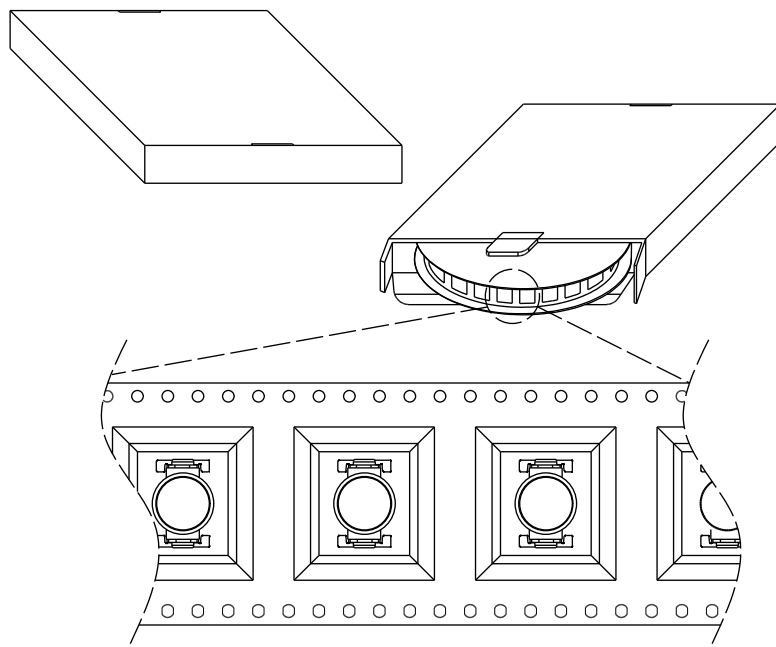


100 PCS(Connector)/Tape&Reel,
Put in a Box

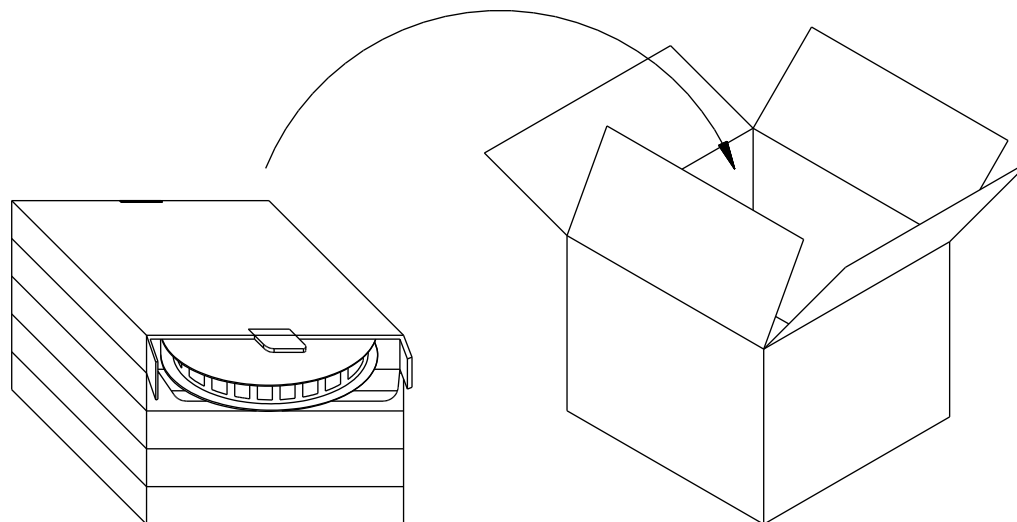

One Carton can put in the 5PCS(Max.) Box
(500 PCS/Carton)

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE

N SEN, M8, NONE
RECEPTACLE, M, M, PCB SMT



SCALE Free

SIZE A4

SHEET 4 OF 4

REV. F

WC-REV. A.1

QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

M8-XXPMMT-EE0001

CUSTOMER

ALTW

DRAWN BY

Vicky

CHECKED BY

Arvin

APPROVED BY

Fred

DATE

2024-04-12

DATE

2024-04-12

DATE

2024-04-12