

Thyristor \ Diode Module

$$V_{RRM} = 2 \times 1200 \text{ V}$$


$$I_{TAV} = 50 \text{ A}$$

$$V_T = 1.17 \text{ V}$$

Phase leg


Part number

MCMA50PD1200TB

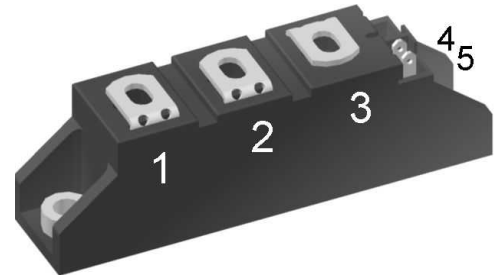

Backside: isolated

 E72873



Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al₂O₃-ceramic

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-240AA

- Isolation Voltage: 4800 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Terms .Conditions of usage:

The data contained in this product data sheet is exclusively intended for technically trained staff. The user will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to his application. The specifications of our components may not be considered as an assurance of component characteristics. The information in the valid application- and assembly notes must be considered. Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of your product, please contact your local sales office.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact your local sales office.

Should you intend to use the product in aviation, in health or life endangering or life support applications, please notify. For any such application we urgently recommend


- to perform joint risk and quality assessments;

- the conclusion of quality agreements;

- to establish joint measures of an ongoing product survey, and that we may make delivery dependent on the realization of any such measures.

Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1300	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1200	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1200\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			100	μA
		$V_{R/D} = 1200\text{ V}$	$T_{VJ} = 140^{\circ}\text{C}$			6	mA
V_T	forward voltage drop	$I_T = 50\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.25	V
		$I_T = 100\text{ A}$				1.48	V
		$I_T = 50\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			1.17	V
		$I_T = 100\text{ A}$				1.44	V
I_{TAV}	average forward current	$T_C = 85^{\circ}\text{C}$	$T_{VJ} = 140^{\circ}\text{C}$			50	A
$I_{T(RMS)}$	RMS forward current	180° sine				79	A
V_{T0}	threshold voltage	} for power loss calculation only	$T_{VJ} = 140^{\circ}\text{C}$			0.89	V
r_T	slope resistance					5.3	m Ω
R_{thJC}	thermal resistance junction to case					0.7	K/W
R_{thCH}	thermal resistance case to heatsink				0.20		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$			160	W
I_{TSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			800	A
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			865	A
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 140^{\circ}\text{C}$			680	A
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			735	A
I^2t	value for fusing	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			3.20	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			3.12	kA ² s
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 140^{\circ}\text{C}$			2.31	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			2.25	kA ² s
C_J	junction capacitance	$V_R = 400\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		32		pF
P_{GM}	max. gate power dissipation	$t_p = 30\text{ }\mu\text{s}$	$T_C = 140^{\circ}\text{C}$			10	W
		$t_p = 300\text{ }\mu\text{s}$				5	W
P_{GAV}	average gate power dissipation					0.5	W
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 140^{\circ}\text{C}; f = 50\text{ Hz}$ repetitive, $I_T = 150\text{ A}$				150	A/ μs
		$t_p = 200\text{ }\mu\text{s}; di_G/dt = 0.45\text{ A}/\mu\text{s};$ $I_G = 0.45\text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 50\text{ A}$				500	A/ μs
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$	$T_{VJ} = 140^{\circ}\text{C}$			1000	V/ μs
		$R_{GK} = \infty$; method 1 (linear voltage rise)					
V_{GT}	gate trigger voltage	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			1.5	V
			$T_{VJ} = -40^{\circ}\text{C}$			1.6	V
I_{GT}	gate trigger current	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			78	mA
			$T_{VJ} = -40^{\circ}\text{C}$			200	mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 140^{\circ}\text{C}$			0.2	V
I_{GD}	gate non-trigger current					5	mA
I_L	latching current	$t_p = 10\text{ }\mu\text{s}$	$T_{VJ} = 25^{\circ}\text{C}$			200	mA
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
I_H	holding current	$V_D = 6\text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^{\circ}\text{C}$			100	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^{\circ}\text{C}$			2	μs
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
t_q	turn-off time	$V_R = 100\text{ V}; I_T = 50\text{ A}; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^{\circ}\text{C}$ $di/dt = 10\text{ A}/\mu\text{s}$ $dv/dt = 20\text{ V}/\mu\text{s}$ $t_p = 200\text{ }\mu\text{s}$			150		μs

Package TO-240AA				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I _{RMS}	RMS current	per terminal				100	A
T _{VJ}	virtual junction temperature			-40		140	°C
T _{op}	operation temperature			-40		125	°C
T _{stg}	storage temperature			-40		125	°C
Weight					81		g
M _D	mounting torque			2.5		4	Nm
M _T	terminal torque			2.5		4	Nm
d _{Spp/App}	creepage distance on surface striking distance through air	terminal to terminal	13.0	9.7			mm
d _{Spb/Apb}		terminal to backside	16.0	16.0			mm
V _{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; I _{ISOL} ≤ 1 mA		4800		V
		t = 1 minute			4000		V

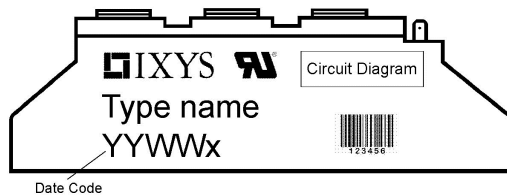

Part description

M = Module
 C = Thyristor (SCR)
 M = Thyristor
 A = (up to 1800V)
 50 = Current Rating [A]
 PD = Phase leg
 1200 = Reverse Voltage [V]
 TB = TO-240AA-1B

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCMA50PD1200TB	MCMA50PD1200TB	Box	36	515035

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 140^\circ\text{C}$

		Thyristor	
$V_{0\max}$	threshold voltage	0.89	V
$R_{0\max}$	slope resistance *	4.1	mΩ

Technical drawing of a 5-pin DIN connector. The drawing shows the front and side views with the following dimensions:

- Overall length: 92 ± 0.5
- Length from first pin to last pin: 80 ± 0.3
- Pin spacing (between pins 1 and 2): 10 ± 0.1
- Pin diameter: 5.5 ± 0.1
- Pin 1 thread: M5
- Pin 2 thread: M5
- Pin 3 thread: M5
- Pin 4 thread: M5
- Pin 5 thread: M5
- Pin 6 thread: M5
- Pin 7 thread: M5
- Pin 8 thread: M5
- Pin 9 thread: M5
- Pin 10 thread: M5
- Pin 11 thread: M5
- Pin 12 thread: M5
- Pin 13 thread: M5
- Pin 14 thread: M5
- Pin 15 thread: M5
- Pin 16 thread: M5
- Pin 17 thread: M5
- Pin 18 thread: M5
- Pin 19 thread: M5
- Pin 20 thread: M5
- Pin 21 thread: M5
- Pin 22 thread: M5
- Pin 23 thread: M5
- Pin 24 thread: M5
- Pin 25 thread: M5
- Pin 26 thread: M5
- Pin 27 thread: M5
- Pin 28 thread: M5
- Pin 29 thread: M5
- Pin 30 thread: M5
- Pin 31 thread: M5
- Pin 32 thread: M5
- Pin 33 thread: M5
- Pin 34 thread: M5
- Pin 35 thread: M5
- Pin 36 thread: M5
- Pin 37 thread: M5
- Pin 38 thread: M5
- Pin 39 thread: M5
- Pin 40 thread: M5
- Pin 41 thread: M5
- Pin 42 thread: M5
- Pin 43 thread: M5
- Pin 44 thread: M5
- Pin 45 thread: M5
- Pin 46 thread: M5
- Pin 47 thread: M5
- Pin 48 thread: M5
- Pin 49 thread: M5
- Pin 50 thread: M5
- Pin 51 thread: M5
- Pin 52 thread: M5
- Pin 53 thread: M5
- Pin 54 thread: M5
- Pin 55 thread: M5
- Pin 56 thread: M5
- Pin 57 thread: M5
- Pin 58 thread: M5
- Pin 59 thread: M5
- Pin 60 thread: M5
- Pin 61 thread: M5
- Pin 62 thread: M5
- Pin 63 thread: M5
- Pin 64 thread: M5
- Pin 65 thread: M5
- Pin 66 thread: M5
- Pin 67 thread: M5
- Pin 68 thread: M5
- Pin 69 thread: M5
- Pin 70 thread: M5
- Pin 71 thread: M5
- Pin 72 thread: M5
- Pin 73 thread: M5
- Pin 74 thread: M5
- Pin 75 thread: M5
- Pin 76 thread: M5
- Pin 77 thread: M5
- Pin 78 thread: M5
- Pin 79 thread: M5
- Pin 80 thread: M5
- Pin 81 thread: M5
- Pin 82 thread: M5
- Pin 83 thread: M5
- Pin 84 thread: M5
- Pin 85 thread: M5
- Pin 86 thread: M5
- Pin 87 thread: M5
- Pin 88 thread: M5
- Pin 89 thread: M5
- Pin 90 thread: M5
- Pin 91 thread: M5
- Pin 92 thread: M5
- Pin 93 thread: M5
- Pin 94 thread: M5
- Pin 95 thread: M5
- Pin 96 thread: M5
- Pin 97 thread: M5
- Pin 98 thread: M5
- Pin 99 thread: M5
- Pin 100 thread: M5
- Pin 101 thread: M5
- Pin 102 thread: M5
- Pin 103 thread: M5
- Pin 104 thread: M5
- Pin 105 thread: M5
- Pin 106 thread: M5
- Pin 107 thread: M5
- Pin 108 thread: M5
- Pin 109 thread: M5
- Pin 110 thread: M5
- Pin 111 thread: M5
- Pin 112 thread: M5
- Pin 113 thread: M5
- Pin 114 thread: M5
- Pin 115 thread: M5
- Pin 116 thread: M5
- Pin 117 thread: M5
- Pin 118 thread: M5
- Pin 119 thread: M5
- Pin 120 thread: M5
- Pin 121 thread: M5
- Pin 122 thread: M5
- Pin 123 thread: M5
- Pin 124 thread: M5
- Pin 125 thread: M5
- Pin 126 thread: M5
- Pin 127 thread: M5
- Pin 128 thread: M5
- Pin 129 thread: M5
- Pin 130 thread: M5
- Pin 131 thread: M5
- Pin 132 thread: M5
- Pin 133 thread: M5
- Pin 134 thread: M5
- Pin 135 thread: M5
- Pin 136 thread: M5
- Pin 137 thread: M5
- Pin 138 thread: M5
- Pin 139 thread: M5
- Pin 140 thread: M5
- Pin 141 thread: M5
- Pin 142 thread: M5
- Pin 143 thread: M5
- Pin 144 thread: M5
- Pin 145 thread: M5
- Pin 146 thread: M5
- Pin 147 thread: M5
- Pin 148 thread: M5
- Pin 149 thread: M5
- Pin 150 thread: M5
- Pin 151 thread: M5
- Pin 152 thread: M5
- Pin 153 thread: M5
- Pin 154 thread: M5
- Pin 155 thread: M5
- Pin 156 thread: M5
- Pin 157 thread: M5
- Pin 158 thread: M5
- Pin 159 thread: M5
- Pin 160 thread: M5
- Pin 161 thread: M5
- Pin 162 thread: M5
- Pin 163 thread: M5
- Pin 164 thread: M5
- Pin 165 thread: M5
- Pin 166 thread: M5
- Pin 167 thread: M5
- Pin 168 thread: M5
- Pin 169 thread: M5
- Pin 170 thread: M5
- Pin 171 thread: M5
- Pin 172 thread: M5
- Pin 173 thread: M5
- Pin 174 thread: M5
- Pin 175 thread: M5
- Pin 176 thread: M5
- Pin 177 thread: M5
- Pin 178 thread: M5
- Pin 179 thread: M5
- Pin 180 thread: M5
- Pin 181 thread: M5
- Pin 182 thread: M5
- Pin 183 thread: M5
- Pin 184 thread: M5
- Pin 185 thread: M5
- Pin 186 thread: M5
- Pin 187 thread: M5
- Pin 188 thread: M5
- Pin 189 thread: M5
- Pin 190 thread: M5
- Pin 191 thread: M5
- Pin 192 thread: M5
- Pin 193 thread: M5
- Pin 194 thread: M5
- Pin 195 thread: M5
- Pin 196 thread: M5
- Pin 197 thread: M5
- Pin 198 thread: M5
- Pin 199 thread: M5
- Pin 200 thread: M5
- Pin 201 thread: M5
- Pin 202 thread: M5
- Pin 203 thread: M5
- Pin 204 thread: M5
- Pin 205 thread: M5
- Pin 206 thread: M5
- Pin 207 thread: M5
- Pin 208 thread: M5
- Pin 209 thread: M5
- Pin 210 thread: M5
- Pin 211 thread: M5
- Pin 212 thread: M5
- Pin 213 thread: M5
- Pin 214 thread: M5
- Pin 215 thread: M5
- Pin 216 thread: M5
- Pin 217 thread: M5
- Pin 218 thread: M5
- Pin 219 thread: M5
- Pin 220 thread: M5
- Pin 221 thread: M5
- Pin 222 thread: M5
- Pin 223 thread: M5
- Pin 224 thread: M5
- Pin 225 thread: M5
- Pin 226 thread: M5
- Pin 227 thread: M5
- Pin 228 thread: M5
- Pin 229 thread: M5
- Pin 230 thread: M5
- Pin 231 thread: M5
- Pin 232 thread: M5
- Pin 233 thread: M5
- Pin 234 thread: M5
- Pin 235 thread: M5
- Pin 236 thread: M5
- Pin 237 thread: M5
- Pin 238 thread: M5
- Pin 239 thread: M5
- Pin 240 thread: M5
- Pin 241 thread: M5
- Pin 242 thread: M5
- Pin 243 thread: M5
- Pin 244 thread: M5
- Pin 245 thread: M5
- Pin 246 thread: M5
- Pin 247 thread: M5
- Pin 248 thread: M5
- Pin 249 thread: M5
- Pin 250 thread: M5
- Pin 251 thread: M5
- Pin 252 thread: M5
- Pin 253 thread: M5
- Pin 254 thread: M5
- Pin 255 thread: M5
- Pin 256 thread: M5
- Pin 257 thread: M5
- Pin 258 thread: M5
- Pin 259 thread: M5
- Pin 260 thread: M5
- Pin 261 thread: M5
- Pin 262 thread: M5
- Pin 263 thread: M5
- Pin 264 thread: M5
- Pin 265 thread: M5
- Pin 266 thread: M5
- Pin 267 thread: M5
- Pin 268 thread: M5
- Pin 269 thread: M5
- Pin 270 thread: M5
- Pin

Thyristor

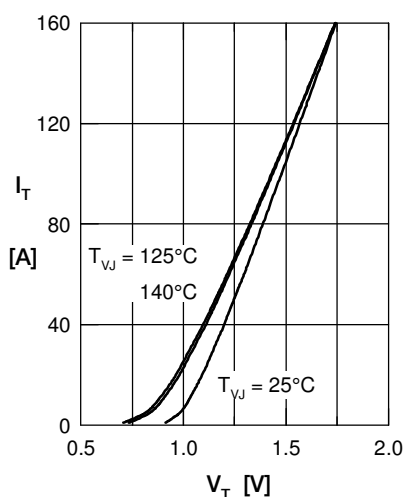


Fig. 1 Forward characteristics

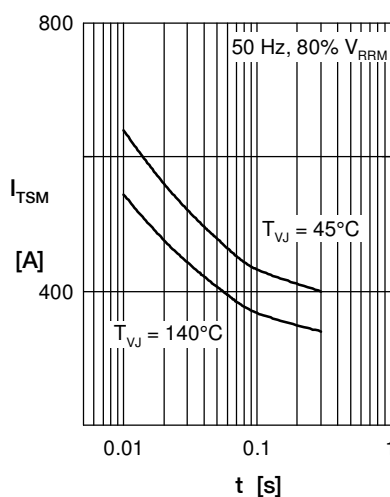


Fig. 2 Surge overload current
 I_{TSM} : crest value, t : duration

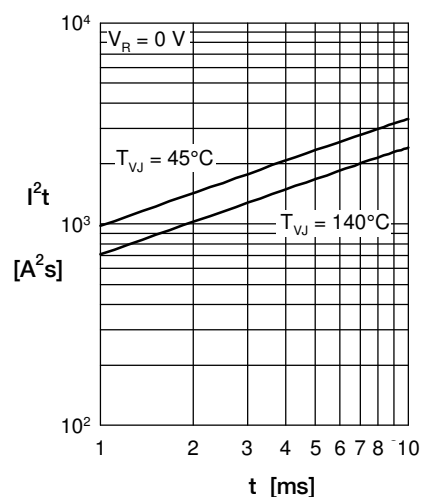


Fig. 3 I^2t versus time (1-10 s)

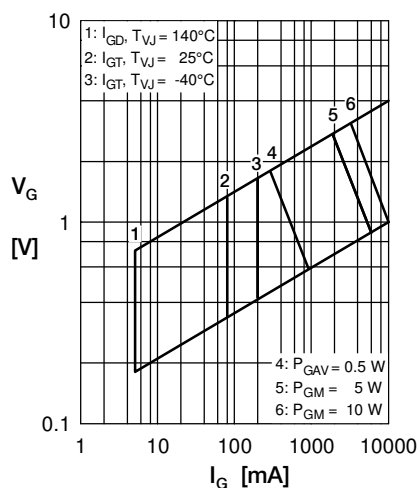


Fig. 4 Gate voltage & gate current

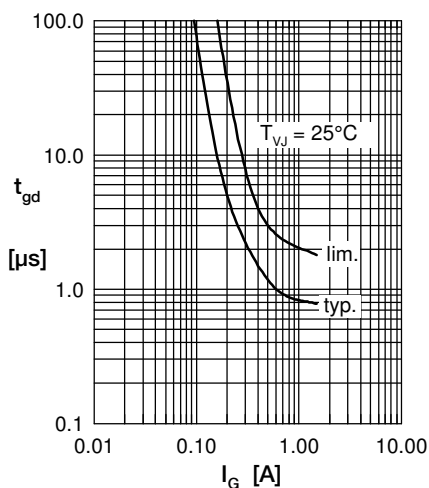


Fig. 5 Gate controlled delay time t_{gd}

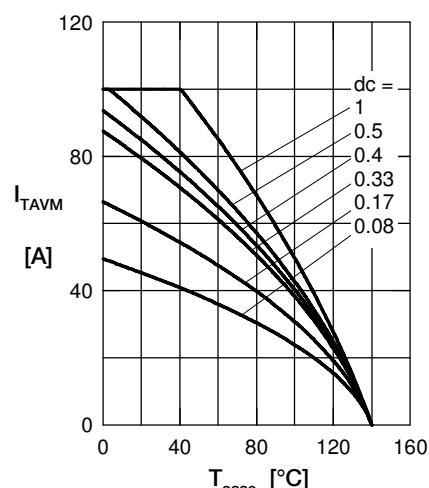


Fig. 6 Max. forward current at case temperature

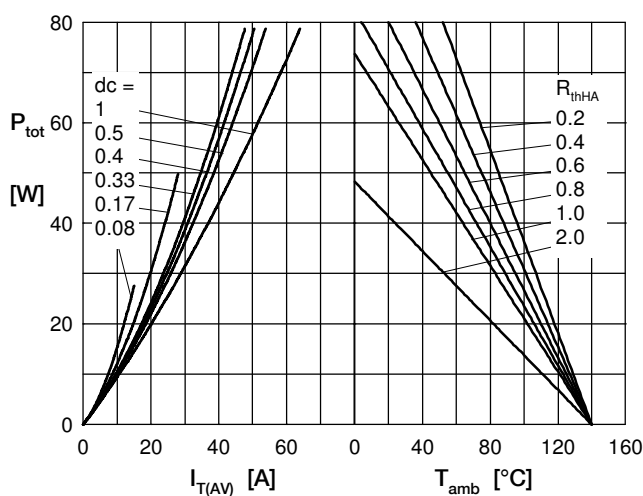


Fig. 7a Power dissipation versus direct output current
Fig. 7b and ambient temperature

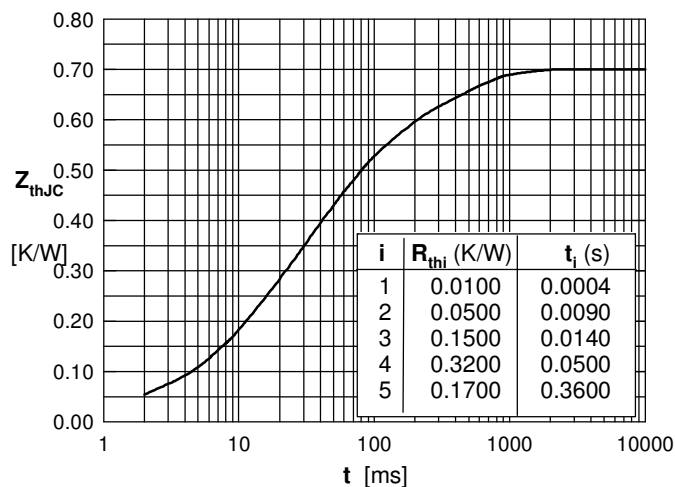


Fig. 8 Transient thermal impedance junction to case