


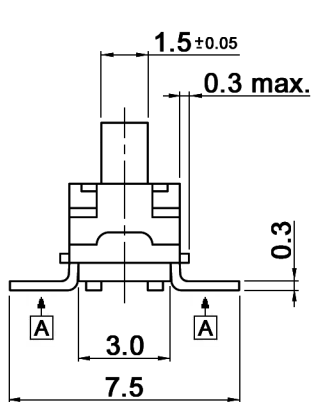


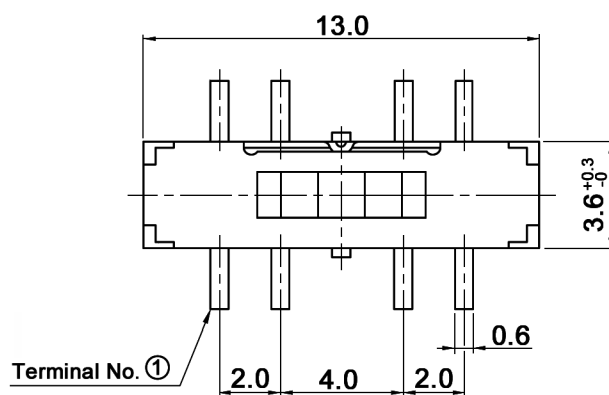


8x A common tolerances zone
 $\square \pm 0.05$

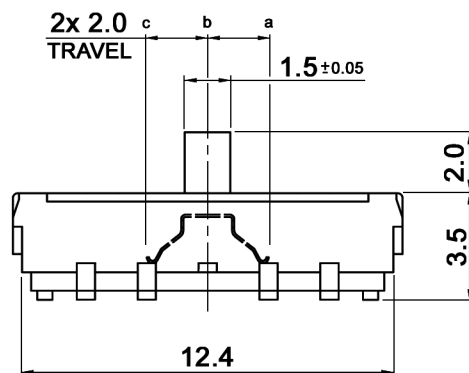

P.C. LAYOUT

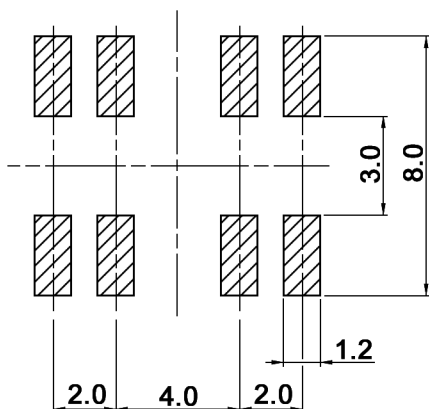

CIRCUIT DIAGRAM C: COMMON PIN



Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: $\pm 0.2\text{mm}$ above 10-50: $\pm 0.3\text{mm}$ above 50-100: $\pm 0.5\text{mm}$			Date	Name
			09/07	dr
Operating temperature	07/21	dr		
Slider material	06/21	dr		
Revised	01/21	dr		
Dimension	07/16	dr		
Common pin orientation	10/14	dr		
Material contact plate	07/14	dr		
Soldering conditions	07/11	dr		
Material	06/09	dr		
Slider position	06/08	dr		
Operating temperature	12/07	dr		
Modifications	Date	Name		

MMS 238 T

knitter-switch

30 12 36


Page

1/3

Specifications:

Contact rating: 0.3A, 6V DC
Contact resistance: 70mOhm max.
Insulation resistance: 100MOhm min. at 500V DC for 1 minute
Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
Operating temperature: -40°C to +85°C
Mechanical life: 5 000 cycles min.
Operating force: a-b c-b: 200 +/-100gf
b-a b-c: 300 +/-150gf
Material: Case: PPA, black
Contact plate: stainless steel, silver plated
Slider: PPA, black
Cover: SUS, washing
Terminal: brass strip, silver plated


Soldering conditions:

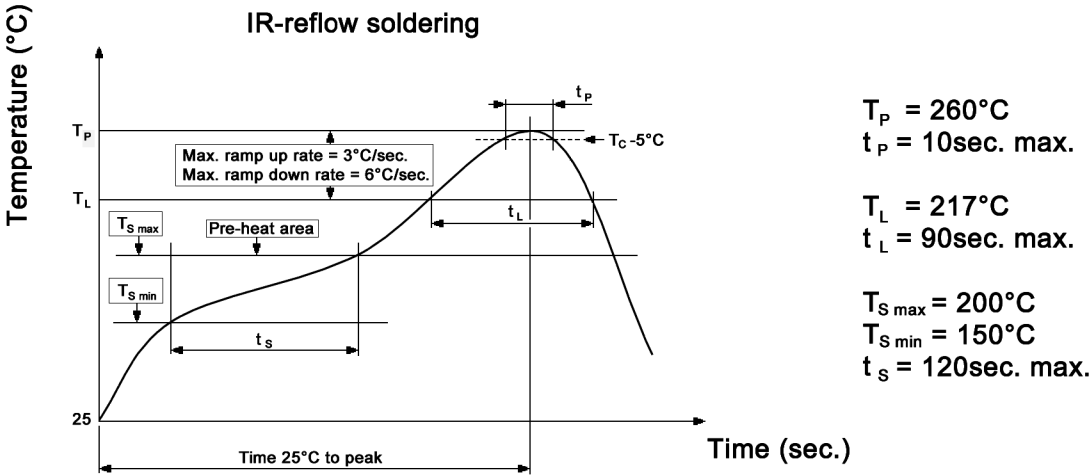

Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm above 50-100: ± 0.5mm			Date	Name	MMS 238 T			
			09/07	dr				
Operating temperature	07/21	dr						
Slider material	06/21	dr						
Revised	01/21	dr						
Dimension	07/16	dr						
Common pin orientation	10/14	dr						
Material contact plate	07/14	dr						
Soldering conditions	07/11	dr						
Material	06/09	dr	knitter-switch		30 12 36			Page
Slider position	06/08	dr						2/3
Operating temperature	12/07	dr						
Modifications	Date	Name						

Packaging:

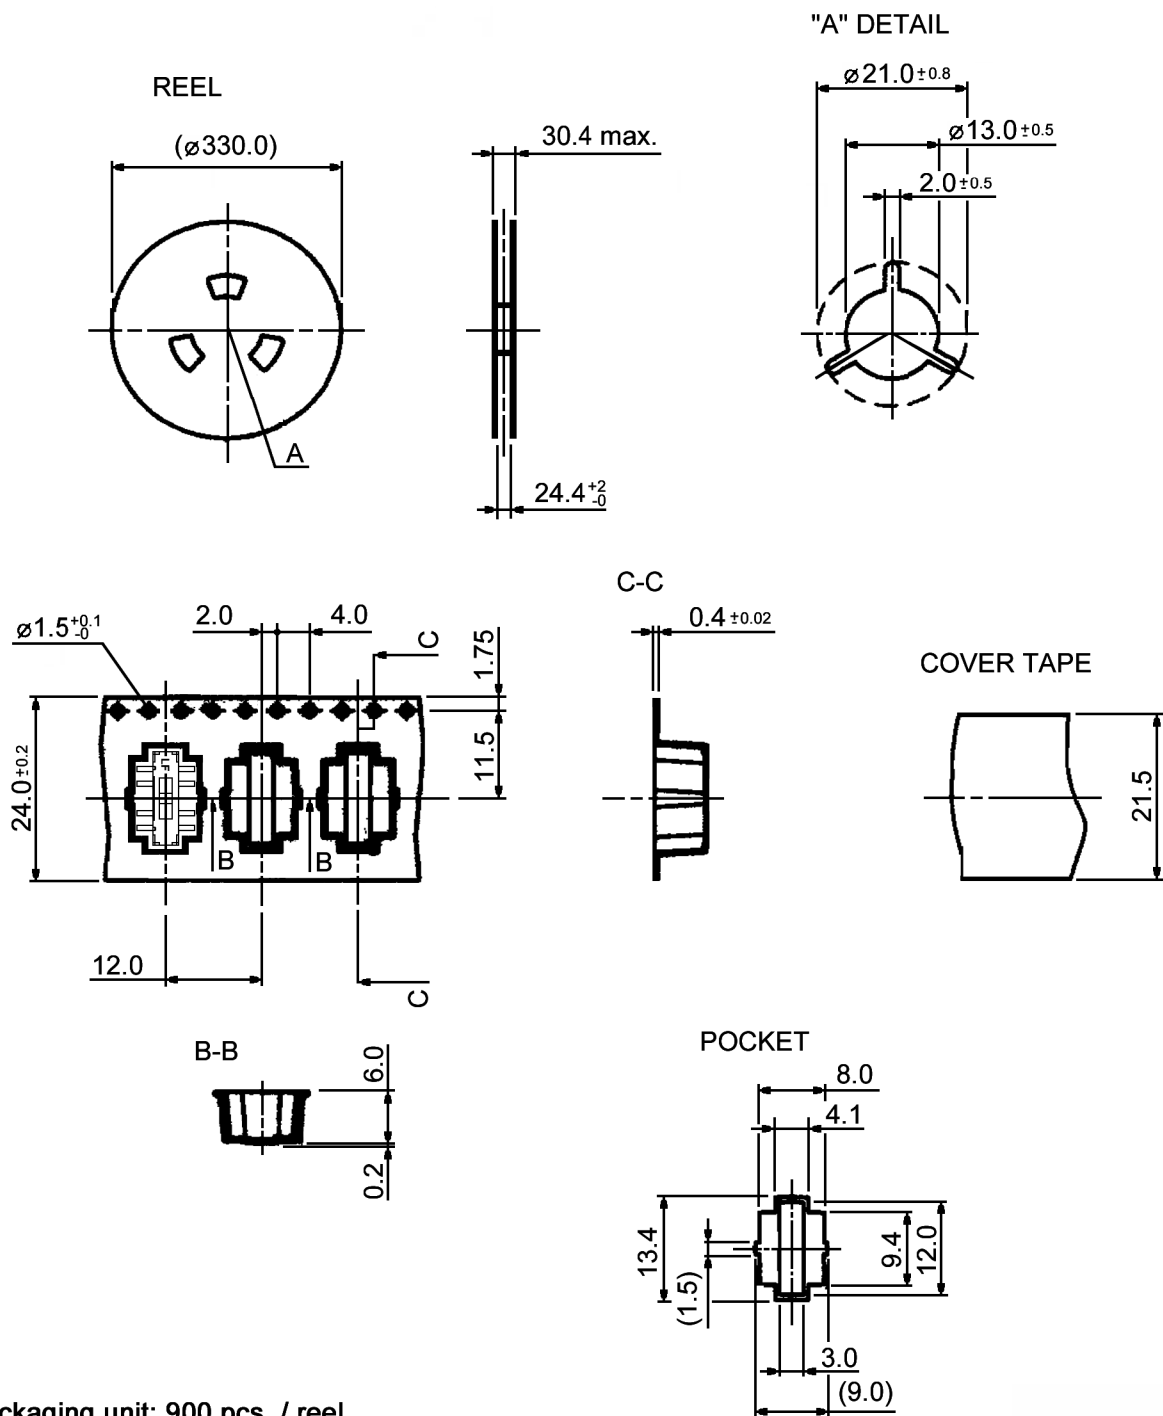

Packaging unit: 900 pcs. / reel
Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: $\pm 0.2\text{mm}$ above 10-50: $\pm 0.3\text{mm}$ above 50-100: $\pm 0.5\text{mm}$			Date	Name
			09/07	dr
Operating temperature	07/21	dr		
Slider material	06/21	dr		
Revised	01/21	dr		
Dimension	07/16	dr		
Common pin orientation	10/14	dr		
Material contact plate	07/14	dr		
Soldering conditions	07/11	dr		
Material	06/09	dr		
Slider position	06/08	dr		
Operating temperature	12/07	dr		
Modifications	Date	Name		

MMS 238 T

knitter-switch

30 12 36

Page

3/3