
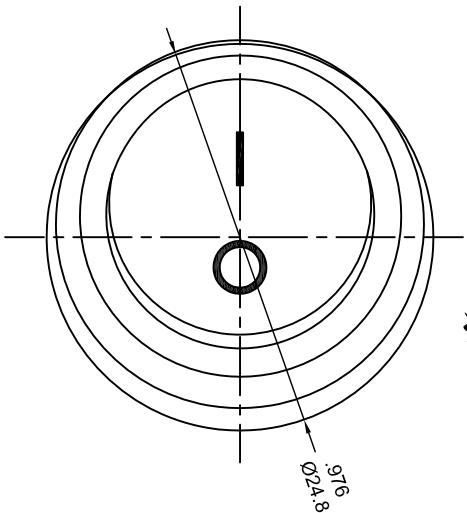
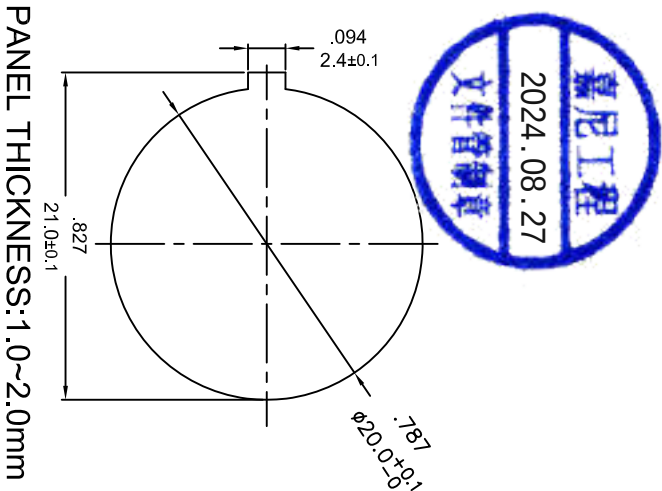
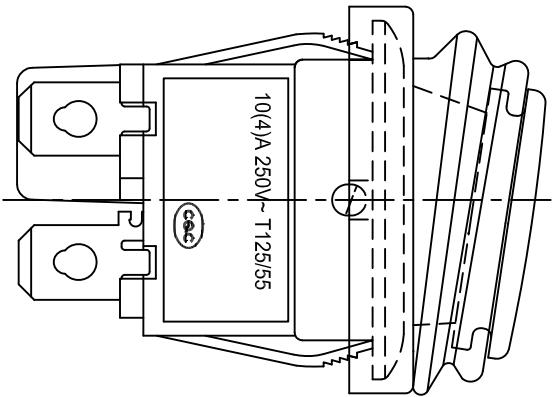
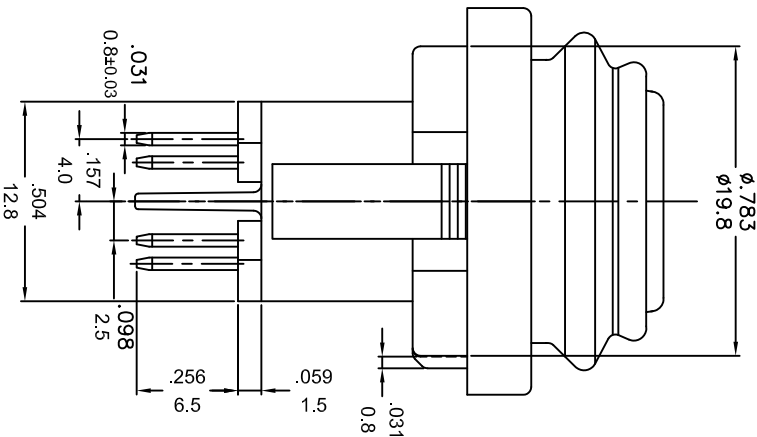


ROCKER SWITCH MODEL MR SERIES
RATING:12(4)A 125/250V~ (cURus/ENEC15)
10(4)A 250V~T125/55(CQC)
DIELECTRIC WITHSTAND VOLTAGE:1500VAC FOR 1 MINUTE
INSULATION RESISTANCE:DC 500V 100MΩ (MIN)
CONTACT RESISTANCE: 20mΩ INITIAL (MAX)
ILLUMINATED:200~250VAC

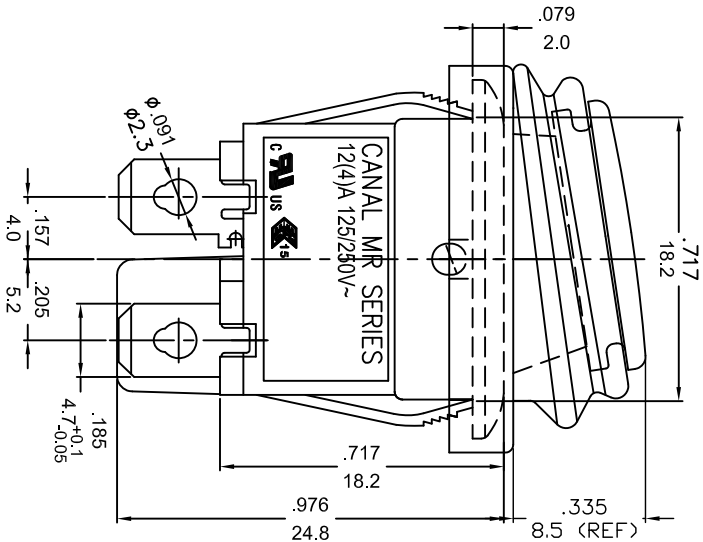

PANEL THICKNESS:1.0~2.0mm

NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED:±.012/0.3 (in/mm)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES		ANGLE 1/2°	SCALE	UNIT	PART NAME	MR SPEC DRAWING	DWG NO
△			DRAWN BY	周俊	DESIGNED BY	周俊	2/1			
△			CHECKED BY	周俊	APPROVED BY	周俊				
△	2024.08.27	首次出圖					2024.08.27	PART NO	MR-211R5W-GBRP-12GC	S9994A