

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
B	PROPOSAL DRAWING (EAR 14575)	MAY14/18	K.L.
C	UPDATING COMMON TERMINOLOGY	MAY18/18	A.G.

ORDERING CODE: M R D - A X 0 3 - M 1 5 - 0 0 0

SERIES _____

CONTACT SIZE & MECHANISM _____
A=1.0mm & LATCH LOCK

HOUSING ORIENTATION & CONTACT TYPE _____
J=FEMALE PLASTIC HOUSING & PIN CONTACTS
R=MALE PLASTIC HOUSING & SOCKET CONTACTS
H=FEMALE PLASTIC HOUSING & SOCKET CONTACTS
P=MALE PLASTIC HOUSING & PIN CONTACTS

NUMBER OF CONTACTS _____
03=THREE CONTACTS

SPECIALS
000=STANDARD


GROMMET SIZE OPTION
5=GROMMET FOR 3.0 (.118) TO 6.0 (.236) CABLE OD

CONTACT TERMINATION TYPE
M1=SOLDER CUP, FOR FIELD ASSEMBLY CABLE END


NOTES:

- MATERIAL: ALL MATERIALS ARE RoHS COMPLIANT PER EU DIRECTIVE 2011/65/EU
HOUSING: THERMOPLASTIC PBT, UL FLAMMABILITY RATING 94V-0, BLACK
CONTACTS: COPPER ALLOY PLATED WITH GOLD FLASH OVER NICKEL
GROMMET: SILICONE RUBBER
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A
OPERATING VOLTAGE: 125V AC MAXIMUM
DIELECTRIC WITHSTANDING VOLTAGE: 1500V DC
CONTACT RESISTANCE: 10.0mΩ MAXIMUM.
- RECOMMENDED CABLE OUTSIDE DIAMETER:
3.0 (.118) - 6.0 (.236).
- ENVIRONMENTAL PROTECTION: IP67 PER IEC 60529 IN THE MATED AND UNMATED CONDITION.


MALE WITH SOCKET CONTACTS




FEMALE WITH SOCKET CONTACTS



MALE WITH PIN CONTACTS



FEMALE WITH PIN CONTACTS



PART NUMBER TABLE:

CONNECTOR PART NUMBER	CONNECTOR TYPE	CONTACT TYPE	WIRE GAUGE FOR SOLDER CUP
MRD-AH03-M15-000	FEMALE	SOCKET	20-24 AWG
MRD-AR03-M15-000	MALE	SOCKET	18 AWG
MRD-AP03-M15-000	MALE	PIN	20-24 AWG
MRD-AJ03-M15-000	FEMALE	PIN	18 AWG

SEE SHEET 2 FOR
ADDITIONAL DRAWING
VIEWS



UNLESS SPECIFIED OTHERWISE	DRAWN K.XIONG	MAY09/18
PRIMARY UNITS MILLIMETERS	CHECKED K.LAMBIE	MAY15/18
SECONDARY INCHES	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APP'D A.GREEN	MAY15/18
1 DECIMAL PLACE ±0.25	ENG. REL. NO.	
2 DECIMAL PLACES ±0.15	REF. EAR 14575	
3 DECIMAL PLACES ±0.05	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
ANGULAR DEGREES		


Amphenol Canada Corp.
Commercial Products

MRD SERIES RUGGED CONNECTOR,
MALE OR FEMALE, 3 POSITIONS,
LATCH LOCK, CABLE FIELD ASSEMBLY,
IP67 RATING, RoHS COMPLIANT


DWG NO.	P-MRD-AX03-M15-000	REV C
CODE ID NO. 03554	DWG SIZE X	SCALE XX:1
SHEET 1	OF 2	

REVISONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
B	PROPOSAL DRAWING (EAR 14575)	MAY14/18	K.L.
C	UPDATING COMMON TERMINOLOGY	MAY18/18	A.G.


MALE WITH SOCKET CONTACTS

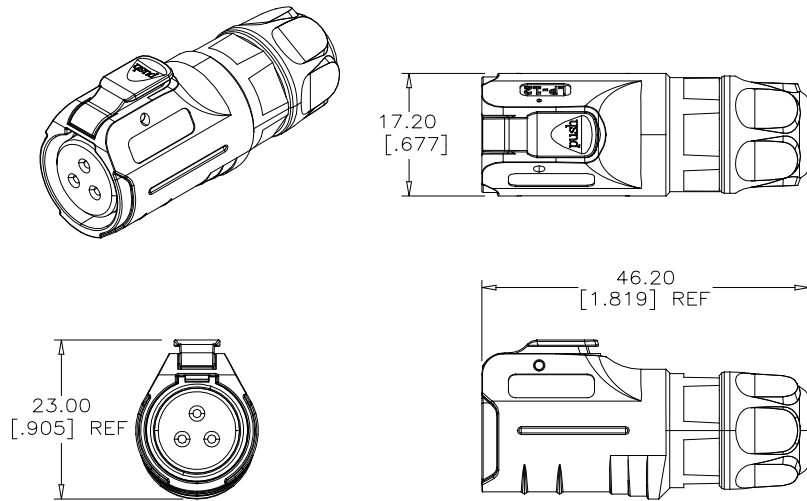


FEMALE WITH PIN CONTACTS

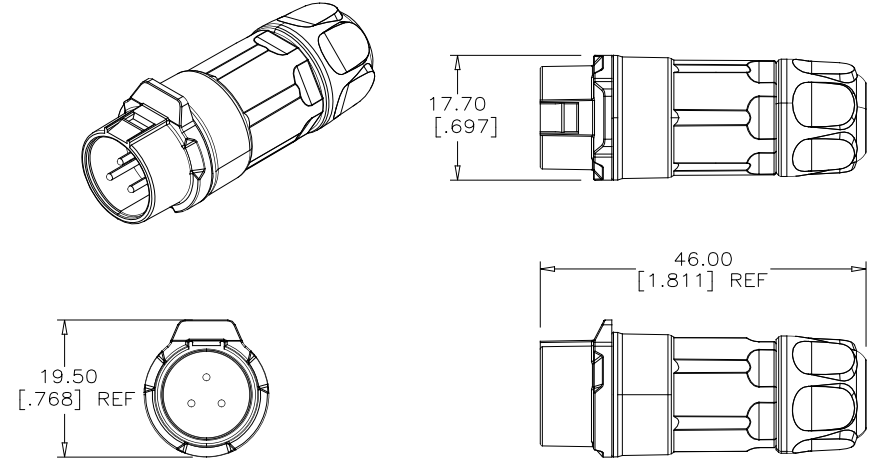

MALE WITH PIN CONTACTS

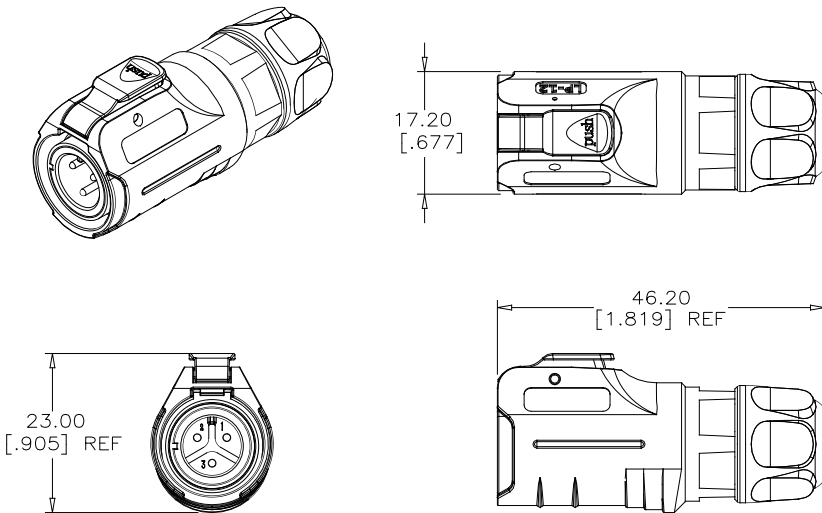

FEMALE WITH SOCKET CONTACTS

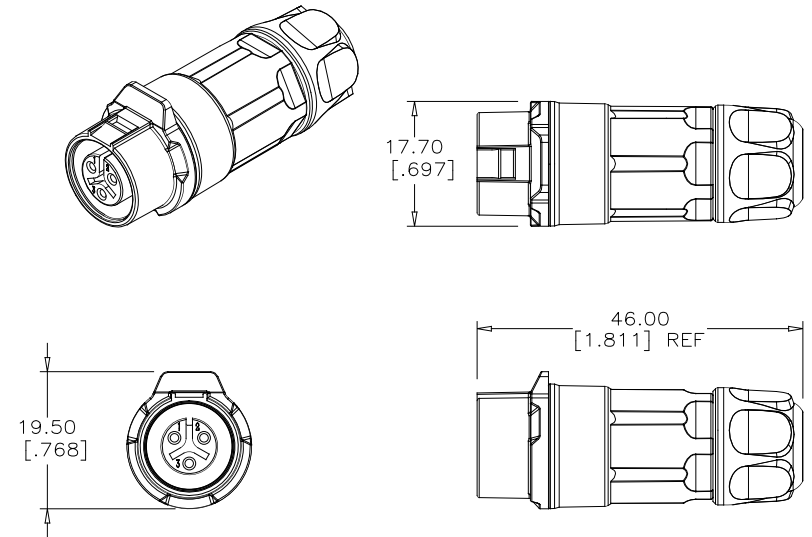

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN	K.XIONG	MAY09/18
PRIMARY UNITS MILLIMETERS	CHECKED	K.LAMBIE	MAY15/18
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D	A.GREEN	MAY15/18
1 DECIMAL PLACE ±0.25	ENG. REL. NO.		
2 DECIMAL PLACES ±0.15	REF. EAR 14575		
3 DECIMAL PLACES ±0.05	THIRD ANGLE PROJECTION		
ANGULAR DEGREES			

Amphenol Canada Corp. Commercial Products			
MRD SERIES RUGGED CONNECTOR, MALE OR FEMALE, 3 POSITIONS, LATCH LOCK, CABLE FIELD ASSEMBLY, IP67 RATING, RoHS COMPLIANT			
DWG NO.	P-MRD-AX03-M15-000		
CODE ID NO. 03554	DWG SIZE X	SCALE XX:1	SHEET 2 OF 2