



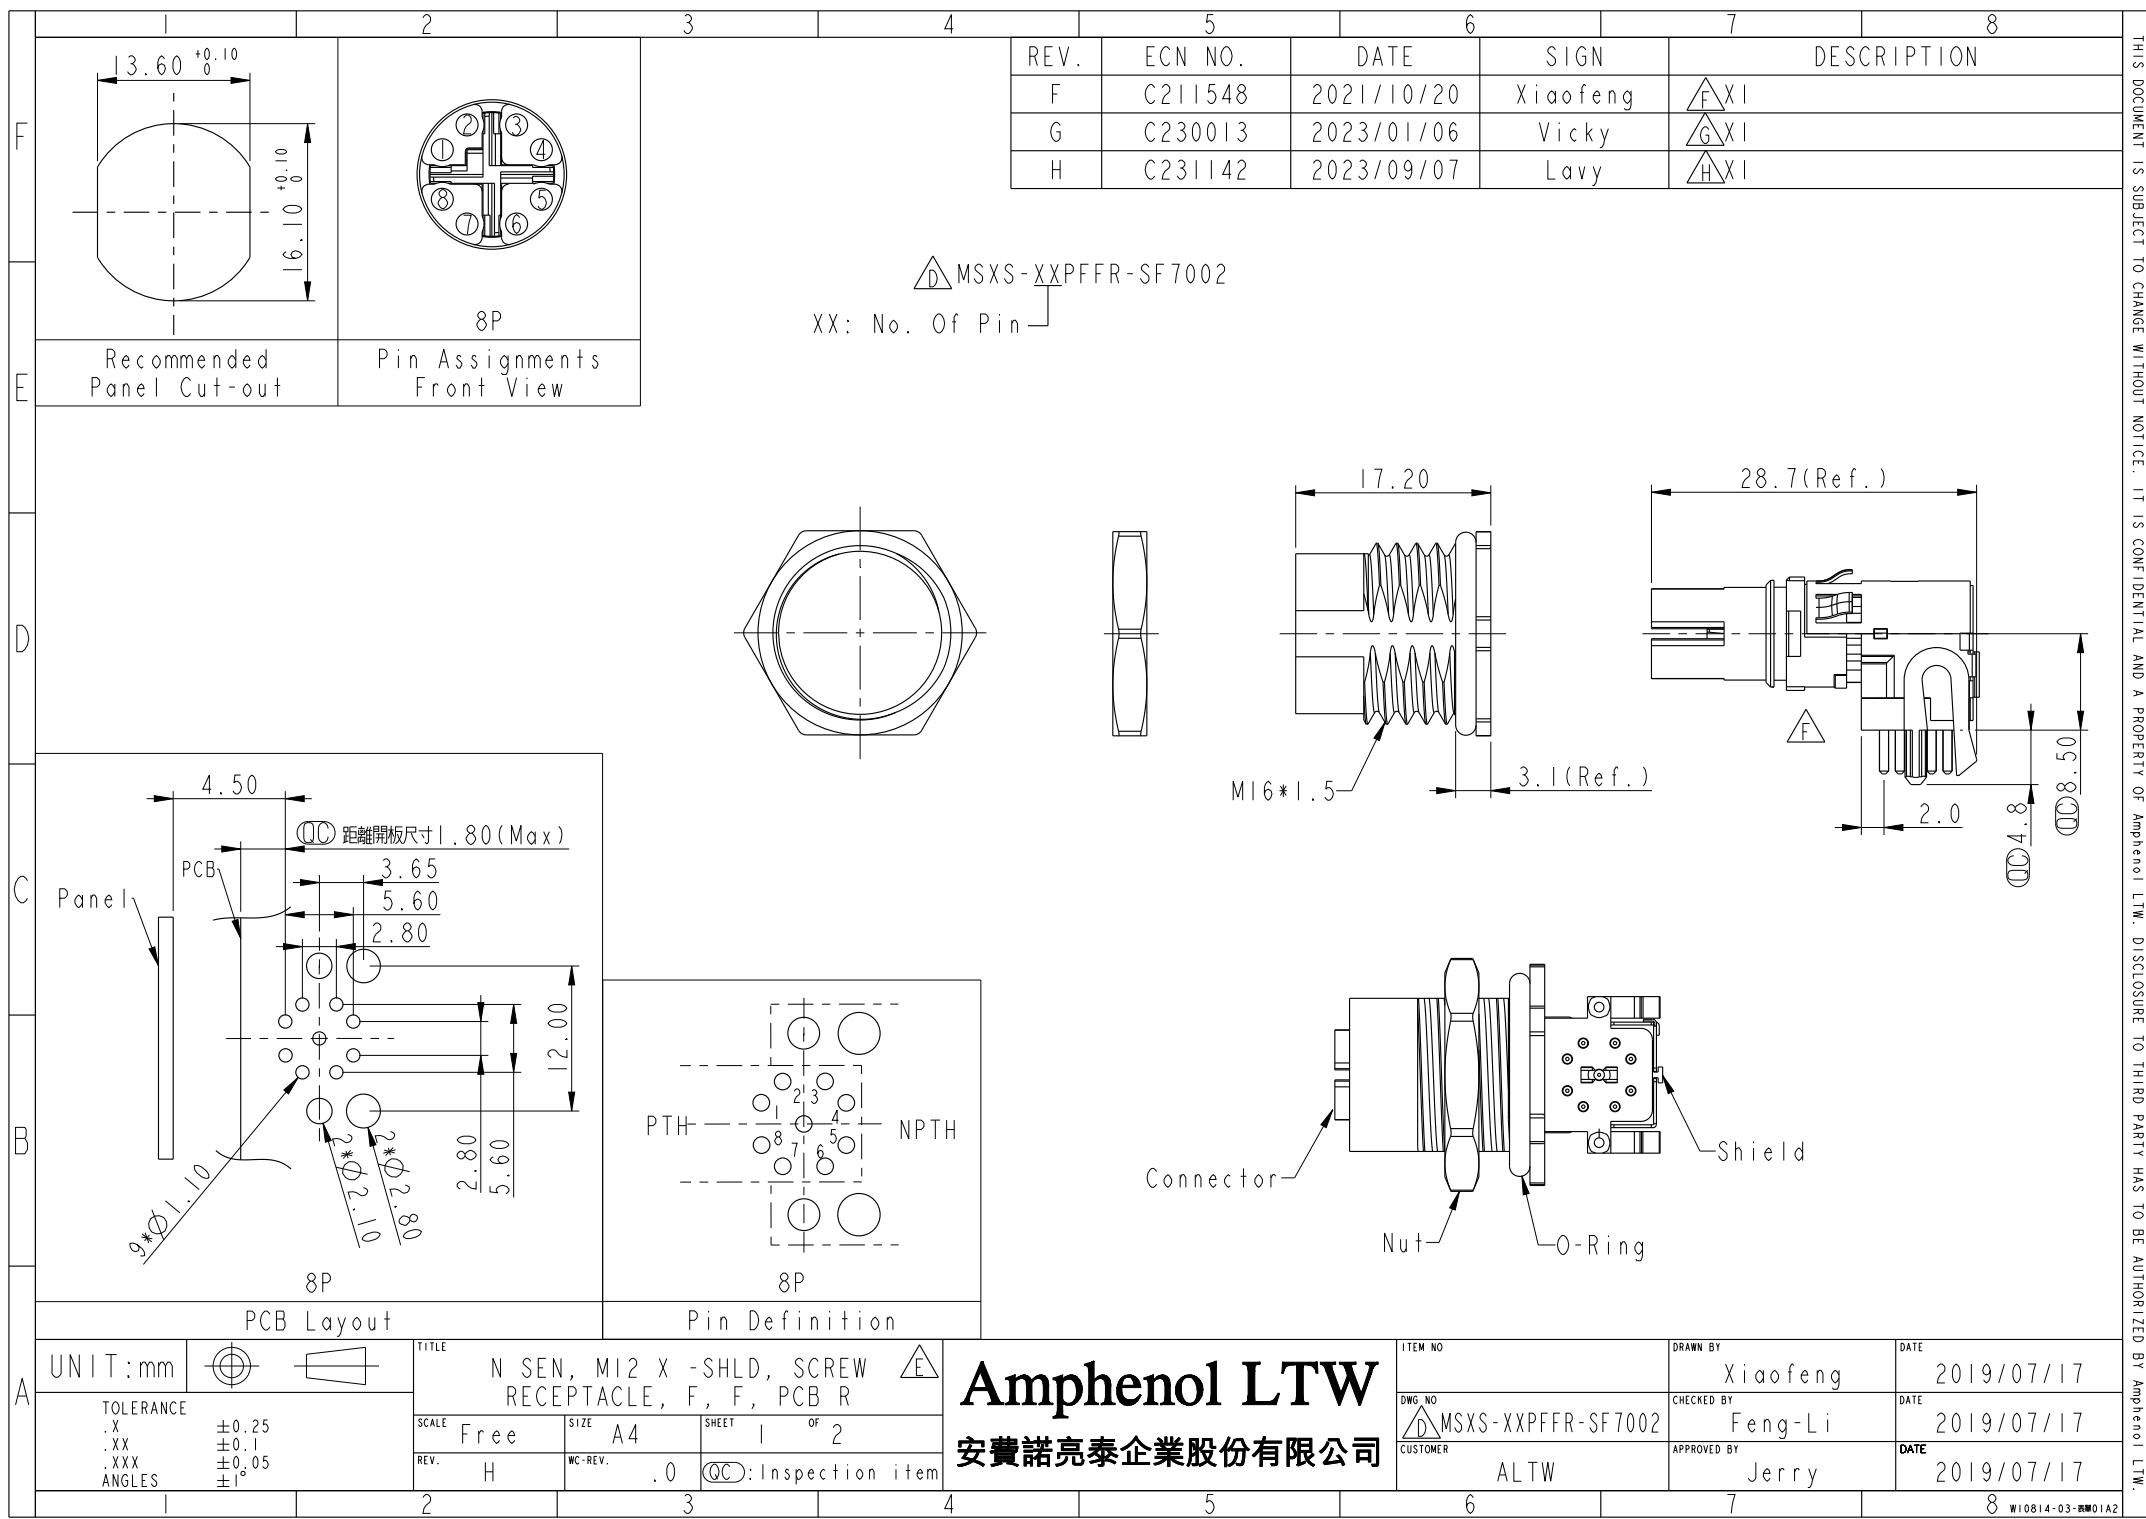

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Assembly:

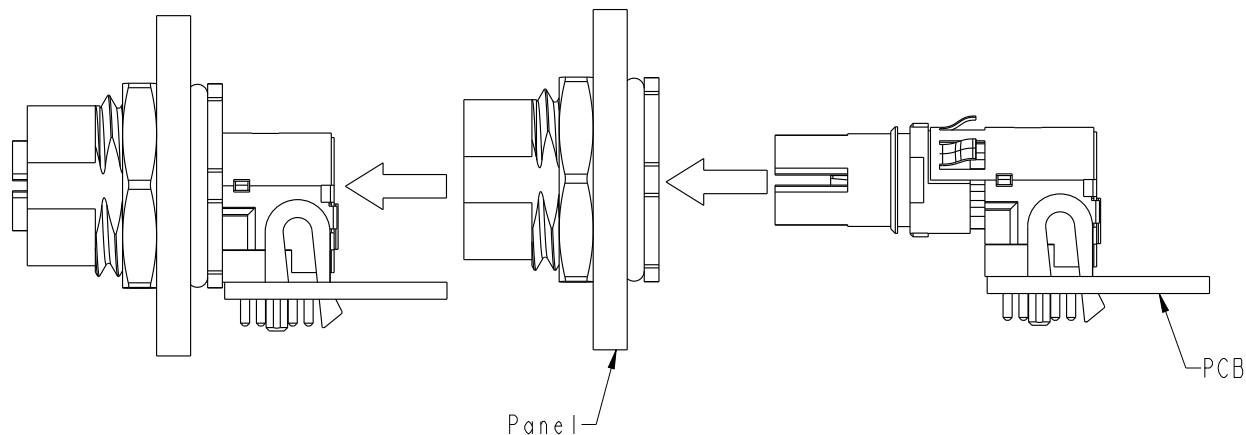

- Note:**
- * RoHS Compliant
 - * **QC** Important dimension
 - G** * Waterproof rate: IP67, mated Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Gasket: Rubber, Black
 - D** * Shield: Metal
 - D** * Nut: Metal
 - * O-Ring: Rubber, Black
 - H** * For panel thickness: 0.6~5.0mm
 - * For pcb thickness: 1.6~2.4mm
 - * Nut is packed separately in PE bag

UNIT:mm		TITLE	
TOLERANCE		N SEN, M12 X -SHLD, SCREW RECEPTACLE, F, F, PCB R	
.X	±0.25	SCALE	Free
.XX	±0.1	SIZE	A4
.XXX	±0.05	SHEET	2 OF 2
ANGLES	±1°	REV.	G
		WC-REV.	
		QC : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Xiaofeng	2019/07/17
DWG. NO	CHECKED BY	DATE
MSXS-XXPFFR-SF7002	Feng-Li	2019/07/17
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2019/07/17