



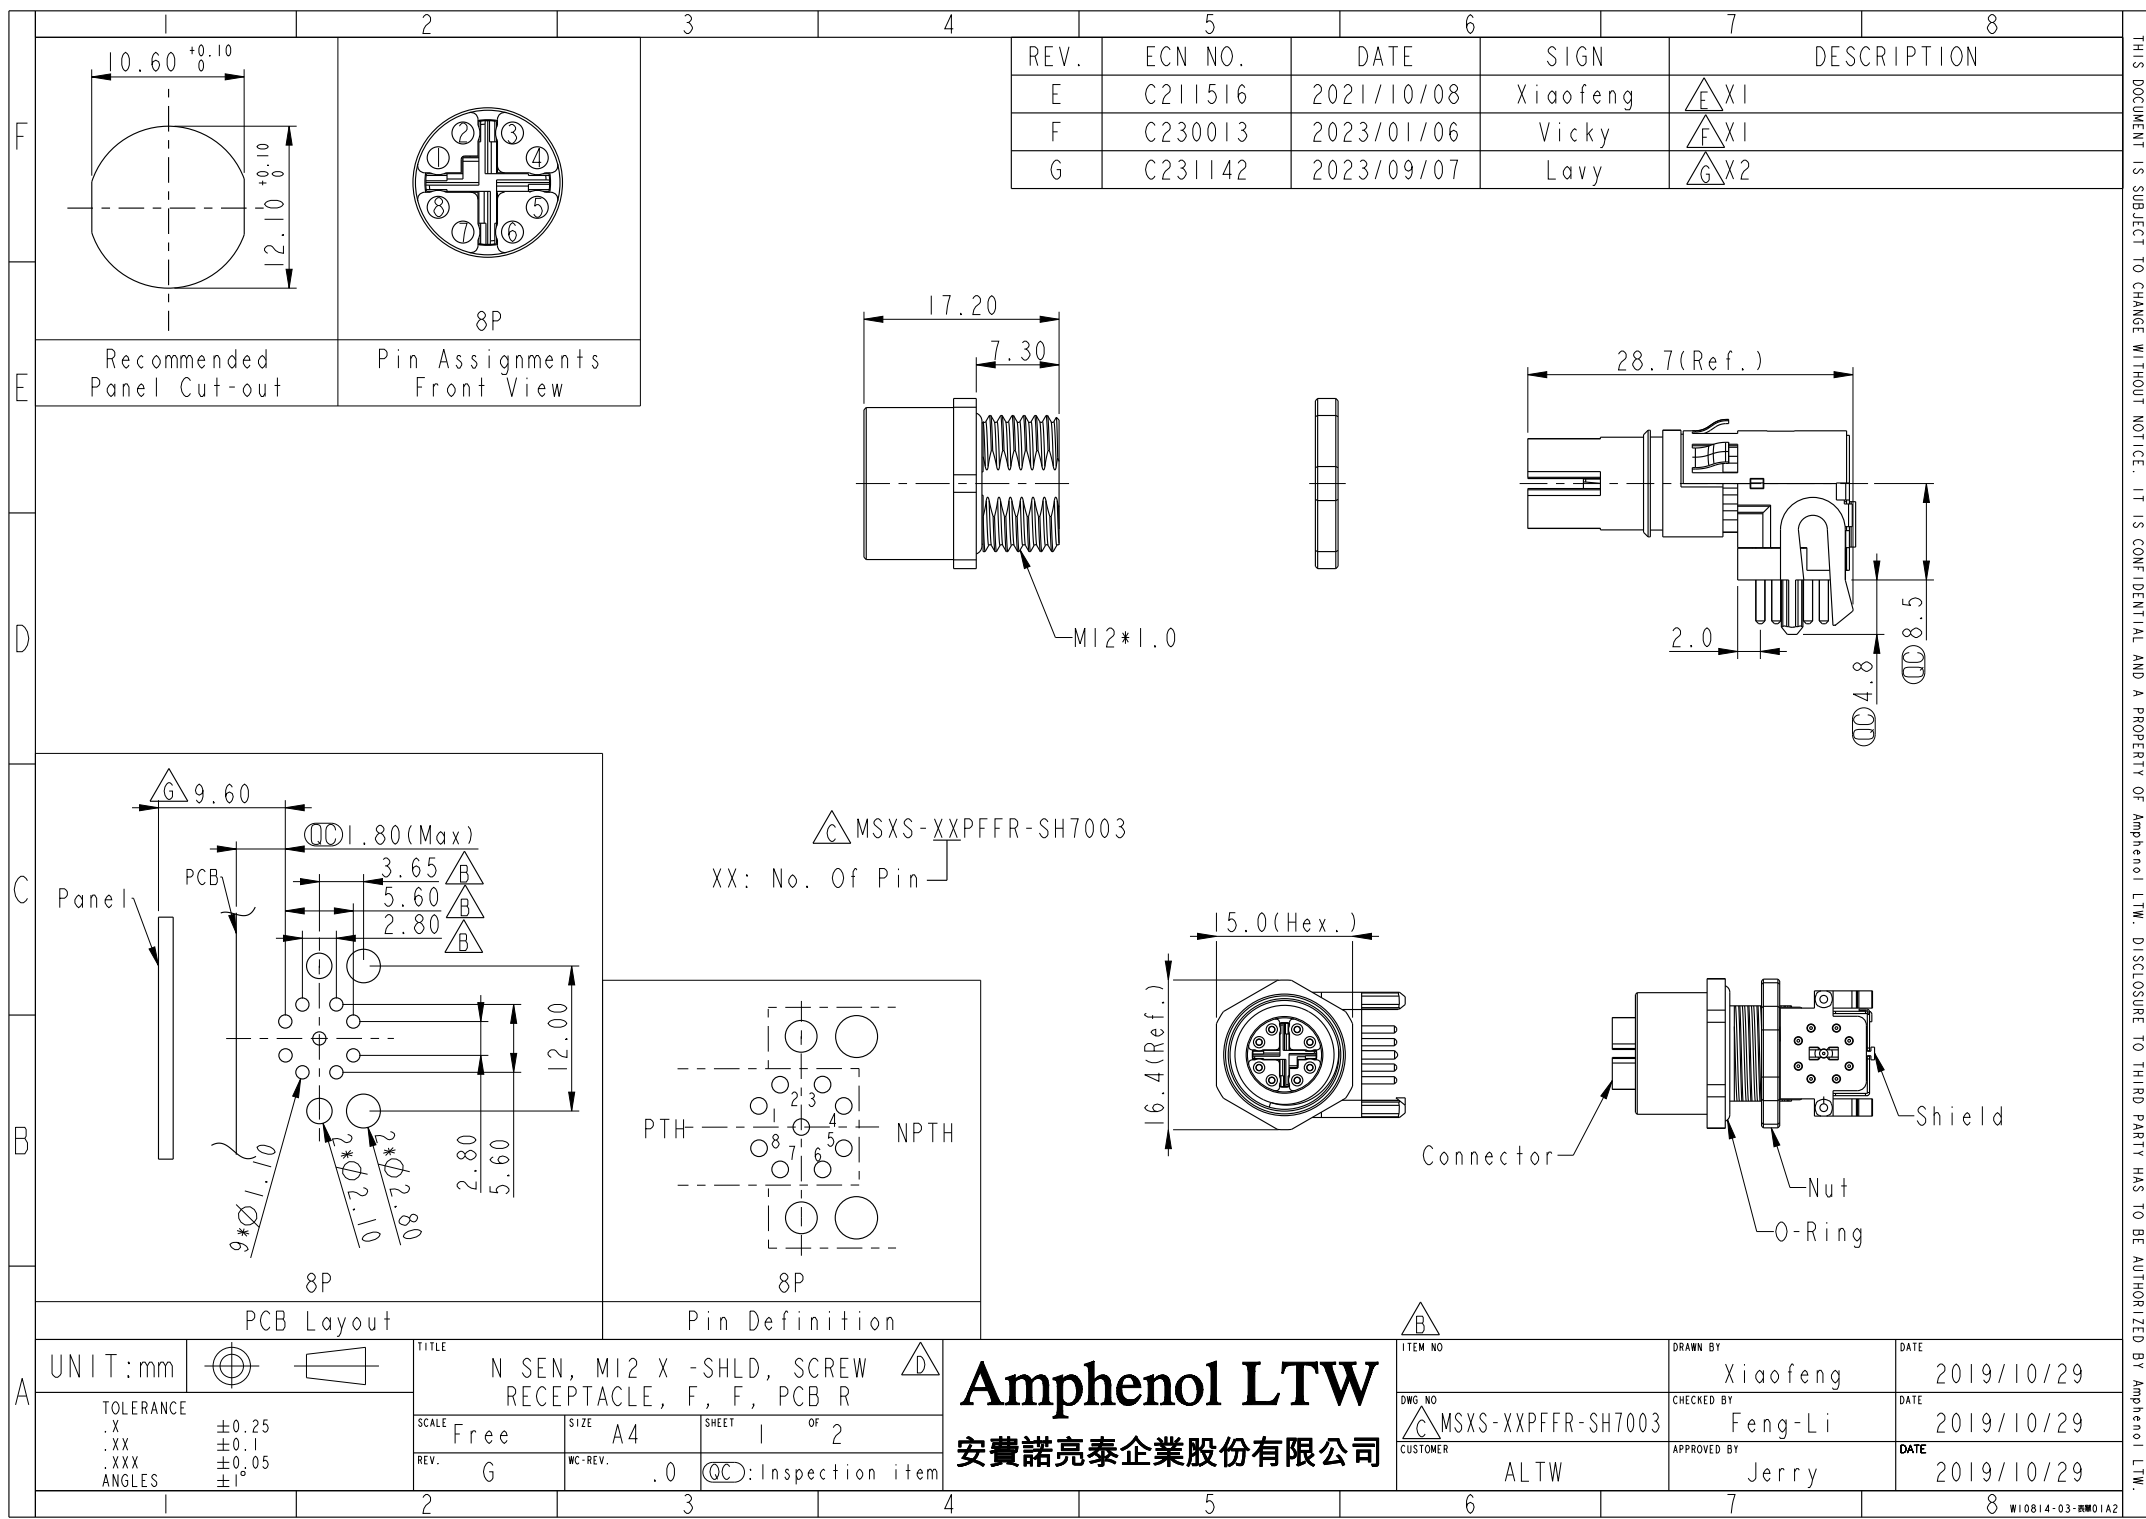

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Assembly:

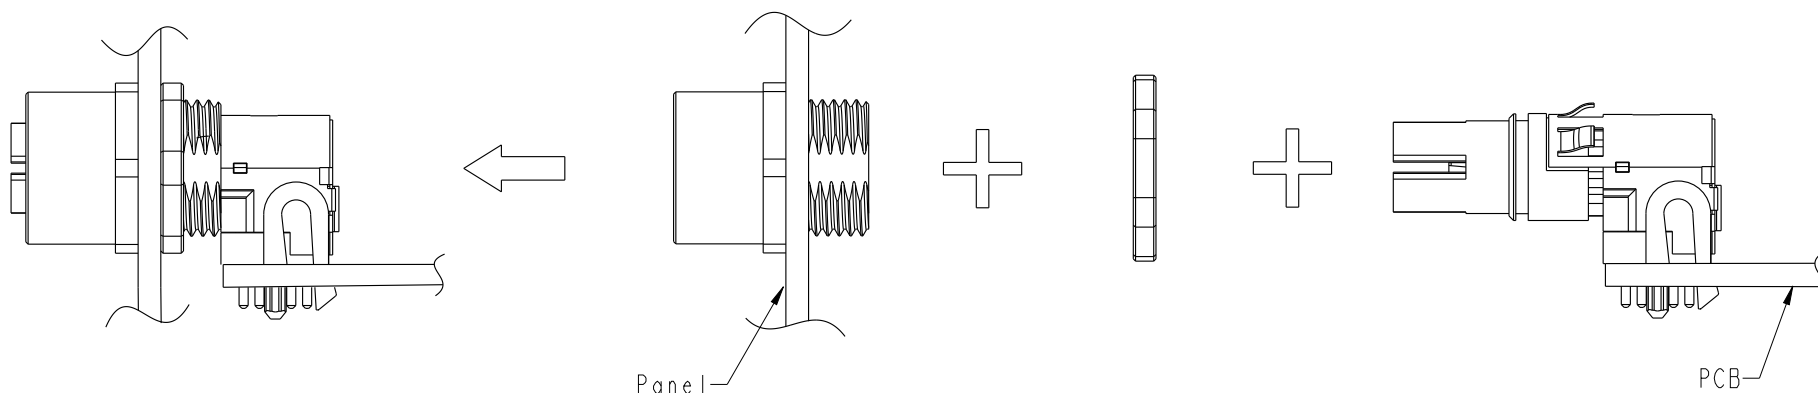

- Note:
- * RoHS Compliant
 - * Important dimension
 - * Waterproof rate: IP67, mated Connector
 - * Housing: Thermoplastic, Black
 - * Pin: Copper alloy, Gold plated
 - * Gasket: Rubber, Black
 - * Shield: Metal
 - * Nut: Metal
 - * O-Ring: Rubber, Gray
 - * For panel thickness: 1.0~3.0mm
 - * For pcb thickness: 1.6~2.4mm
 - * Nut is packed separately in PE bag

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE

N SEN, M12 X -SHLD, SCREW
RECEPTACLE, F, F, PCB R

SCALE
Free

SIZE
A4

SHEET
2 OF 2

REV.
G

WC-REV.

Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

B

ITEM NO

DWG NO

MSXS-XXPFFR-SH7003

CUSTOMER

ALTW

DRAWN BY

Xiaofeng

CHECKED BY

Feng-Li

APPROVED BY

Jerry

DATE

2019/10/29

DATE

2019/10/29

DATE

2019/10/29