


Technical data sheet

Aluminium empty housing Mx06-Mx15, powder-coated

Art.-Nr. 2011332

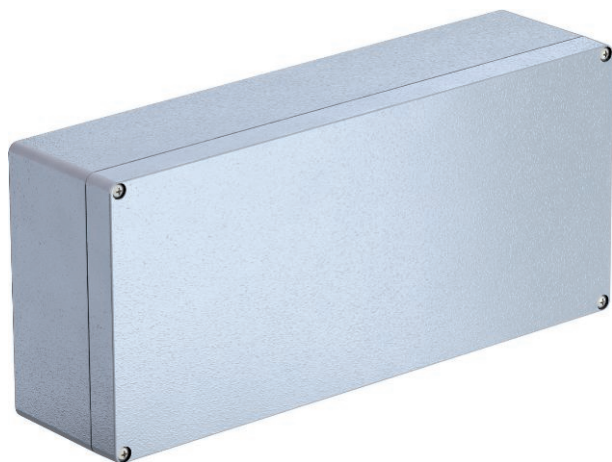

Robust aluminium empty housing for mechanical engineering and automation technology. The OBO Mx series' excellent mechanical and thermal features make it most suitable for extreme demands in many different areas. It is therefore also best suited for applications in industry, ports and shipbuilding, as well as in the agricultural sector.

The products protect the electrical installation against high-grade strains. They withstand both extreme cold and heat as well as vandalism and impact on roads, railways or in tunnels. With an IP66 protection class, they are optimally protected against the intrusion of dust and water. The aluminium housings are plastic coated (RAL 7035) and are delivered with a cover including stainless steel screws, a seal and two or four earthing screws.



AIG Die-cast aluminium
P Powder-coated

Additional product text 1 | Temperature: -40°C to +125°C

Master data

Item no.	2011332
Type	Mx 361609 SGR
Description 1	Aluminium empty housing
Dimension	360x160x91
Colour	Silver grey
RAL number	7001
Material	Die-cast aluminium
Material symbol	AIG
Surface	Powder-coated
Surface symbol	P
Smallest sales unit	1,00 Piece
Weight	320,00 kg/100 pc.

Technical data sheet

Aluminium empty housing Mx06-Mx15, powder-coated

Art.-Nr. 2011332



Technical data

	Length	360,00 mm
	Width	160,00 mm
	Height	91,00 mm
	Clear internal dimensions	317.5x149x92 mm
	Dimension	360x160x90 mm
	Dimension LxWxH	360x160x91 mm
	Extension option	☒
	Version	Closed with 4 stainless steel lid screws
	Lid version	Closed
	Cover fastening	Screwed
	Shape	Rectangular
	Suitable for outdoor use	☒
	Suitable for lightning protection	☐
	with lid	Yes
	With cover	☒
	With mounting plate	☐
	Installation type	Wall/ceiling mounting
	Protection rating	IP66
	Protection rating	IP 66
	max. permitted ambient temperature	-40,00 - 125,00 °C
	Weatherproof	☒