

# Technical data sheet

## Cone cable gland, PG thread, strain relief, nickel-plated

Item no. 2046121



Cable gland with centrally acting transverse clip strain relief in the pressure screw, bend protection of movable cables through strongly rounded pressure screw.

With Pg connection thread to DIN 40430.

Pressure rings made of electrogalvanised and transparently passivated steel.

NR/SBR sealing ring.

Protection rating: with connection thread sealing ring IP 65, without connection thread sealing ring IP 54.

With hexagonal intermediate support (similar to shape C 4 to DIN 46320).

\* Prices according to DEL notation.



|      |               |
|------|---------------|
| CuZn | Brass         |
| N    | Nickel-plated |

### Master data

|                          |                        |
|--------------------------|------------------------|
| Item no.                 | 2046121                |
| Type                     | 159 MS PG13.5          |
| Description 1            | Cable gland            |
| Description 2            | with outside hexagonal |
| Dimension                | PG13,5                 |
| Material                 | Brass                  |
| Material symbol          | CuZn                   |
| Surface                  | Nickel-plated          |
| Surface symbol           | N                      |
| Smallest sales unit (VG) | 50,00 Piece            |
| Weight                   | 3,83 kg/100 pc.        |


# Technical data sheet

Cone cable gland, PG thread, strain relief, nickel-plated

Item no. 2046121



## Technical data

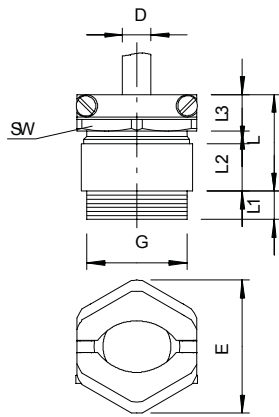

|                                |                                     |
|--------------------------------|-------------------------------------|
| Dimension E                    | 27,00 mm                            |
| Dimension L max.               | 26,00 mm                            |
| Dimension L1                   | 6,50 mm                             |
| Dimension L2                   | 12,50 mm                            |
| Dimension L3                   | 11,30 mm                            |
| SW 1                           | 22,00 mm                            |
| SW 2                           | 24,00 mm                            |
| Type of seal                   | Sealing ring                        |
| Bend protection                | <input type="checkbox"/>            |
| Sealing range D                | 8,00 - 10,00 mm                     |
| explosion-proof                | <input type="checkbox"/>            |
| Flat cable threaded connection | <input type="checkbox"/>            |
| For Ex zone                    | Without                             |
| Thread                         | Pg 13,5                             |
| Thread type                    | PG                                  |
| Thread length                  | 6,50 mm                             |
| Fibre-glass reinforced         | <input type="checkbox"/>            |
| Halogen-free                   | <input type="checkbox"/>            |
| Multiple sealing insert        | <input type="checkbox"/>            |
| With locknut                   | <input type="checkbox"/>            |
| Impact-resistant               | <input type="checkbox"/>            |
| Protection rating              | IP65                                |
| Strain relief option           | <input checked="" type="checkbox"/> |