

Technical data sheet

Impact tie, version with collar

Item no. 3492023



Impact tie for single fastening of non-load-bearing systems in non-cracked concrete as well as for multiple fastening in cracked and non-cracked concrete.
Tested to fire protection standards, fire resistance class R 120 according to European Technical Approval ETA-02/0020 (option 7) and European Technical Approval ETA-05/0116.
Mounting with marking and setting tool.



St	Steel
G	Electrogalvanised

Master data

Item no.	3492023
Type	ES M 8x30
Description 1	Drop-in anchor ES
Dimension	8x30
Material	Steel
Material symbol	St
Surface	Electrogalvanised
Surface to DIN	DIN EN 12329
Surface symbol	G
Smallest sales unit (VG)	100,00 Piece
Weight	1,10 kg/100 pc.


Technical data sheet

Impact tie, version with collar

Item no. 3492023



Technical data

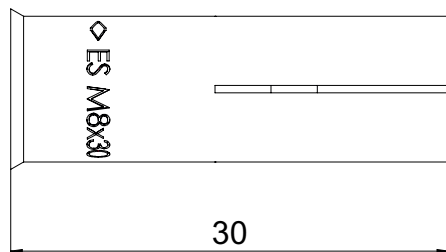

Length	30,00 mm
Dimension L	30,00 mm
Dimension	8x30 mm
Version	Lightning strike
Fastening unit	Other
Drill hole depth	30,00 mm
Drill hole diameter	10,00 mm
Screw-in depth min.-max.	9,00 - 13,00 mm
Thread	M8
Thread metric	8,00
Self-drilling	☐
Permitted load range, tension zone	1,70 kN
Approvals available	☒