


■Features

- High Luminous LEDs
- 5mm Flat Top Standard Directivity
- UV Resistant Epoxy
- Color Diffused Type

■Photo

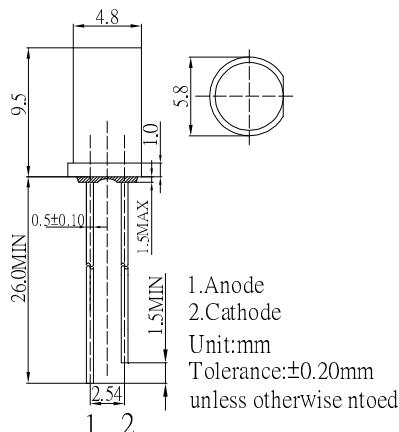

■Outline Dimension

■Applications


- Electronic Signs And Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		W/BL/PG	Y/O/R	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current#	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	102	78	mW
Operating Temperature	T _{opr}	-30 ~ +85		°C
Storage Temperature	T _{stg}	-40~ +100		°C
Lead Soldering Temperature	T _{sol}	260°C/5sec		-

■Directivity

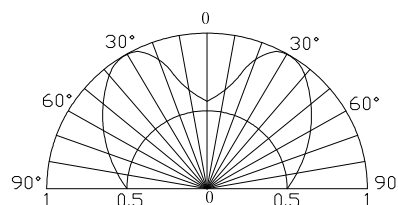

#Pulse width Max.10ms Duty ratio max 1/10

■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color			V _F (V)			I _R (μA)	I _v (mcd)			CCT(K)/Wd(nm)*			2θ1/2(deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I _F =20mA			V _R =5V	I _F =20mA			I _F =20mA			
OSW5DK5TK2A	White	W		2.7	2.9	3.4	10	750	1120	-	8500-18000K(X:0.27, Y:0.28)			180
OSB5SA5TK4A	Blue	BL	■	2.7	2.9	3.4	10	220	330	-	465	470	475	180
OSG5DA5TK4A	Pure Green	PG	■	2.7	2.9	3.4	10	500	750	-	520	525	530	180
OS5YEA5TK4A	Yellow	Y	■	1.8	2.1	2.6	10	500	750	-	585	590	595	180
OS5OEA5TK4A	Orange	O	■	1.8	2.1	2.6	10	500	750	-	600	605	610	180
OS5REA5TK4A	Red	R	■	1.8	2.1	2.6	10	500	750	-	620	625	630	180

*1 Tolerance of measurements of chromaticity coordinate is ±10%

*2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V