





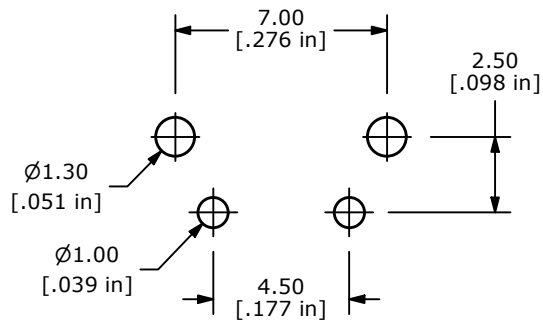


P.C.B. LAYOUT



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25 1.00
[.039 in]
3. TERM. NOS. FOR REFERENCE ONLY. 2.50
[.098 in]
4. RATING: 50mA @12VDC
- ▲ 5. OPERATING FORCE: 160 ± 50 gf
6. TRAVEL: 0.3mm ± 0.15 mm
7. CONTACT RESISTANCE: 100 m Ω MAX.
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲ 9. CONTACT MATERIAL: SILVER
10. ▲ DENOTES CRITICAL PARAMETER
11. OPERATING TEMP: -40°C to 85°C

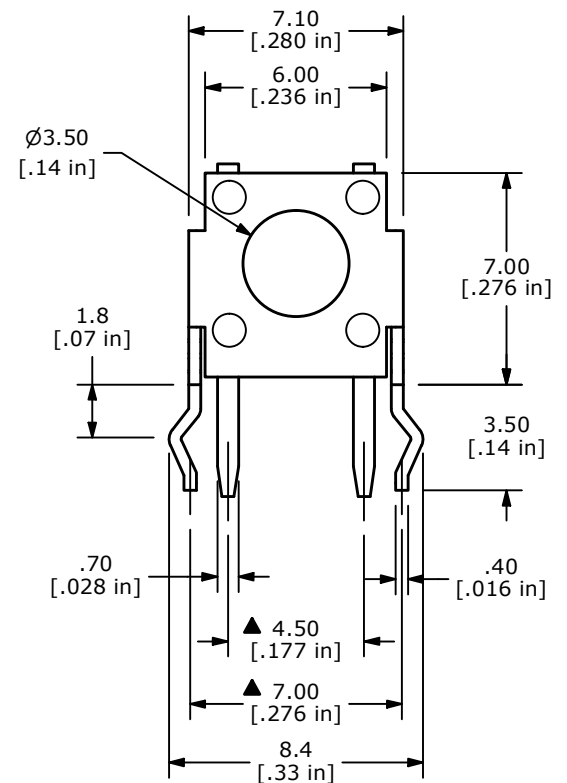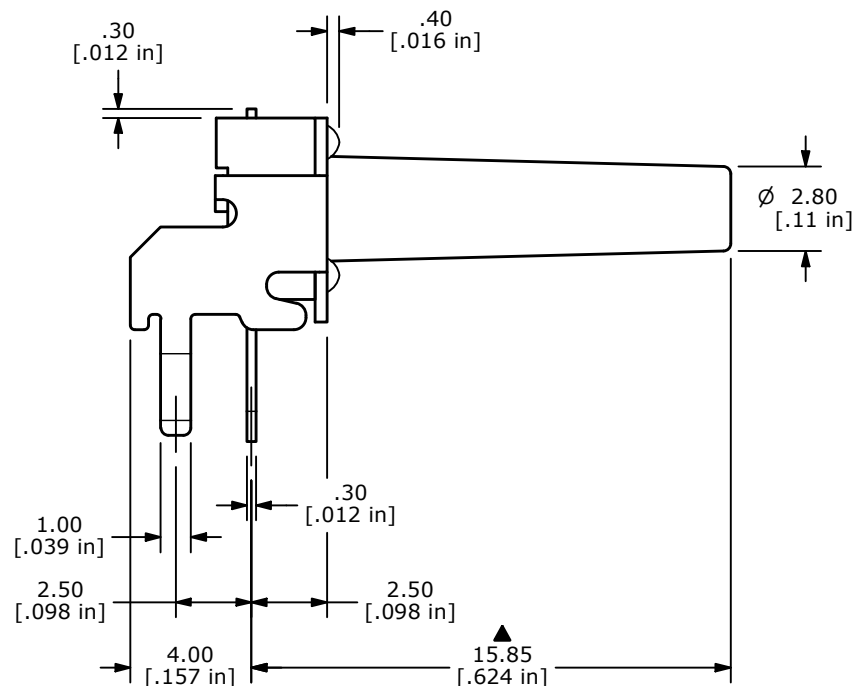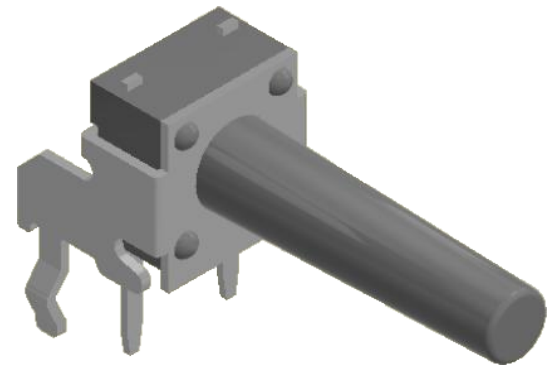

F	24548	REMOVE STEP IN HOUSING, CHANGE TEMP	10/19/20	JM	 E-SWITCH®				
E	24115	operating temp: -40C to +85C	12/3/19	MW					
D	21504	REDRAW IN 3D, CHANGE BRACKET	7/8/14	EBP	TITLE TL1105QF160Q				
REV	PCR NO	DESCRIPTION	DATE	BY					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 4:1	DATE 7/8/2014	DR EBP	DWG P010022	REV F