
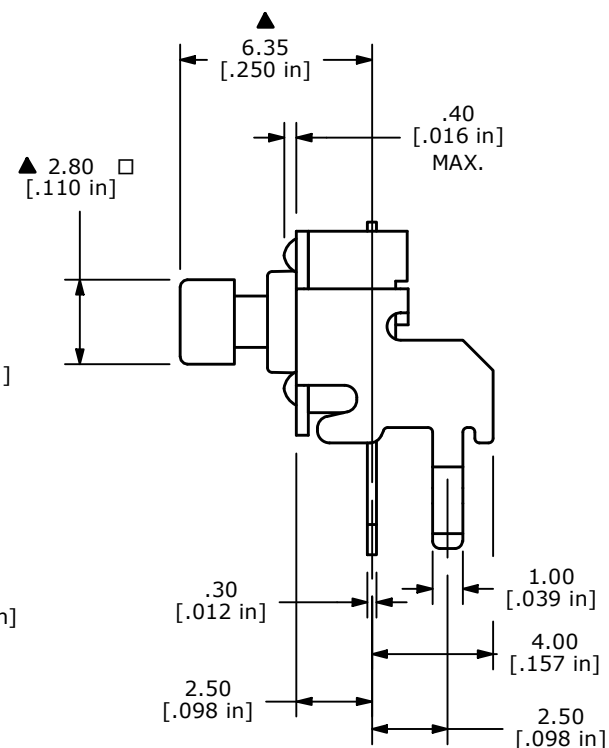
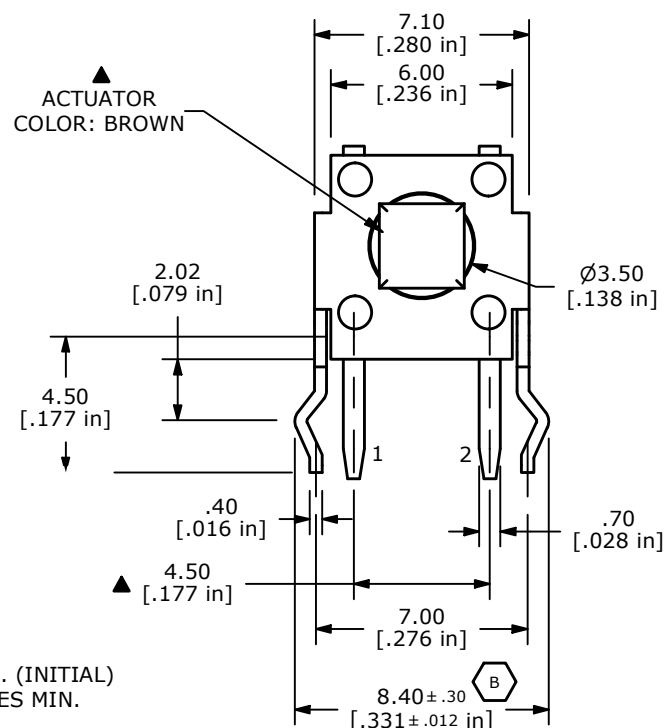

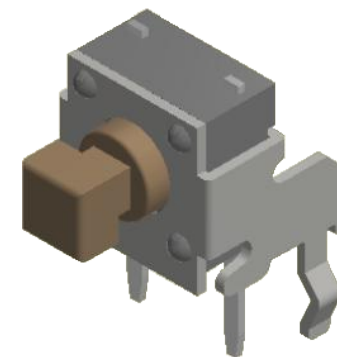
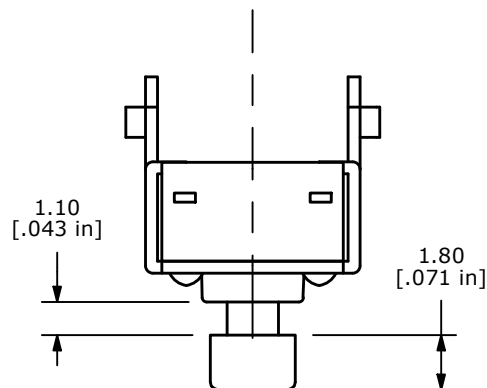


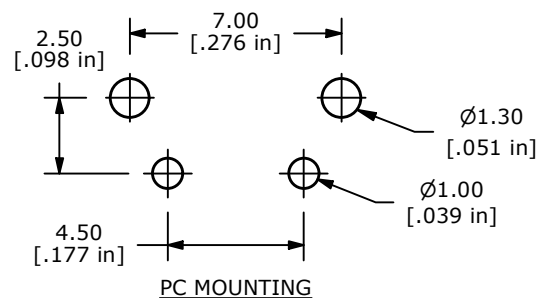

## NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲5. OPERATING FORCE: 100±50 gf
6. TRAVEL: 0.25 +0.2/-0.1 mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲9. CONTACT MATERIAL: SILVER
10. ▲ DENOTES CRITICAL PARAMETER
12. OPERATING TEMP: -40°C TO 85°C

|     |        |                                     |          |     |
|-----|--------|-------------------------------------|----------|-----|
| C   | 24548  | REMOVE STEP IN HOUSING, CHANGE TEMP | 10/19/20 | JM  |
| B   | 18742  | LEG TOLERANCE WAS +/- 0.1           | 1/11/10  | BLR |
| A   | 12357  | ADD NOTCH                           | 9/23/02  | CB  |
| REV | PCR NO | DESCRIPTION                         | DATE     | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

TITLE TL1105JAF100Q

SCALE  
4:1DATE  
1/11/2010DR  
BLRDWG  
P010209REV  
C