
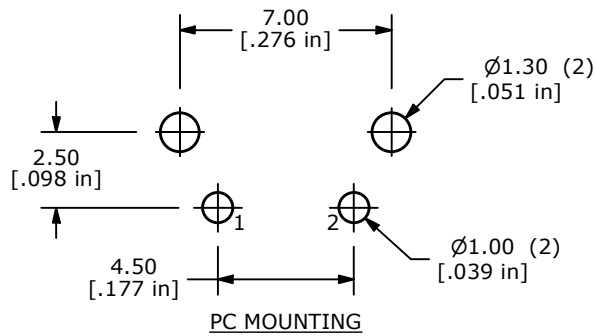
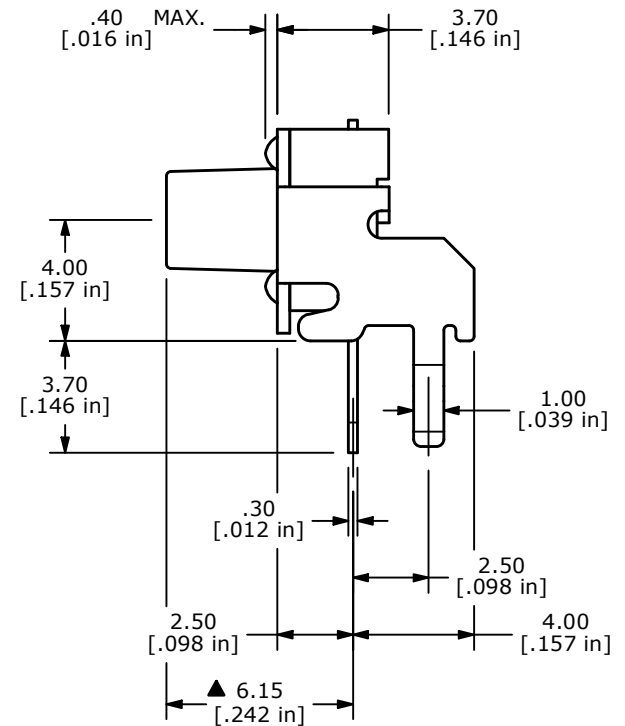
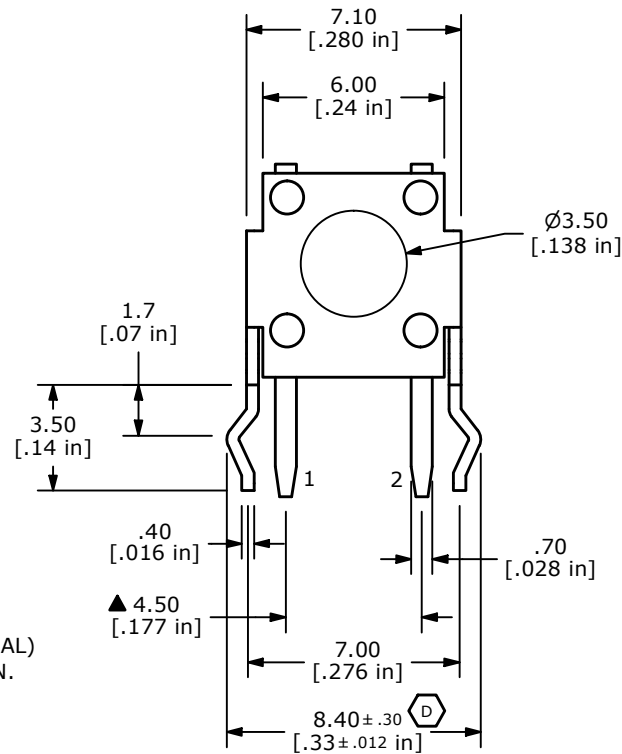
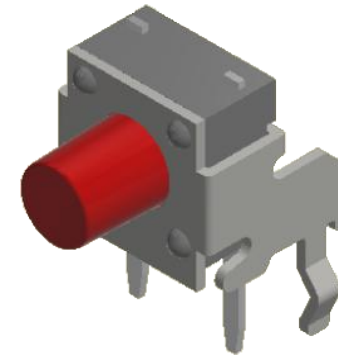


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 250 $\pm$ 50 gf
6. TRAVEL: 0.25 +0.2/-0.1 mm
7. CONTACT RESISTANCE: 50 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲ 9. CONTACT MATERIAL: SILVER
10. ▲ DENOTES CRITICAL PARAMETER
11. OPERATING TEMP: -40°C TO 85°C

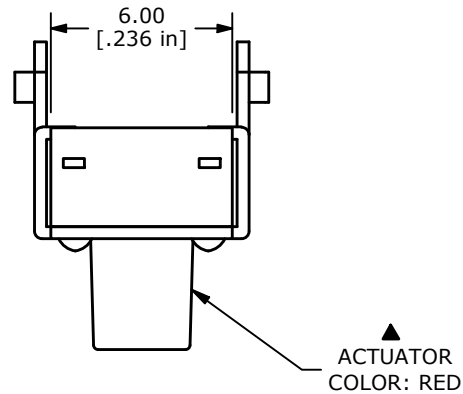

E	24551	REMOVE STEP IN HOUSING, CHANGE TEMP	10/29/20	JM
D	19502	ADD TOLERANCE	12/08/10	BGL
C	14400	REMOVE TOL. & ADD To 7.00 DIM	10/13/04	AR
B	12370	REVISED AND REDRAWN	12/10/02	CJB
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

TITLE TL1105RF250Q

SCALE
4:1DATE
5/11/2002DR
RJCDWG
P021222REV
E