
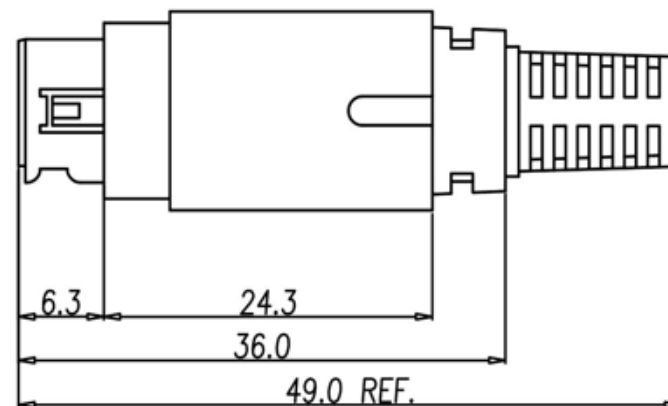
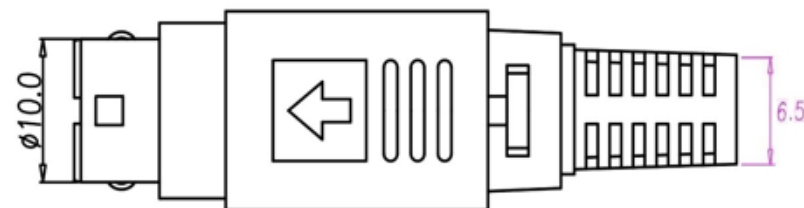


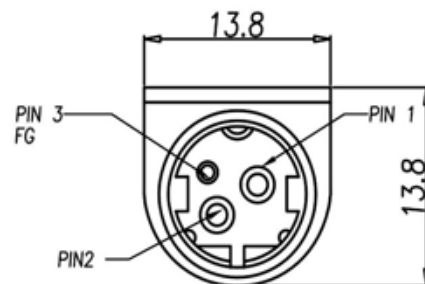

1. MATERIAL :

- 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK.
- 1-2. CONTACT : BRASS.
- 1-3. PLASTIC COVER : ABS ; COLOR : BLACK.
- 1-4. PLASTIC TUBE : ABS OR PC ; COLOR : BLACK.
- 1-5. POM RING : POM ; COLOR : BLACK.
- 1-6. SR : PVC ; COLOR : BLACK.
- 1-7. SPRING : CARBPN STEEL OR STAINLESS STEEL
- 1-8. METAL CAP : BRASS
- 1-9. METAL SHELL: BRASS

2. FINISH :

- 2-1. CONTACT : 50 MICRO INCHES MIN. SILVER PLATED
- 2-4. SPRING : NICKEL PLATED 60u" ~ 100u" OVER ALL.
- 2-4. METAL CAP : NICKEL PLATED 60u" ~ 100u" OVER ALL.
- 2-4. METAL SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL.

3. ELECTRICAL SPECIFICATION :

- 3-1. RATED CURRENT : 4PIN: 7.5A/DC MAX
3PIN: PIN1 & PIN2 7.5A/DC ; PIN3 1A/DC
- 3-2. VOLTAGE : 24V/DC MAX

4. ENVIRONMENTAL :

- 4-1. OPERATION TEMPERATURE : -20 °C~85°C.

RoHS
Compliant

Ninigi

APPD.
核准
DWG.
製圖
DATE 制表日
2019/02/12

SCALE
比例 參考
UNIT
單位
MM
PAGE
張數
1 OF 1

TOLERANCE
尺寸公差
.x ±0.25
.xx ±0.15
.xxx ±0.10
.xxxx ±0.03
ANGULA ±1°
SIZE
紙張尺寸
A 4
REV.
版次
A

PART NAME 品名
POWER DIN 3PIN PLUG ASSEMBLY TYPE
SINGLE-ARROW SR OD:6.5mm
SILVER PLATING BLACK COLOR ROHS
PART NO.
料號 PC-MDP-401-3P