

2940430

<https://www.phoenixcontact.com/gb/products/2940430>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Relay module, with soldered-in miniature switching relay, contact (AgNi): medium to large loads, 2 changeover contacts, input voltage 230 V AC

Your advantages

- Safe isolation between coil and contact side
- Integrated input circuit and interference suppression circuit

Commercial data

Item number	2940430
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	CK6145
Product key	CK6145
Catalog page	Page 135 (IF-2011)
GTIN	4017918080105
Weight per piece (including packing)	56.69 g
Weight per piece (excluding packing)	50.3 g
Customs tariff number	85364900
Country of origin	DE

EMG 17-REL/KSR-W230/21-21-LC - Relay Module



2940430

<https://www.phoenixcontact.com/gb/products/2940430>

Technical data

Notes

General	Only available as AC voltage version.
Utilization restriction	
EMC note	EMC: class A product, see manufacturer's declaration in the download area

Product properties

Product type	Relay Module
Product family	EMG
Application	Universal
Operating mode	100% operating factor
Mechanical service life	approx. 5×10^7 cycles

Insulation characteristics

Insulation	Basic insulation
	Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths

Insulation characteristics: Air clearances and creepage distances between the power circuits

Insulation	Basic insulation
	Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths
Overvoltage category	II
Pollution degree	2

Insulation characteristics: Air clearances and creepage distances between input and contact circuit (or output contact current path)

Insulation	Safe isolation, reinforced insulation
Overvoltage category	III
Pollution degree	2

Electrical properties

Maximum power dissipation for nominal condition	0.92 W
Test voltage (Winding/contact)	4 kV AC (50 Hz, 1 min., winding/contact)
Test voltage (Contact/contact)	1 kV AC (50 Hz, 1 min., changeover contact/changeover contact)

Air clearances and creepage distances between the power circuits

Rated insulation voltage	260 V AC
Rated surge voltage	2.3 kV

Air clearances and creepage distances between input and contact circuit (or output contact current path)

Rated insulation voltage	260 V AC
Rated surge voltage	6 kV

Input data

EMG 17-REL/KSR-W230/21-21-LC - Relay Module



2940430

<https://www.phoenixcontact.com/gb/products/2940430>

Coil side

Nominal input voltage U_N	230 V AC
Input voltage range	184 V AC ... 253 V AC (20 °C)
Mains frequency	50/60 Hz
Drive and function	monostable
Drive (polarity)	polarized
Typical input current at U_N	4 mA
Typical response time	7 ms
	3 ms ... 12 ms
Typical release time	3 ms
Typical release time range	2 ms ... 9 ms
Operating voltage display	Glow lamp

Output data

Switching

Contact switching type	2 changeover contacts
Type of switch contact	Single contact
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Limiting continuous current	5 A
Maximum inrush current	6 A
Interrupting rating (ohmic load) max.	120 W (at 24 V DC)
	95 W (at 48 V DC)
	60 W (at 60 V DC)
	40 W (at 110 V DC)
	55 W (at 220 V DC)
	1250 VA (for 250 V AC)

Connection data

Coil side

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Contact side

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²

EMG 17-REL/KSR-W230/21-21-LC - Relay Module



2940430

<https://www.phoenixcontact.com/gb/products/2940430>

Conductor cross section AWG	24 ... 12
-----------------------------	-----------

Dimensions

Width	17.5 mm
Height	75 mm
Depth	62.5 mm

Material specifications

Color	green (RAL 6021)
-------	------------------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 40 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Standards and regulations

Air clearances and creepage distances between the power circuits

Standards/regulations	IEC 60664-1
-----------------------	-------------

Air clearances and creepage distances between input and contact circuit (or output contact current path)

Standards/regulations	IEC 60664-1
-----------------------	-------------

Standards/regulations

Standards/regulations	EN 61810-1
-----------------------	------------

Mounting


Mounting type	DIN rail mounting
Assembly instructions	in rows with zero spacing
Mounting position	any

2940430

<https://www.phoenixcontact.com/gb/products/2940430>

Drawings

Circuit diagram

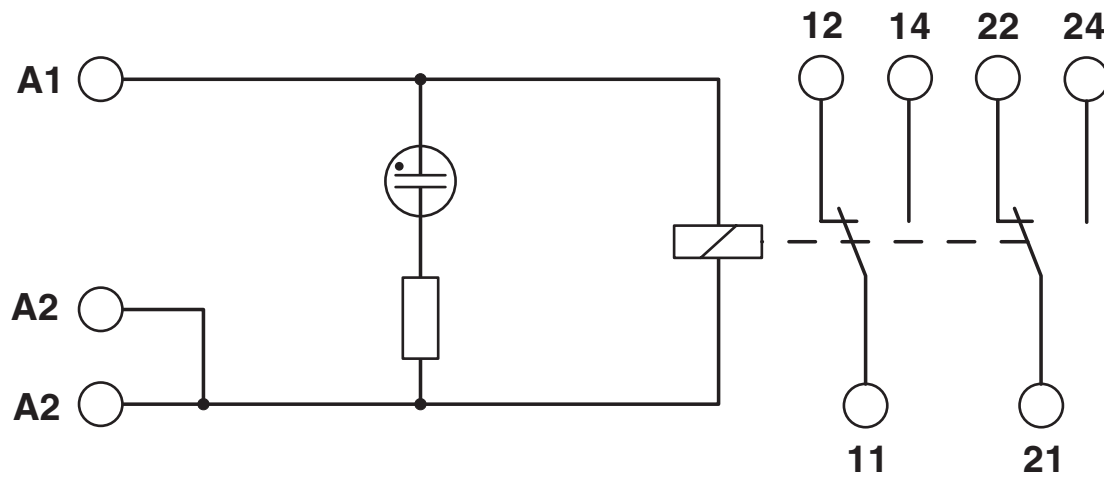

EMG 17-REL/KSR-W230/21-21-LC - Relay Module



2940430

<https://www.phoenixcontact.com/gb/products/2940430>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/2940430>



cUL Recognized
Approval ID: FILE E 238705



UL Recognized
Approval ID: FILE E 238705



EAC
Approval ID: TR_TS_D_00573_c



EAC
Approval ID: RU*C-DE.*08.B.00010

cULus Recognized

EMG 17-REL/KSR-W230/21-21-LC - Relay Module



2940430

<https://www.phoenixcontact.com/gb/products/2940430>

Classifications

ECLASS

ECLASS-11.0	27371601
ECLASS-12.0	27371601
ECLASS-13.0	27371601

ETIM

ETIM 9.0	EC001437
----------	----------

UNSPSC

UNSPSC 21.0	39122300
-------------	----------

EMG 17-REL/KSR-W230/21-21-LC - Relay Module



2940430

<https://www.phoenixcontact.com/gb/products/2940430>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

EMG 17-REL/KSR-W230/21-21-LC - Relay Module



2940430

<https://www.phoenixcontact.com/gb/products/2940430>

Accessories

EMG-GKS 12 - Marking material

2947035

<https://www.phoenixcontact.com/gb/products/2947035>



Device marking label, width: 12 mm, area: 12 x 8 mm, e.g. for EML(10x7) R adhesive marking material

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk