Type PMA-DB-05-Q1R (formerly PDA-01) Panel Mount Fuse Holder 1/4" x 11/4" (6.3 x 30mm) Fuses Driver / Bayonet



www.optifuse.com

(619) 593-5050

Electrical Rating: 15A, 250V AC **Fuse Style:** 1/4" x 11/4" (6.3 x 32mm)

Material:

Frame and Cap: PBT (UL flame: 94V-0)

Terminals: Tin-plated brass

Cap: Slotted Driver type, Bayonet type


Mounting: by nut

Terminal: Solder/Quick-Connect – 4.8mm/0.187"

Panel Thickness: 0.5 ~ 4.5mm **Agency Standards and Listings:**

*'8*1

Product Dimensions: Inches [mm]

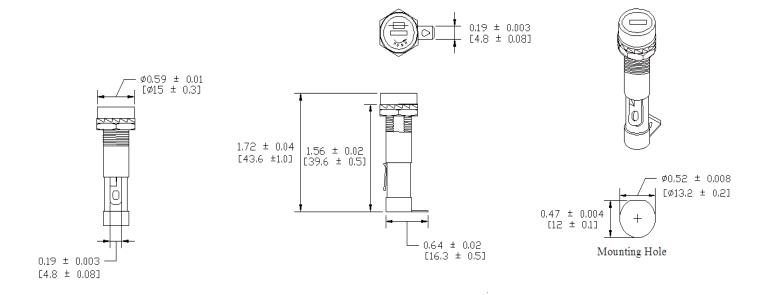

Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse. -Avoid contact of Fuse Holder with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev A 01/2008 - Page: 1/1 Code S02-02D