


Notes:

1. Panel & Cover: PC.
 2. Rocker Switch : R13-249A, on/off.
 3. Fuse Holder : R3-32AA2, fuse $\phi 5.0 \times 20$ L mm.
 4. When turned the switch on, the red led above the switch will lighten.
 5. The switch tray features a rubber mounting gasket and integral cover seal.
 6. The cover includes a clear plastic membrane with rubber over-mould allowing the flexibility to operate the switches while providing a clear window for label backlighting.
- * Sealed: IP66 when locked on the mounting panel.
 * 4 Pcs Tapping Screw $\phi 4 \times 16$ L In Bulk.





Labels are LED backlit for easy night time viewing.

Replaceable clip-on contour wave.
 Customised colours available.


Red systems on leds.

Closed the switch off



Turned the switch on

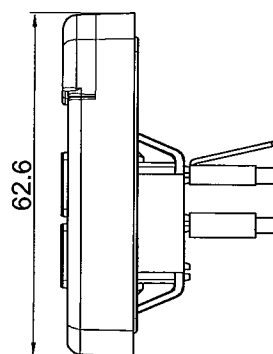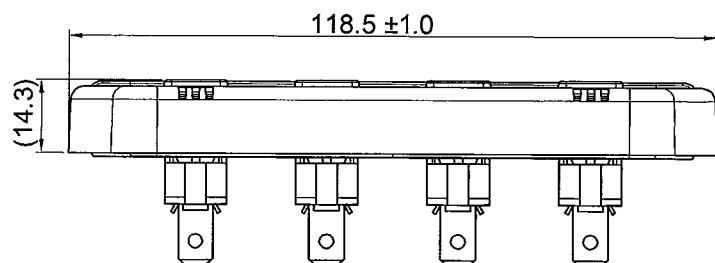

Voltage	12-24V DC
Output Rating	10A max. (per circuit) 15A max. (two circuit)
Operation Temperature	-20°C~+60°C
Switch Function	2P SPST ON-OFF x 4

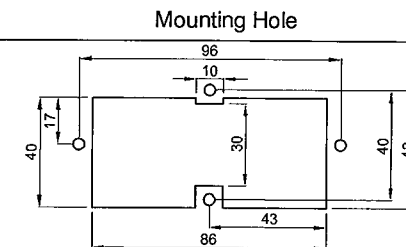

Circuit Diagram

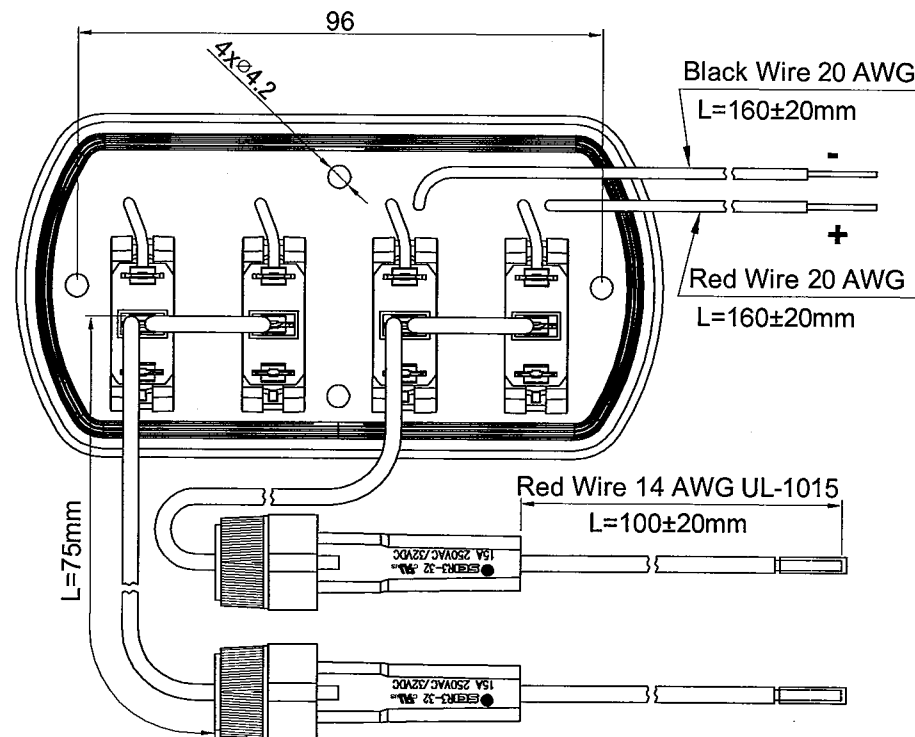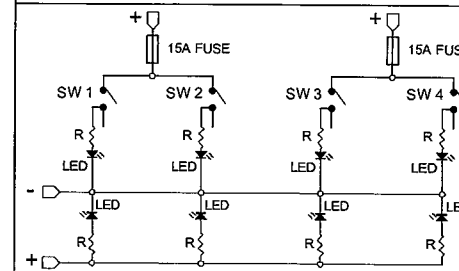

Tolerances Unless Otherwise Specified ± 0.5

Drawn	Checked	Approved	SCI BOM No.	1130411	Model Name	4 Way Spray Proof Switch Panel	
Jam Chan			Customer No.		Model No.	PR18-H4A-249A32AA2	Rev.
Date	Name	Description	No.	7/6/18	Unit	mm	0