


SCHEMATIC

ON - (ON) - SPDT ILLUMINATED
() DENOTES MOMENTARY FUNCTION






RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 11mm [.43 in]

NOTES:

1. DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
- ▲ 3. CONTACT MATERIAL: SILVER
4. RATING: 2A 24VDC
- ▲ 5. LAMP VOLTAGE: 2.8V
6. INGRESS PROTECTION: IP65
7. TRAVEL: 2.8mm
8. OPERATING TEMP.: -20°C to 55°C
9. INSULATION RESISTANCE: 1,000 MΩ MIN.
10. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
11. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
12. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
13. ▲ DENOTES CRITICAL PARAMETER.
14. ALL MATERIAL SHALL BE ROHS COMPLIANT
- ▲ 15. SUPPLIED HARDWARE: O-RING AND HEXNUT
16. USE P/N'S DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS

SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1- (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]

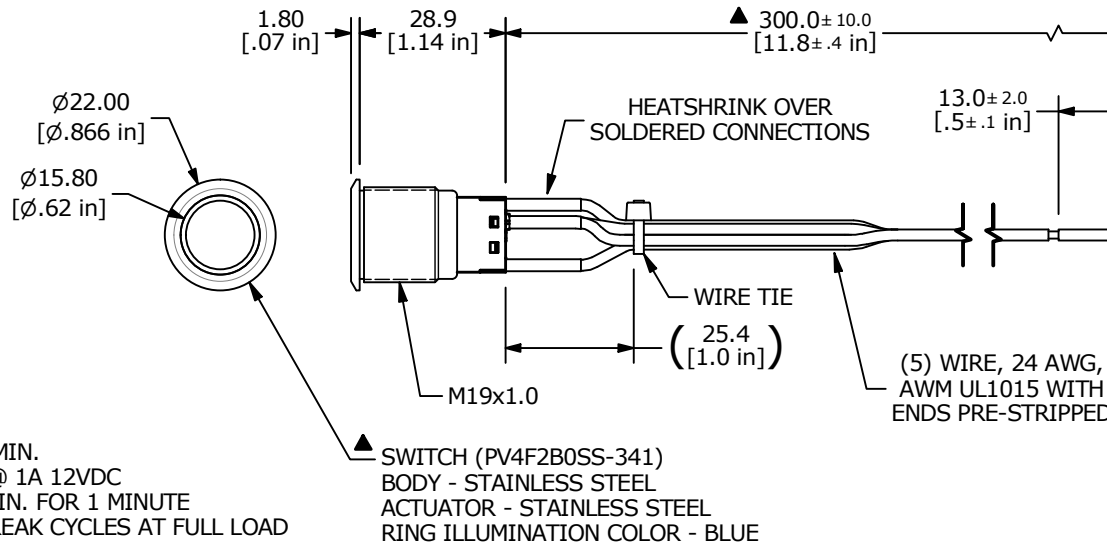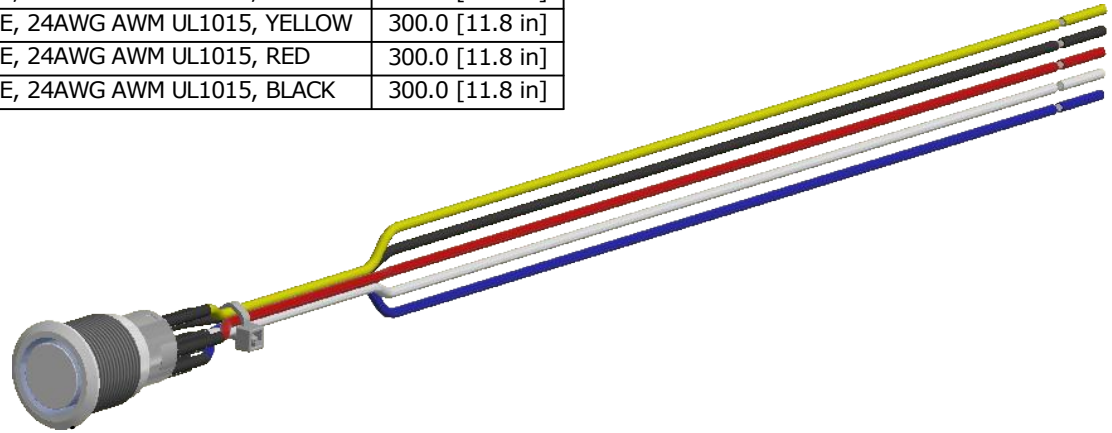

BOTTOM VIEW
SHOWN WITHOUT
WIRING



E-SWITCH®

OBJECT ID
000002745

A	24688	RELEASE	1/15/21	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PV4FWB0SS-341

SCALE 2:3	DATE 1/15/2021	DR MW	DWG 52-PV4FWB0SS341	REV A
--------------	-------------------	----------	------------------------	----------