
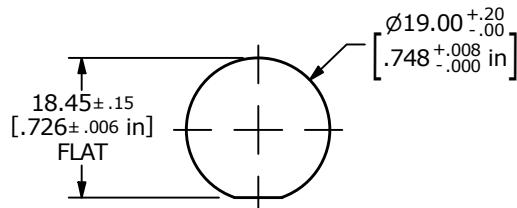


SCHEMATIC
ON - (ON) - DPDT ILLUMINATED
() DENOTES MOMENTARY FUNCTION


SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, ORANGE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1-RED (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1-GREEN (+)	WIRE, 24AWG AWM UL1015, GREEN	300.0 [11.8 in]
SW1-BLUE (+)	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]

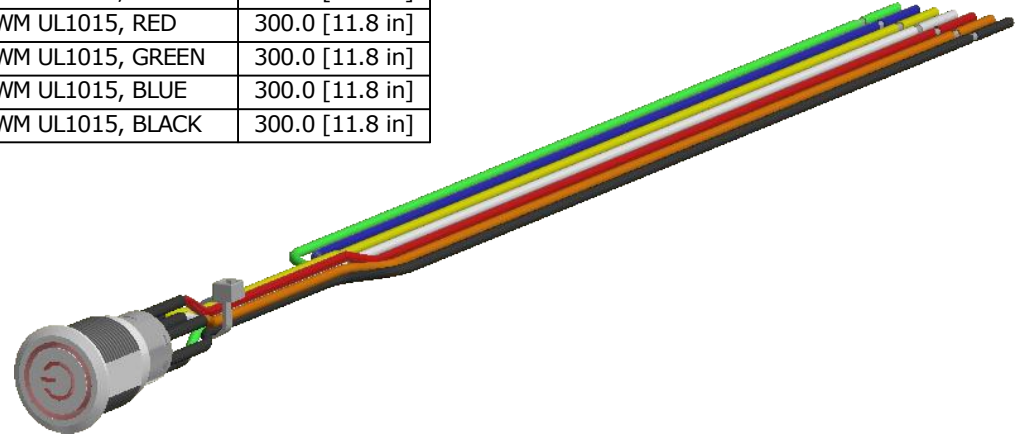

Recommended PANEL CUTOUT
MAX. PANEL THICKNESS:
11.0 [.43 in]

NOTES:

1. DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
- ▲ 3. CONTACT MATERIAL: GOLD
4. RATING: 2A 24VDC
- ▲ 5. LAMP VOLTAGE: RED 1.8V, GREEN 2.8V, BLUE 2.8V
6. INGRESS PROTECTION: IP67
7. TRAVEL: 2.8mm
8. OPERATING TEMP.: -25°C to 55°C
9. INSULATION RESISTANCE: 1,000 MΩ MIN.
10. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
11. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
12. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
13. ▲ DENOTES CRITICAL PARAMETER.
14. ALL MATERIAL SHALL BE ROHS COMPLIANT
- ▲ 15. SUPPLIED HARDWARE: O-RING AND HEXNUT
16. USE P/N'S DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS

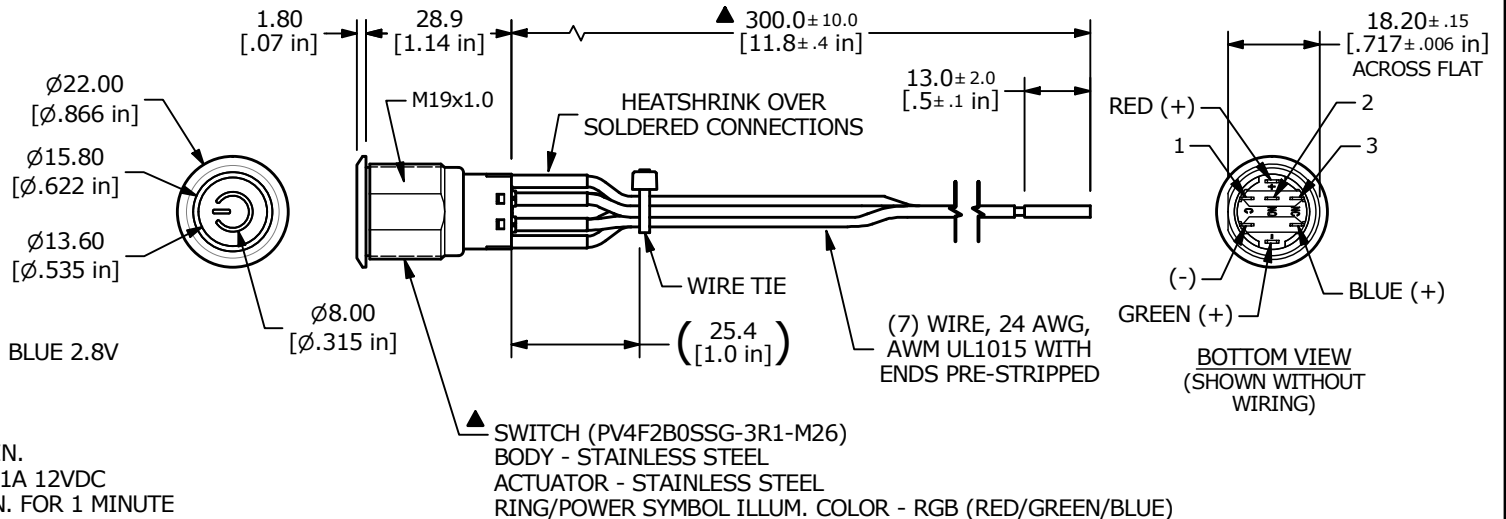

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-100362	Print update	09/16/21	MW	TITLE PV4FWB0SSG-3R1-M26				000002781
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					2:3	2/12/2020	MW	52-PV4S00275	B