


RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 12mm

▲ SWITCH FUNCTION


POS. 1	POS. 2
1-2 ON 3-4 OFF	1-2 OFF 3-4 ON



▲ SPDT ON-OFF / OFF-ON
CONTACT CONFIGURATION



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NOS. FOR REF. ONLY
- RATING: 2A @ 48VDC
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- INSULATION RESISTANCE: 1,000MΩ @ 500VDC
- DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- ELECTRICAL LIFE: 50,000 CYCLES
- OPERATING TEMPERATURE: -20°C to 55°C
- ACTUATION FORCE: 4N
- INGRESS PROTECTION: IP65
- ▲ DENOTES CRITICAL PARAMETER
- HARDWARE INCLUDED (NOT SHOWN) HEX NUT AND O-RING
- ILLUMINATION VOLTAGE:
RED: 1.8V
GREEN: 2.8V
Blue: 2.8V

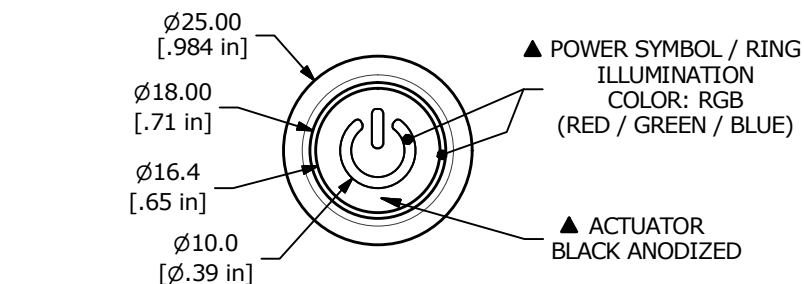

▲ ACTUATOR
BLACK ANODIZED

▲ BODY
BLACK ANODIZED

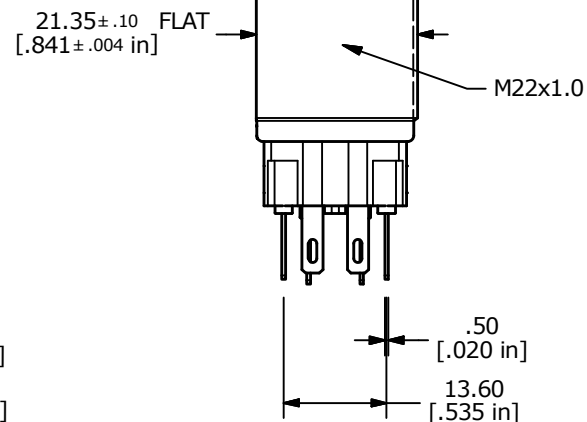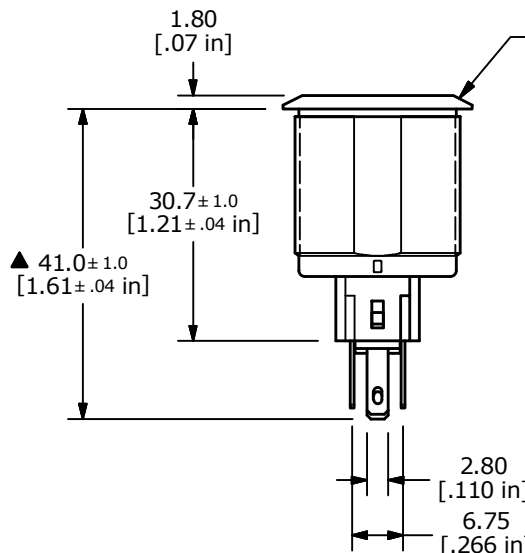

BLUE DOT
INDICATES BLUE
ANODE (+) TERMINAL
FOR LED

BLACK DOT
INDICATES CATHODE (-)
TERMINAL FOR LED

TERMINALS 1 and 2

TERMINALS 3 and 4

GREEN DOT
INDICATES GREEN
ANODE (+) TERMINAL
FOR LED

RED DOT
INDICATES RED
ANODE (+) TERMINAL
FOR LED



A	23816	NEW RELEASE	3/21/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PV7F2T011-3R1-M03

SCALE	DATE	DR	DWG	REV
1:1	3/21/2019	MW	52-PV7F2T0113R1M03	A