
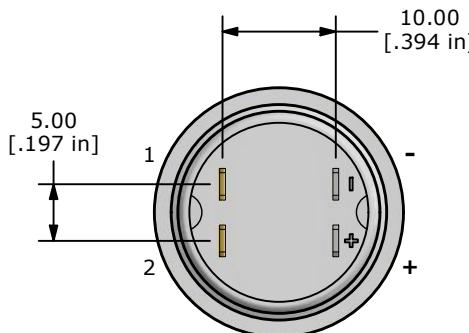
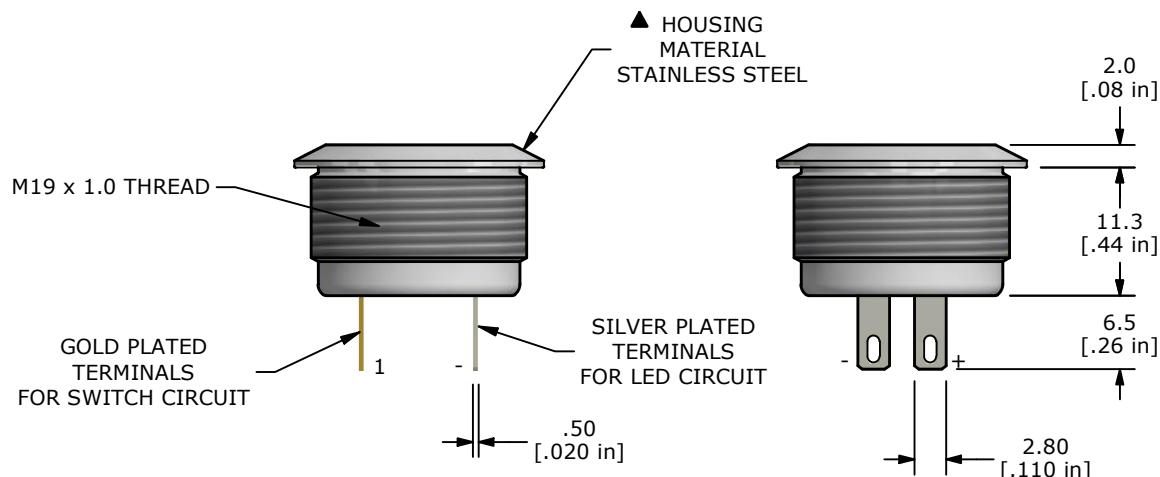
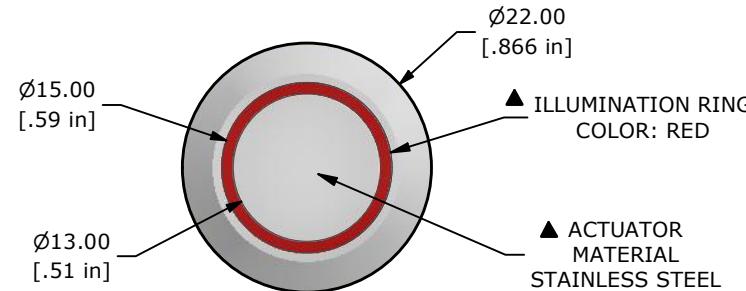


SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
None	1-2
() = MOMENTARY	

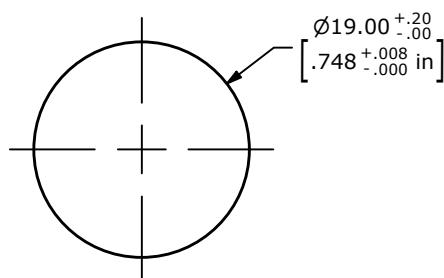

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: Silver
5. RATING: 50mA 24VDC
6. ELECTRIC LIFE: 500,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
7. INSULATION RESISTANCE: 1000 M Ω MIN.
8. DIELECTRIC STRENGTH: 250 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 100m Ω MAX.
10. OPERATING TEMP.: -25°C to +55°C
11. TRAVEL: 0.5mm
12. ▲ DENOTES CRITICAL PARAMETER.
13. INGRESS PROTECTION: IP65
▲14. LED VOLTAGE: 1.8V
15. HARDWARE SUPPLIED: O-RING AND HEXNUT

C	24567	Housing Update	10/27/20	JM
B	23411	update terminal length to 6.5 from 6.0	6/29/18	MW
A	23271	New Release	3/19/2018	RC
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

 OBJECT ID 000003329				
TITLE		PVT4FS4SS311		
SCALE	3:2	DATE	3/19/2018	DR
REV	C	DR	RC	DWG
52-PVT4FS4SS311				