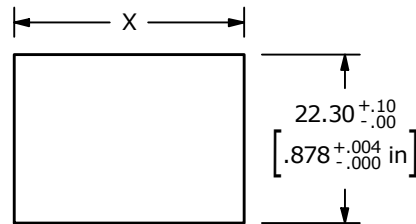



SWITCH FUNCTION ▲

POS. 1	POS. 2	POS. 3
		
OFF	N/A	ON
OPEN	N/A	2-1, 5-4




RECOMMENDED
PANEL MOUNTING

PANEL THICKNESS	X
1.2-1.8	29.9/30.0
1.8-2.4	30.3/30.4
2.4-3.0	30.7/30.8

CIRCUIT: DPST
FUNCTIONS

NOTES:

- ALL DIMENSIONS IN mm [INCH]
- GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
- TERMINAL NUMBERS FOR REF ONLY
- RATING: 12VDC 18A
- MECHANICAL LIFE: 50,000 CYCLES
- CONTACT RESISTANCE: <30 MILLI-OHMS INITIAL
- DIELECTRIC STRENGTH: 1000VAC 1MIN
- ▲ DENOTES CRITICAL PARAMETER.
- INSULATION RESISTANCE: 500M OHMS AT 500VDC
- OPERATING TEMP: -20°C to 85°C
- ▲ LAMP: 12VDC INCANDESCENT
- RATING: IP66

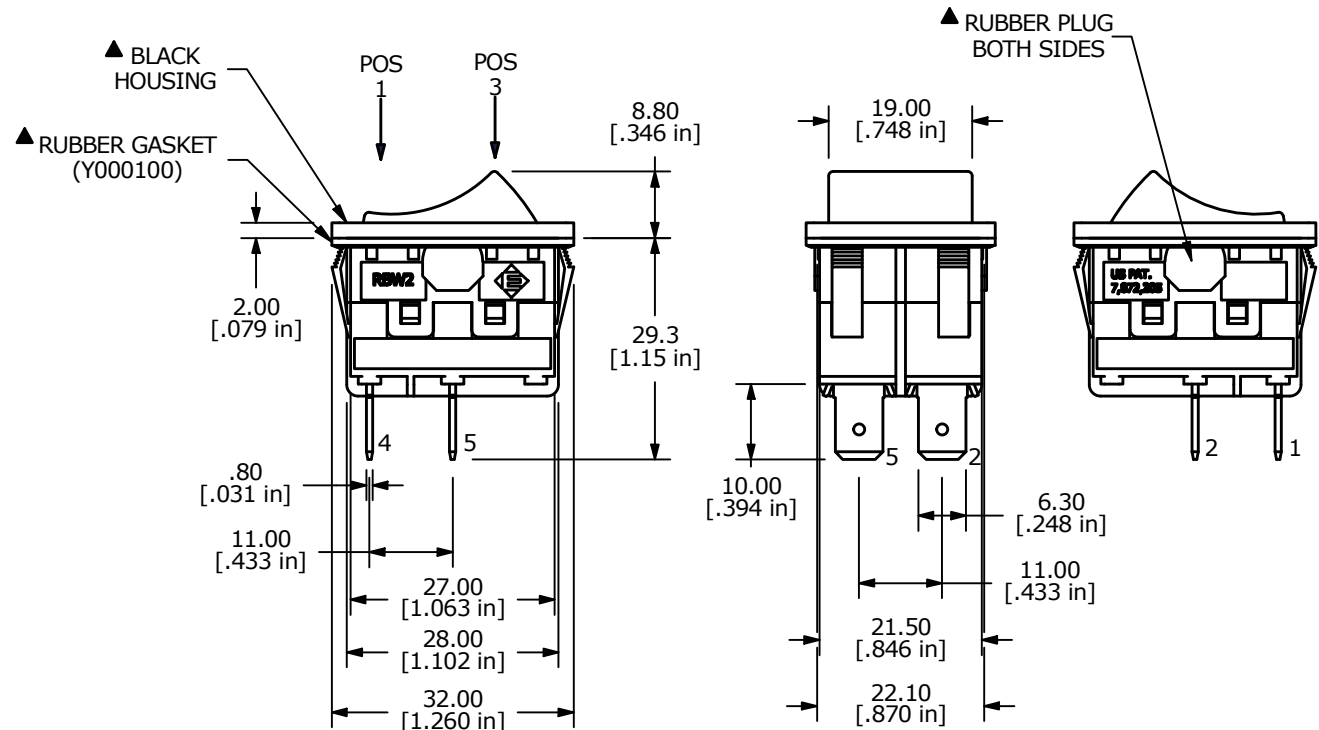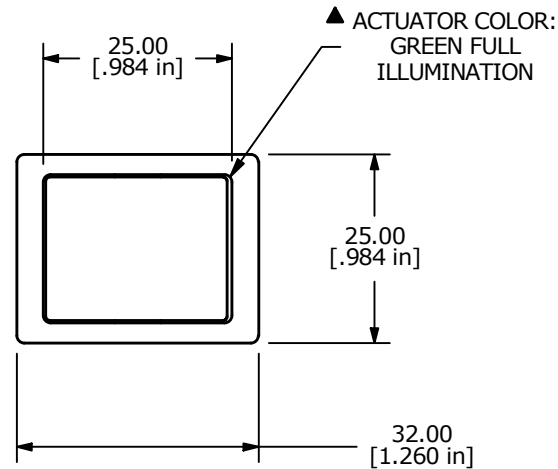

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-100715	REMOVE VDE/ENEC RATING AND LOGO	02/03/22	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID
000028982

TITLE RBW2ABLK GILEF3				
SCALE 1:1	DATE 5/5/2016	DR MJR	DWG Y100016	REV C