



SWITCH FUNCTION ▲

POS. 1	POS. 2	POS. 3
		
OFF	NONE	ON
OPEN	N/A	2-1, 5-4



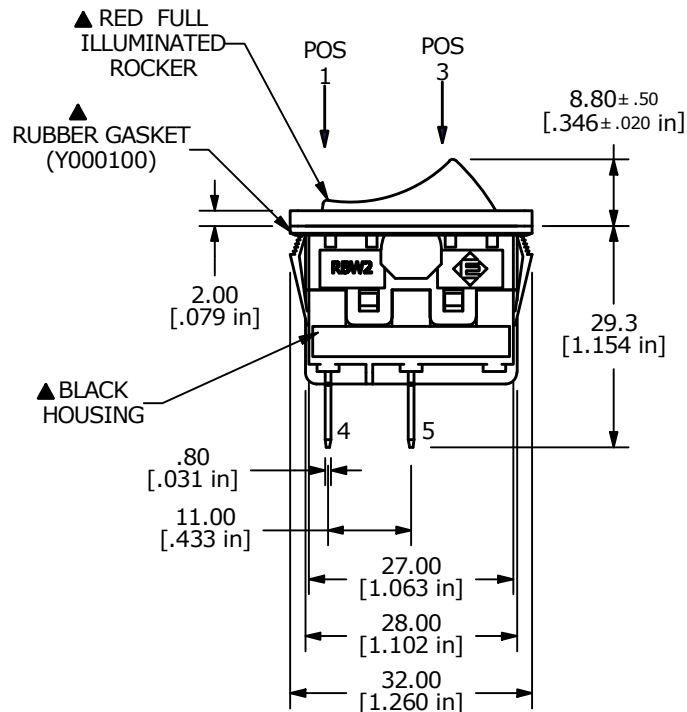
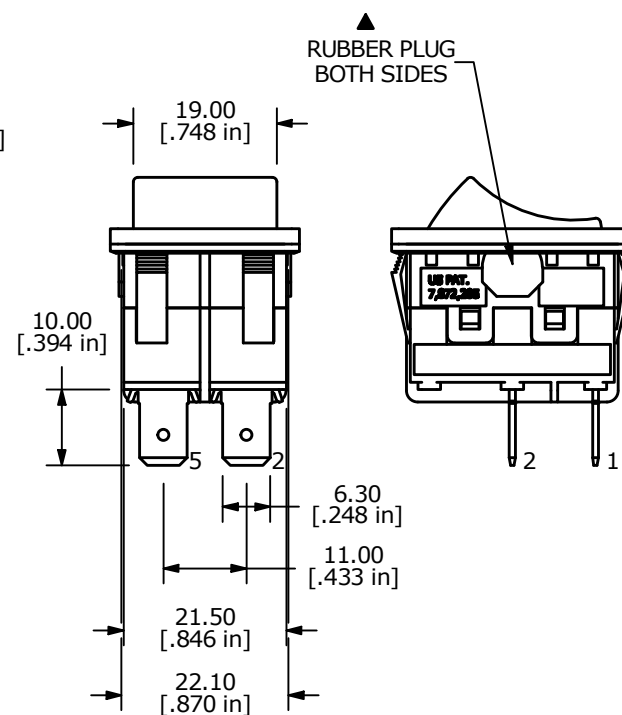
RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
1.2-1.8	29.9/30.0
1.8-2.4	30.3/30.4
2.4-3.0	30.7/30.8

CIRCUIT: SPDT
FUNCTIONS

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: CUL: 16(16)A 125VAC 5E4 T85
1/3HP 125VAC IP66
5. MECHANICAL LIFE: 50,000 CYCLES
6. CONTACT RESISTANCE: <30 MILLI-OHMS INITIAL
7. DIELECTRIC STRENGTH: 1000V AC 1MIN
8. ▲ DENOTES CRITICAL PARAMETER.
9. INSULATION RESISTANCE: 500M OHMS AT 500VDC
10. OPERATING TEMP: -20°C to 85°C
- ▲11. LAMP: 125VAC NEON
12. RATING: IP66

▲ MARKING COLOR
WHITE▲ RUBBER PLUG
BOTH SIDES

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-100546	REMOVE VDE/ENEC RATING AND LOGO	02/02/22	JS



E-SWITCH®

OBJECT ID
000028975TITLE
RBW2ABLKRLFF1SCALE
2:1DATE
4/19/2011DR
BGLDWG
Y100009REV
CTHE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED