REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	C220039	2022/01/07	Nan_Su	E X1
F	C220801	2022/06/07	Vicky	F X1
G	C230221	2023/02/20	Ruru	G X2

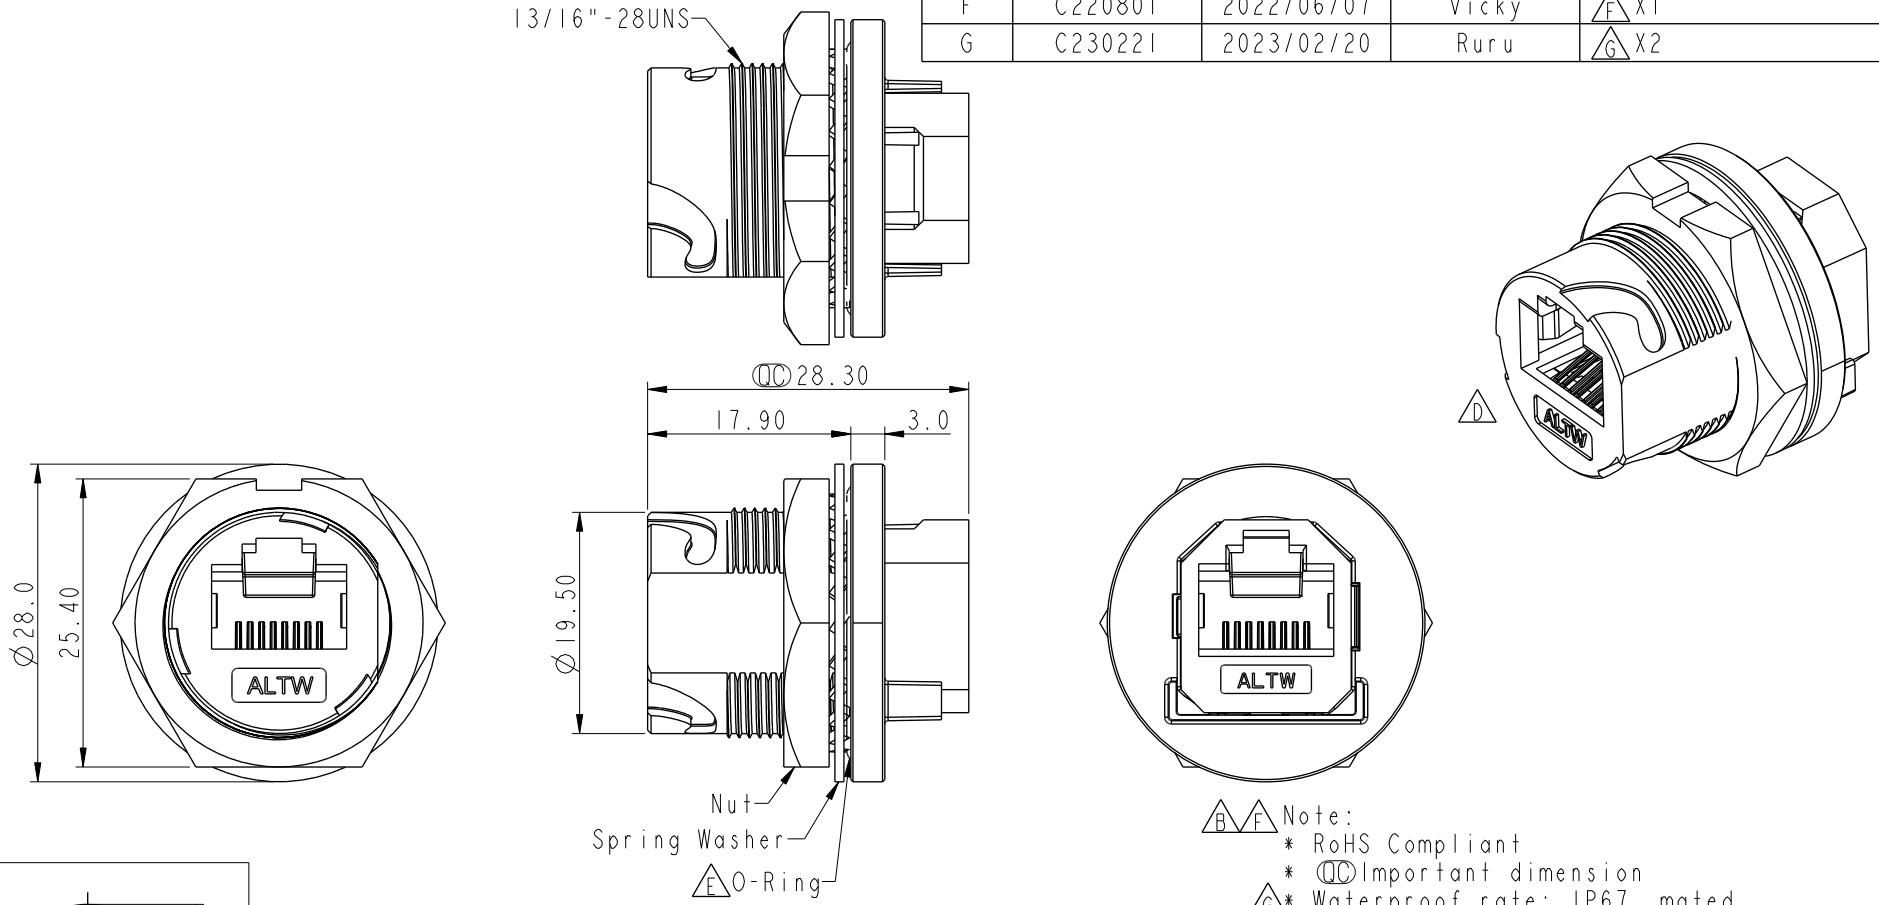



Recommended
Panel Cut-Out

B F Note:
* RoHS Compliant
* QC Important dimension
G * Waterproof rate: IP67, mated
* Connector
  Housing: Metal, RJ45 jack, shielded
* Nut: Metal
* Spring Washer: Metal
C * O-Ring: Rubber, Gray_Black
* Use with waterproof cap or dust cap
  Panel thickness max: 3.0mm
B * Use without waterproof cap or dust cap
  Panel thickness max: 4.2mm
G * Nut and washer are packed separately in pe bag

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: RJ, C METAL, C6A SHLD FRONT FASTENED, F, PNL JACK S, 3LOCK D

SCALE 3:2 | SIZE A4 | SHEET 1 OF 1
REV. G | WC-REV. .0 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO RCM-6APFFH-TCM7001	DRAWN BY JC Chen	DATE 2019-04-16
DWG NO RCM-6APFFH-TCM7001	CHECKED BY Li Feng	DATE 2019-04-16
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-04-16

W10814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.