
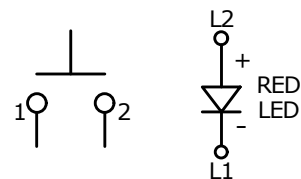
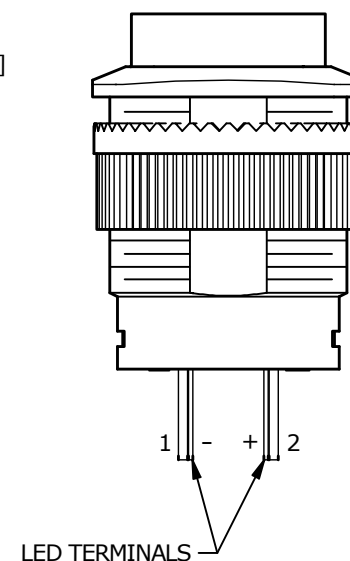
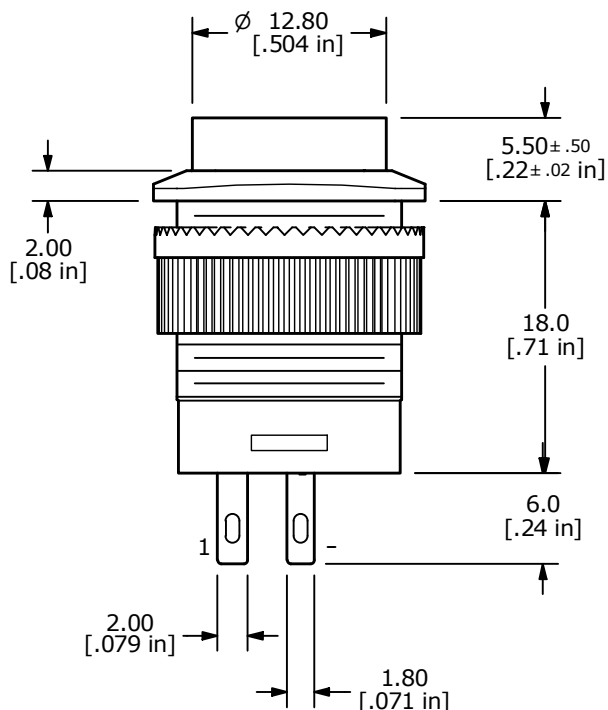
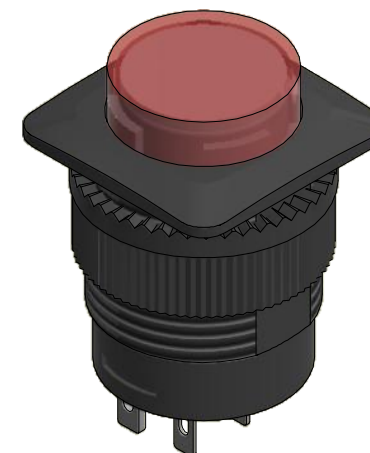


PANEL MOUNTING

▲ CIRCUIT: SPST
LATCHING

▲ ACTUATOR
COLOR: RED
WITH WHITE DIFFUSER
LED COLOR: RED

▲ HOUSING
COLOR: BLACK

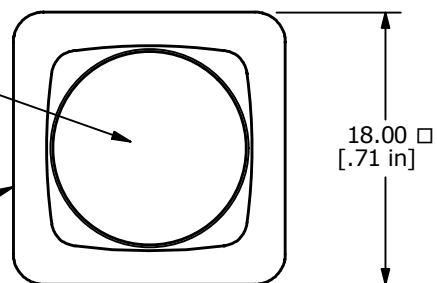

LED TERMINALS

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CIRCUIT: SPST OFF - ON
5. CONTACT RATING: 3A @ 125VAC, 1.5A @ 250VAC
6. ELECTRICAL LIFE: 6,000 CYCLES AT FULL LOAD MIN.
7. CONTACT RESISTANCE: 50 milli-OHM max. (INITIAL)
8. INSULATION RESISTANCE: 100 MEGA-OHM min. @ 500VDC
9. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE.
- ▲ 10. LED: RED
11. OPERATING TEMPERATURE: -0°C to +65°C.
12. PANEL THICKNESS RANGE: 7.0mm MAX.
13. ▲ DENOTES CRITICAL PARAMETER.
14. HARDWARE INCLUDED: MOUNTING NUT

▲ LED SPECS	UNITS	RED
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	1.8-2.4
LUMINOUS INTENSITY	MCD	20

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
F	ECO-100501	print update	10/29/21	MW	TITLE RP3508BBLKREDREDNS				000012186
					SCALE	DATE	DR	DWG	REV
					2:1	1/21/2011	BGL	F130412	F

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED