



PANEL CUT-OUT


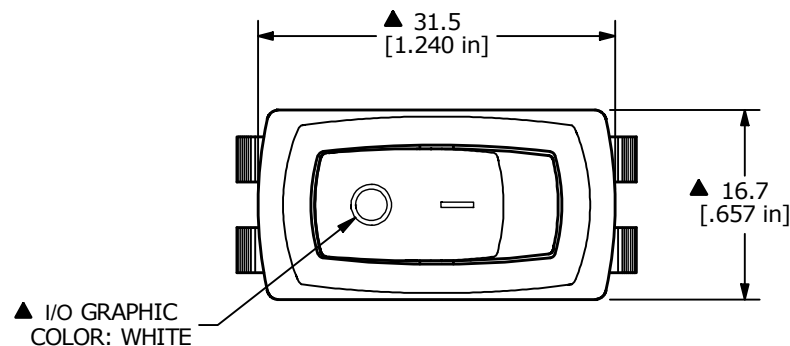


SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
NONE	2-1, 2-3



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- ▲ 3. TERM. NOS. FOR REF. ONLY
4. RATING: 20A 125VAC [cURus]
16A 250VAC [cURus]
3/4HP 125/250VAC [cURus]
5. ELECTRICAL LIFE: 10,000 CYCLES MIN.
6. CONTACT RESISTANCE: 20 m Ω MAX.
7. OPERATING TEMP: -20°C to 85°C
8. DIELECTRIC STRENGTH: >1,000V AC 1MIN
9. INSULATION RESISTANCE: 100 M Ω @ 500VDC
10. LAMP VOLTAGE: 250V
11. ▲ DENOTES CRITICAL PARAMETER.

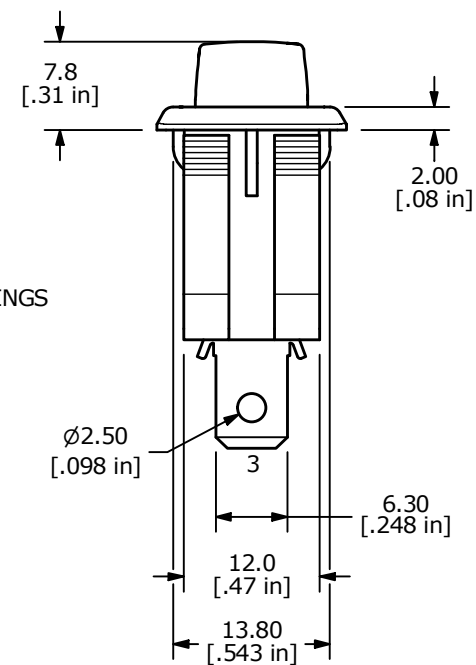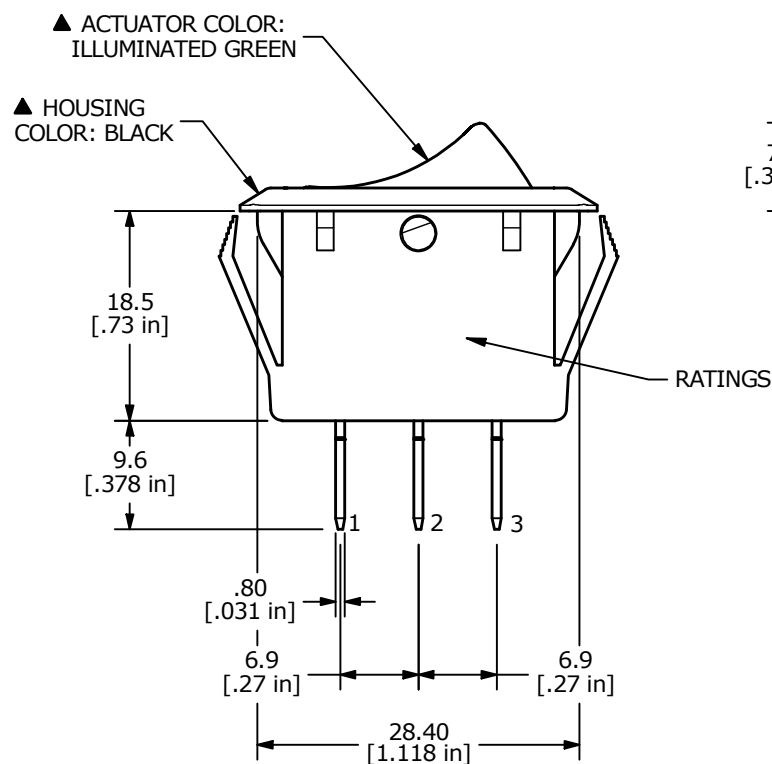

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
E	ECO-100941	update print and add Lamp Voltage 250V to notes	06/22/22	MW	TITLE RSC191D1021-137				000000337
					SCALE	DATE	DR	DWG	REV
					3:2	4/14/2010	BLR	14-RSC191D1021137	E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED