
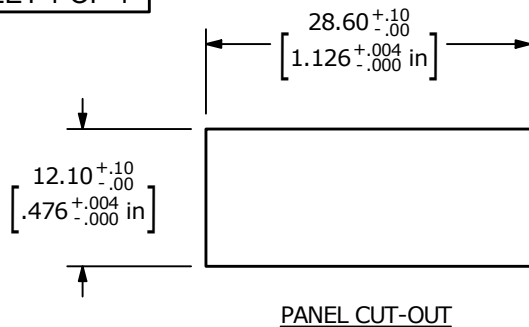




▲ SWITCH FUNCTION

| POS. 1 | POS. 2 |
|--------|--------|
|        |        |
| OFF    | ON     |
| NONE   | 1-2    |



▲ ACTUATOR COLOR:  
ILLUMINATED BLUE

▲ HOUSING  
COLOR: BLACK

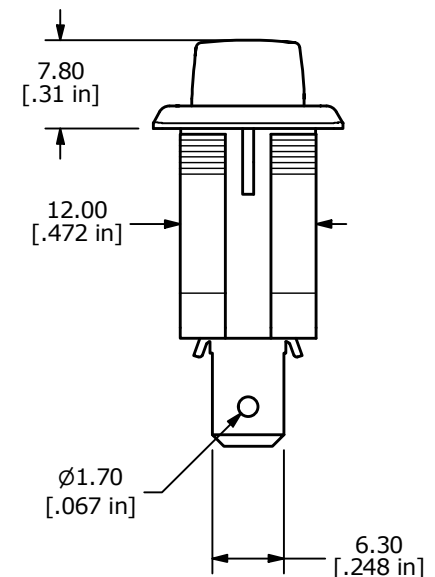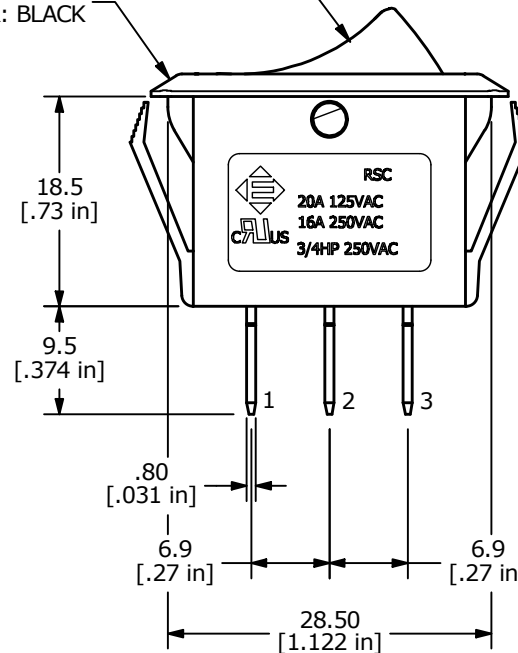

## NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
- TERM. NOS. FOR REF. ONLY
- RATING: 20A 125VAC [cURus]  
16A 250VAC [cURus]  
3/4HP 250VAC [cURus]
- ELECTRICAL LIFE: 10,000 CYCLES MIN.
- CONTACT RESISTANCE: 20 m $\Omega$  MAX.
- OPERATING TEMP: -20°C to 85°C
- DIELECTRIC STRENGTH: >1,000V AC 1MIN
- INSULATION RESISTANCE: 100M $\Omega$  @ 500VDC
- LAMP VOLTAGE: 125V
- ▲ DENOTES CRITICAL PARAMETER.

| REV | ECO NO     | DESCRIPTION                     | DATE     | BY | E-SWITCH®             |          |    |                   | OBJECT ID |
|-----|------------|---------------------------------|----------|----|-----------------------|----------|----|-------------------|-----------|
| B   | ECO-100551 | REMOVE VDE/ENEC RATING AND LOGO | 02/03/22 | JS | TITLE RSC441D1000-146 |          |    |                   | 000000347 |
|     |            |                                 |          |    | SCALE                 | DATE     | DR | DWG               | REV       |
|     |            |                                 |          |    | 1.5:1                 | 3/1/2021 | MW | 14-RSC441D1000146 | B         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED