

Dual signal Addressable SK6813 5050 RGB LED Strip- 30LEDs/m



◆ Product Description:


- Dual signal line transmission LED strip, Break-point resume
- The strip will keep working if any LED becomes damaged or physically removed
- Addressable 30LEDs & 30Pixels/m, cut-able every 33.33mm
- White & Black PCB, DC5V voltage
- 5 Meters per reel, Customized sizes are also available



◆ Product Datasheet

Product Number	S010030CA3SA6	Luminance/M	R:35 G:99 B:20lm
Operating Voltage	DC5V	Ra	/
Power/M	6W	Beam Angle	120°
SMD Type	SMD 5050	Size (mm)	5000 * 10mm
LED Qty/M	30	IP Rate	IP20/IP64/IP65/IP67
Color	RGB	Operation Temperature	- 25 ~ 60 °C
Pixel/M	30	Material	FPC
Control	SPI/SK6813	Cutting Length	33.33mm
Wavelength	R:620-625 G:520-525 B:460-465nm	Net Weight/Roll	0.13KG


◆ Outline Dimension (unit:mm)

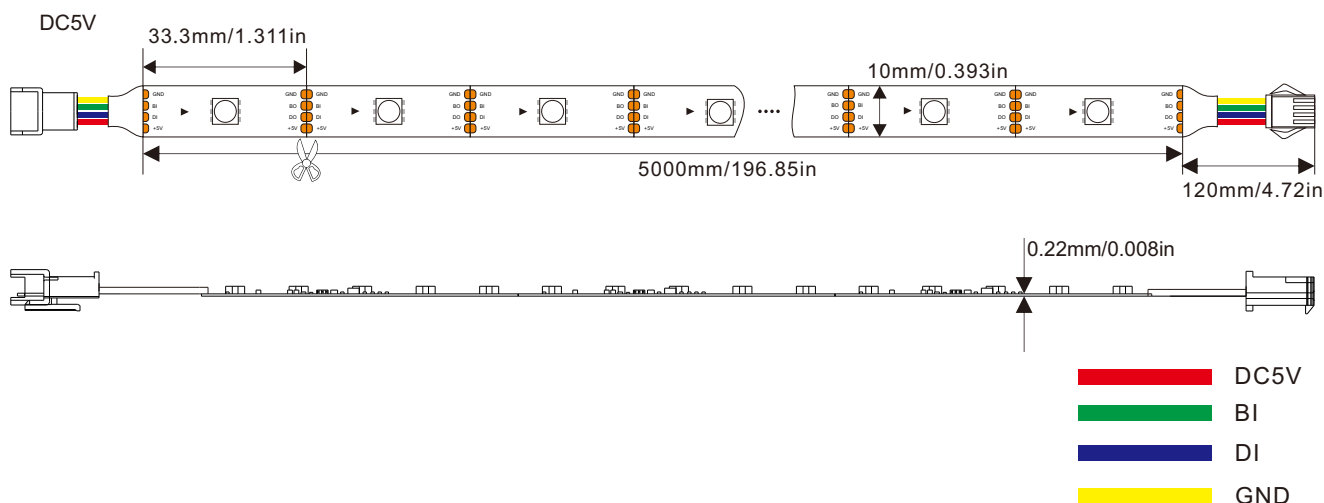


◆ Order number

DC5V	RGB	White PCB	IP20	S010030CA3SA6/C1
DC5V	RGB	White PCB	IP64	S010030CA3SA6/C2
DC5V	RGB	White PCB	IP65	S010030CA3SA6/C3
DC5V	RGB	White PCB	IP67	S010030CA3SA6/C4
DC5V	RGB	Black PCB	IP20	S010030CA3SA6/C5
DC5V	RGB	Black PCB	IP64	S010030CA3SA6/C6
DC5V	RGB	Black PCB	IP65	S010030CA3SA6/C7
DC5V	RGB	Black PCB	IP67	S010030CA3SA6/C8

◆ Wiring diagram

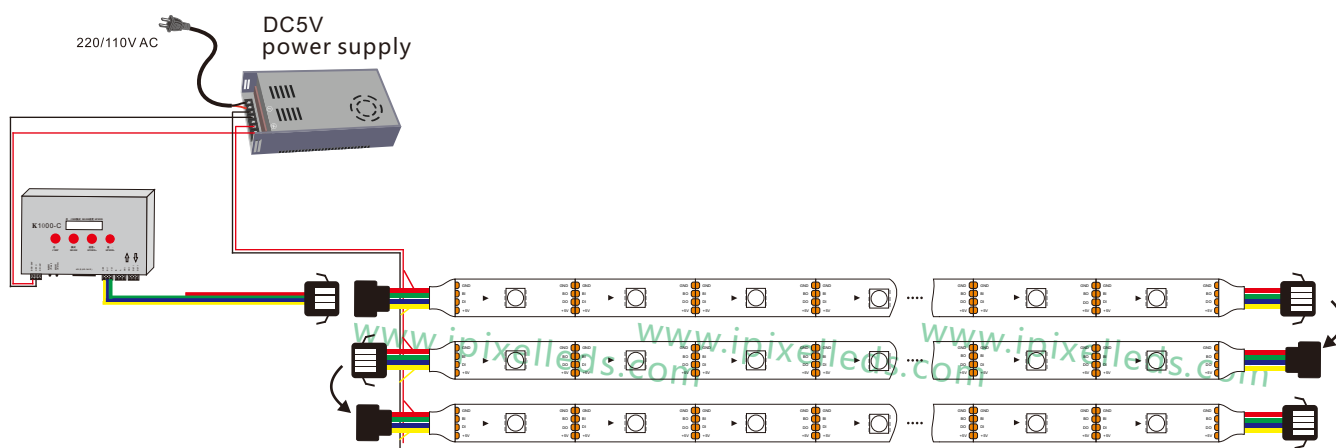

◆ Strip IP Rate



◆ Accessories



Screw



Silicone clip



End cap

Note: The parameters are subject to change without notice!