




**8247**

**Precision 45° Head Oblique Cutters**  
**0.2 mm-1 mm**



## PRODUCT DETAILS

- 80 series oblique cutter 45° with Tapered Head
- ESD safe mono-material handles with return spring
- Flush cut
- The cutting capacity given is for copper wire
- Suitable for cutting Cu
- High performance alloyed steel
- Phosphate finish
- Numerically controlled machine grinding guarantees edge angle accuracy & contact, increases the tools reliability & consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint that minimizes friction & maximizes alignment of cutting edges
- Ideal for rework & close assembly needs
- CO standard handle shape in conductive material

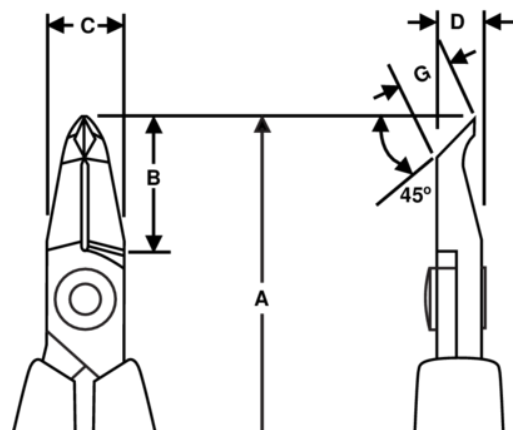

## PRODUCT ATTRIBUTES

### Product: 8247

|                                                                                   |               |                                                                                   |                 |                                                                                   |             |
|-----------------------------------------------------------------------------------|---------------|-----------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------|-------------|
|  | Angle<br>45°  |  | S               | <b>A</b>                                                                          | 117.5<br>mm |
| <b>A</b>                                                                          | 4.63 in       | <b>B</b>                                                                          | 18 mm           | <b>B</b>                                                                          | 0,71<br>in  |
| <b>C</b>                                                                          | 10 mm         | <b>C</b>                                                                          | 0.39 in         | <b>D</b>                                                                          | 6 mm        |
| <b>D</b>                                                                          | 0,24<br>inch  | <b>G</b>                                                                          | 6,7 mm          | <b>G</b>                                                                          | 0,26<br>in  |
|  | 0.2-1.0<br>mm |  | 0.01-0.04<br>in |  | Flush       |
|  | 51 g          | <b>Ω</b>                                                                          | Dissipative     |                                                                                   |             |

### Product: 8247 CO

|                                                                                   |               |                                                                                     |                 |                                                                                     |             |
|-----------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------|-------------|
|  | Angle<br>45°  |  | S               | <b>A</b>                                                                            | 117.5<br>mm |
| <b>A</b>                                                                          | 4.63 in       | <b>B</b>                                                                            | 18 mm           | <b>B</b>                                                                            | 0,71<br>in  |
| <b>C</b>                                                                          | 10 mm         | <b>C</b>                                                                            | 0.39 in         | <b>D</b>                                                                            | 6 mm        |
| <b>D</b>                                                                          | 0,24<br>inch  | <b>G</b>                                                                            | 6,7 mm          | <b>G</b>                                                                            | 0,26<br>in  |
|  | 0.2-1.0<br>mm |  | 0.01-0.04<br>in |  | Flush       |
|  | 51 g          | <b>Ω</b>                                                                            | Conductive      |                                                                                     |             |