

Data sheet Product SK 21 Z

- [Print data sheet](#)
- [Recommend page](#)



Sockets>High-precision contacts, loose

Socket contact for square 0.64 mm and 0,8 mm round contact

Features

contact material:	CuZn-alloy
contact spring:	gold-plated
contact sleeve:	tin-plated
surface contact / contact sleeve:	Ni+4...6µm Sn
inner contact spring material:	CuBe-alloy
inner contact spring surface:	Ni+0,75µm Au
plugability for circuit points:	<ul style="list-style-type: none">• □0,55...0,65mm• Ø0,65...0,85mm
insert depth:	2.5...3.6mm

insertion / drawing force: 1.3N/0.3N

type: female

nominal current: 3 A


nominal voltage: 150 V DC

test voltage: 1500 V

connection type: THT (soldering)

grid: 2.54 mm

Technical Drawing

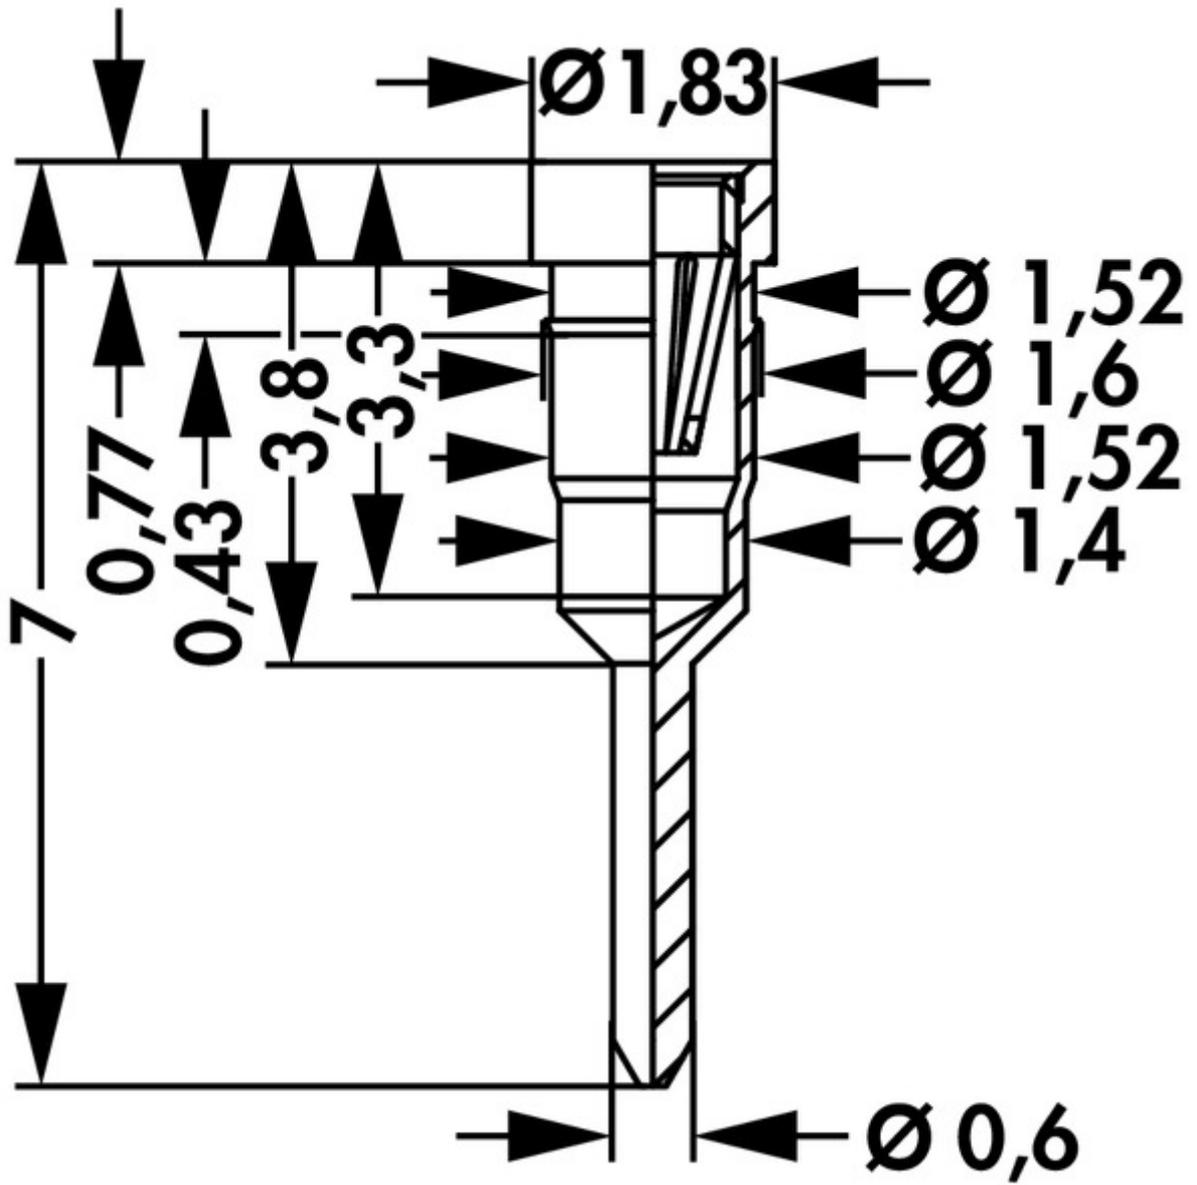

Fischer Elektronik GmbH & Co. KG
 DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
 58511 Lüdenscheid

Telefon +49 2351 435-0
 Telefax +49 2351 45754

info@fischerelektronik.de
 www.fischerelektronik.de