Switching probe

SKS-215 002 180 A 3002 MF

Item SKS-215-0240






- For a wide range of applications: performs components detection check, is a switch for detecting closed/open states, and a signal transmitter for process control
- Various collar heights are available on the receptacles to adjust the installation height
- The installation height can be varied, and the position of the switching point can be precisely adjusted via the probe's thread. The SKS is secured in the correct position by crimp point in the KS.
- The electrical connection is ensured by installation using a receptacle, optionally available with a quick-change system for easy exchange during maintenance







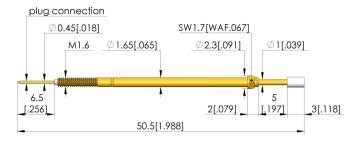



3 A

General data

Switching probes Product group: Sub-product group: SKS (screwed-in) SKS-215 MF quick-exchange system, screw-in Series: Grid: 2.54 mm [100 mil] Contacting from: Presence check Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: Yes Non-rotating: No Screw-in torque: 3 - 5 cNm [.265 - .442 lbf·in] Compatible receptacle(s): KS-215 M-F Min. temperature: - 40 °C [- 104 °F] Max. temperature: +80 °C [+176 °F] RoHS-compliant: RoHS-3;6c

Electrical data

Current load capacity / rated current:

Mechanical data

50.5 mm [1.98 in] Total length: Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 5 mm [.196 in] Spring pre-load: 0.5 N [1.79 ozf] Collar height: Switch path: 1.5 mm [.059 in] Switching point: 8.5 mm [.334 in] Spring force at switching point: 0.9 N [3.23 ozf]

Switching probe

SKS-215 002 180 A 3002 MF

Item SKS-215-0240





Tip style data

Tip style: Tip diameter: Tip style surface: Tip style material: 002 flat, contact surface insulated 1.8 mm [.070 in] A gold 0 plastic

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about **Test probes**

