# Switching probe

# SKS-215 306 230 A 1502 MF

Item SKS-215-0281






- For a wide range of applications: performs components detection check, is a switch for detecting closed/open states, and a signal transmitter for process control
- Various collar heights are available on the receptacles to adjust the installation height
- The installation height can be varied, and the position of the switching point can be precisely adjusted via the probe's thread. The SKS is secured in the correct position by crimp point in the KS.
- The electrical connection is ensured by installation using a receptacle, optionally available with a quick-change system for easy exchange during maintenance








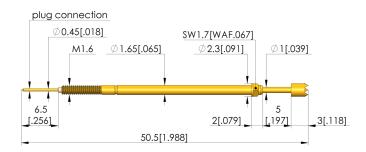

+ 80 °C [+ 176 °F]

RoHS-3;6c



#### **General data**

Switching probes Product group: Sub-product group: SKS (screwed-in) Series: SKS-215 MF quick-exchange system, screw-in 2.54 mm [100 mil] Grid: Pin, Post, Flat contact Contacting from: Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: Non-rotating: Screw-in torque: 3 - 5 cNm [.265 - .442 lbf·in] Compatible receptacle(s): KS-215 M-F Min. temperature: +0°C[+32°F]

### **Mechanical data**

Total length: 50.5 mm [1.98 in] Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 5 mm [.196 in] Spring pre-load: 0.25 N [.899 ozf] Collar height: Switch path: 1.5 mm [.059 in] Switching point: 8.5 mm [.334 in] Spring force at switching point: 0.45 N [1.61 ozf]

#### Tip style data

Tip style: 06 serrated Tip diameter: 2.3 mm [.090 in] Tip style surface: A gold Tip style material: 3 CuBe

#### **Electrical data**

RoHS-compliant:

Max. temperature:

Current load capacity / rated current: 3 A

## **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Test probes

