

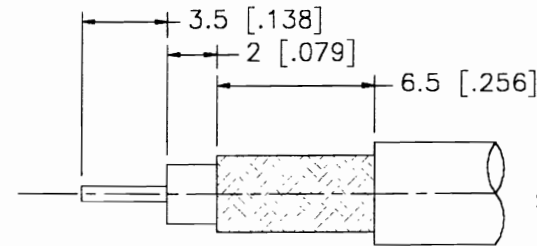


REV.	DATE	DESCRIPTION
NC	11/20/97	INITIAL RELEASE

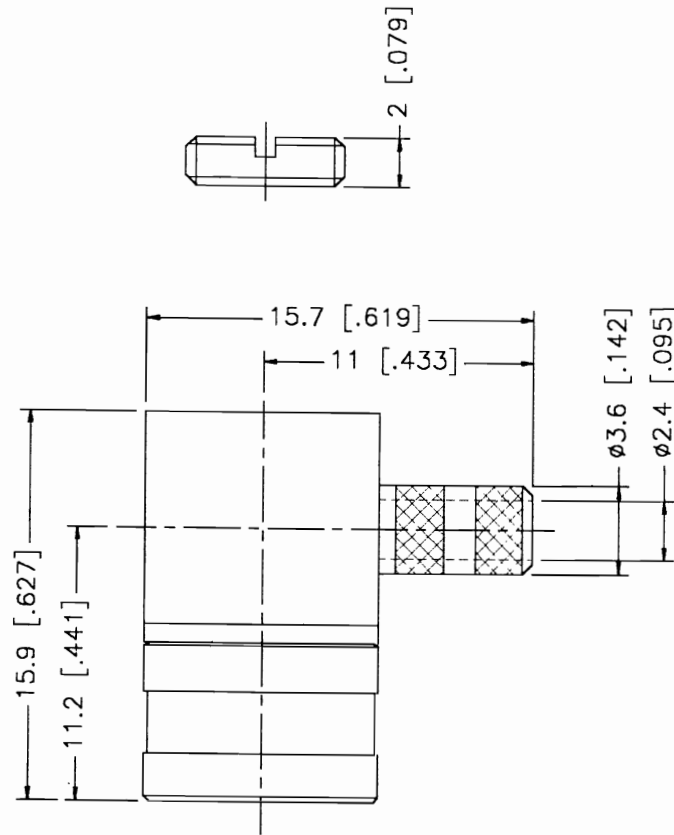

RECOMMENDED CABLE
STRIPPING DIMENSIONS

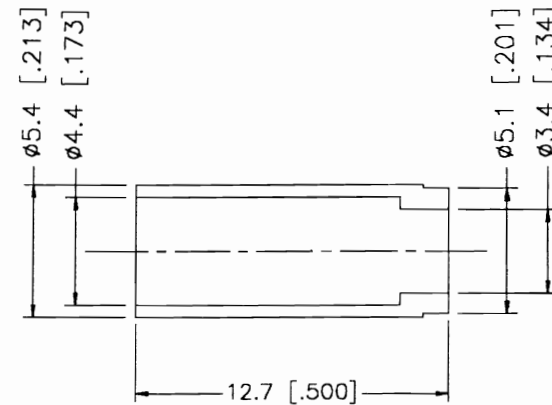

CRIMP Ferrule - 178
solder contact

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	 Connector Corporation			
1 BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN G.R.S.	11/20/97				
2 INSULATOR	TEFLON	NATURAL		CHECKED		TITLE			
3 CONTACT PIN	BER. COPPER	GOLD		ISSUED		SMB R/A CRIMP PLUG AT&T 735A CABLE			
4 FERRULE	BRASS	GOLD				SIZE	FSCM NO.	DWG. NO.	REV.
5 NUT	BRASS	GOLD				A	99001	142203.DWG	NC
6						SCALE	NA	PART NO.	142203
7						SHEET			1 OF 1
8			DO NOT SCALE DRAWING						