




X CLOSE

Push Switch > SPUJ Series > SPUJ191500

2.0mm-travel Horizontal Type SPUJ Series

| [Dimensions](#) | [Mounting Hole Dimensions](#) | [Actuator Configuration at Front Edge](#) |
| [Circuit Diagram](#) | [Packing Specifications](#) | [Soldering Conditions](#) |
| [Products Line of Knob](#) |

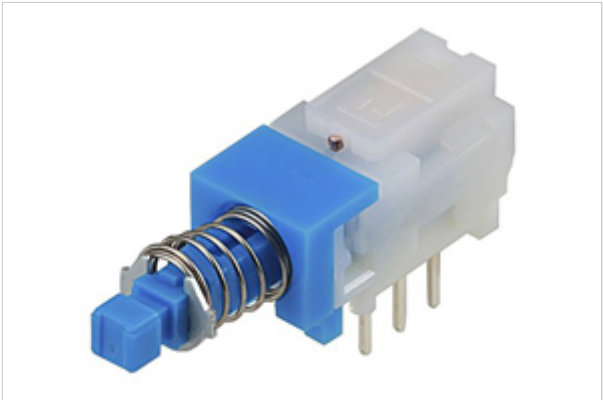

Part number [Series Common Info](#)
SPUJ191500

NET SHOP

3D CAD


RoHS

Print


Inquiry

Changeover timing	Non shorting	
Travel	2mm	
Total travel	3mm	
Operating force	1.5 ± 1N	
Mounting method	PC board	
Poles	2	
Operation	Momentary	
Terminal type	Straight	
Operating temperature range	-10°C to +60°C	

Dimensions

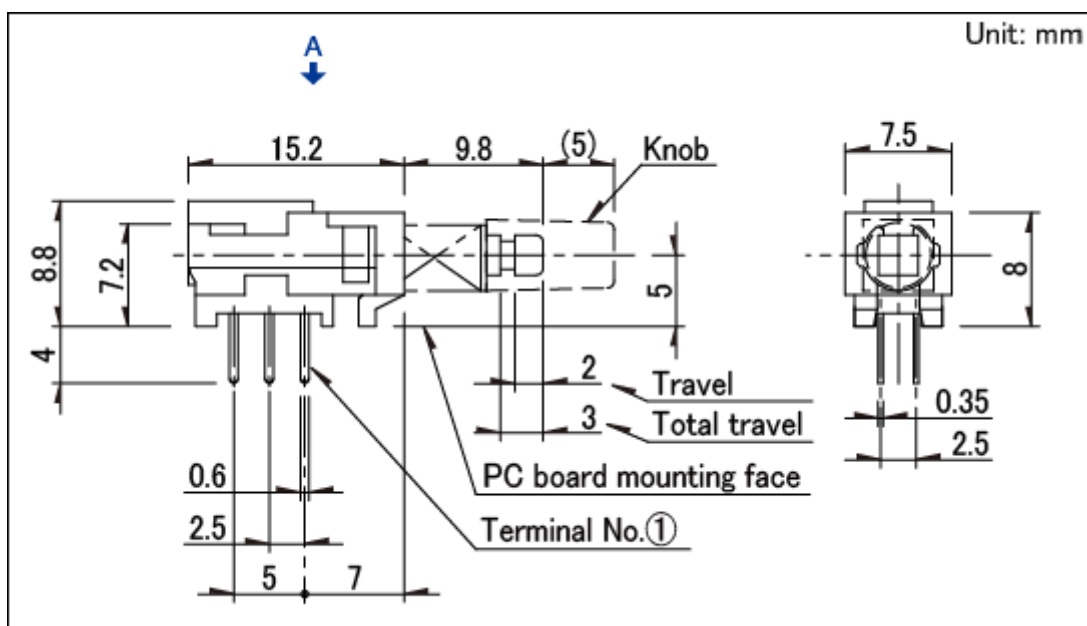


Mounting Hole Dimensions

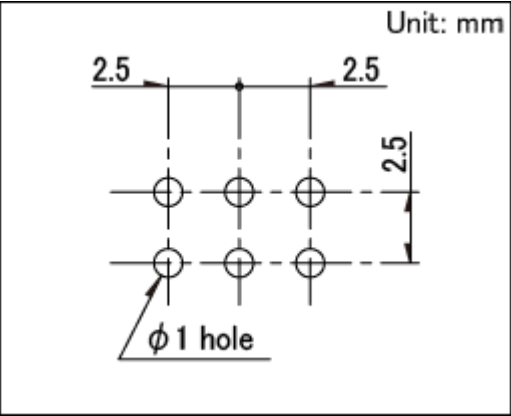


Viewed from direction A in the dimensions.

Actuator Configuration at Front Edge

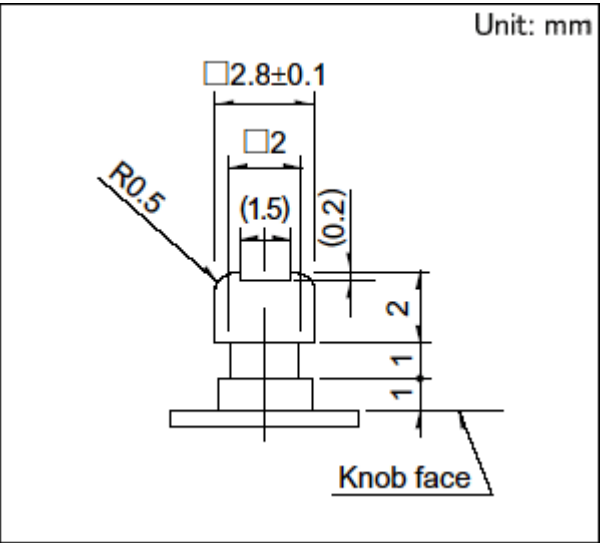

Circuit Diagram

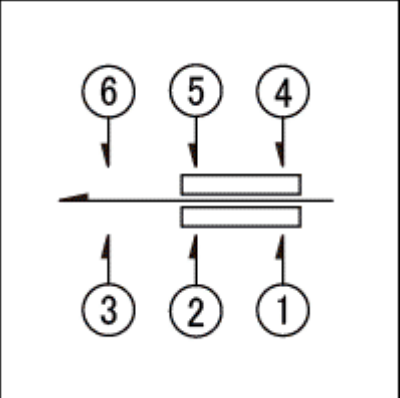

Packing Specifications

Bulk

Number of	1 case / Japan	600
packages (pcs.)	1 case / export packing	3,000
Export package measurements (mm)	400 × 270 × 290	

Soldering Conditions


Reference for Dip Soldering

Items	Preheating temperature-	
	Preheating time	-
Dip soldering	Soldering temperature	260 ± 5°C
	Duration of immersion	5 ± 1s


Reference for Hand Soldering

Soldering temperature	300 ± 5°C
Soldering time	3+1/0s

Products Line of Knob

Knob outline drawing (Unit :mm)	Color	Model
	Black	UJ206022

We recommend the use of adhesive to secure the knob when mounting onto switches.



Notes are common to this series/models.

1. This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
2. Please place purchase orders per minimum order unit (integer).
3. Products other than those listed in the above chart are also available. Please contact us for details.

Inquiries about Products

[Inquiry.](#)

COPYRIGHT© 2020 ALPS ALPINE CO., LTD