

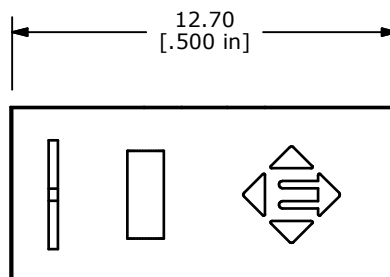


PANEL MOUNTING

ISOMETRIC
SCALE: 3:1


O.P. (MM)	P.T. (MM)
7.0 ±0.2	0.35

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
- ▲ 3. RATING: 0.4VA MAX. @ 20VDC MAX.
4. CONTACT RESISTANCE: 100 Milli-OHMS MAX.
5. OPERATING FORCE: 130 ± 40 GRAMS
6. OPERATING TEMP: -25°C TO 75°C
7. ELECTRICAL LIFE: 10,000 CYCLES MIN.
8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
9. DIELECTRIC STRENGTH: 1,500VAC - 1 MINUTE
- ▲ 10. DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT
12. PACKAGED IN TRAYS, 200 PIECES PER TRAY
13. 2002/95/EC (ROHS) COMPLIANT

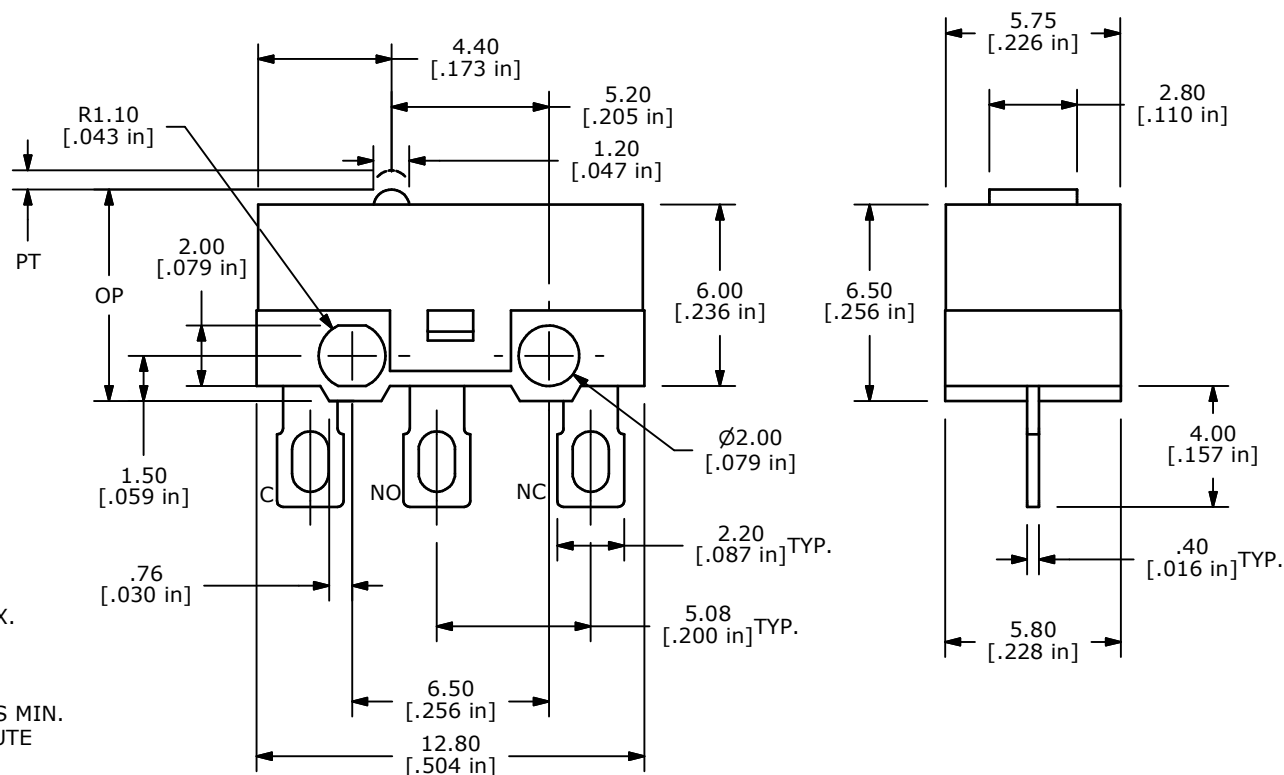

TITLE SS075R100F130S1A

A	18660	Released For Production	9/29/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4:1

DATE 9/29/2009

DR BLR

DWG Q971027

REV A