
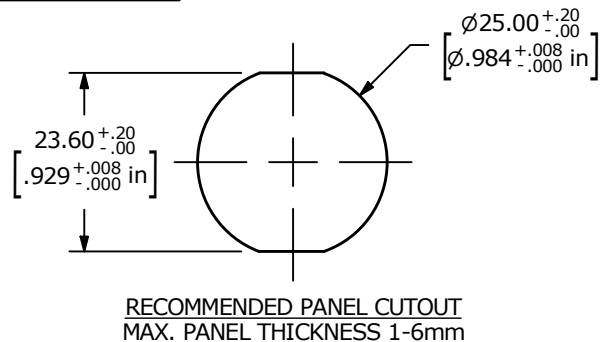
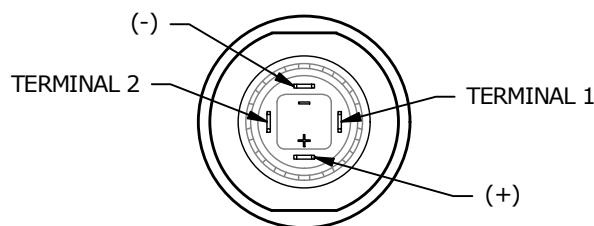
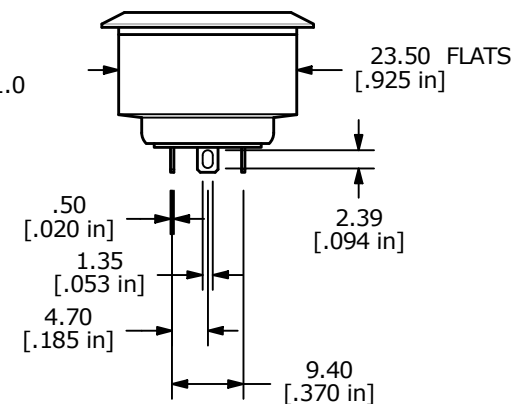
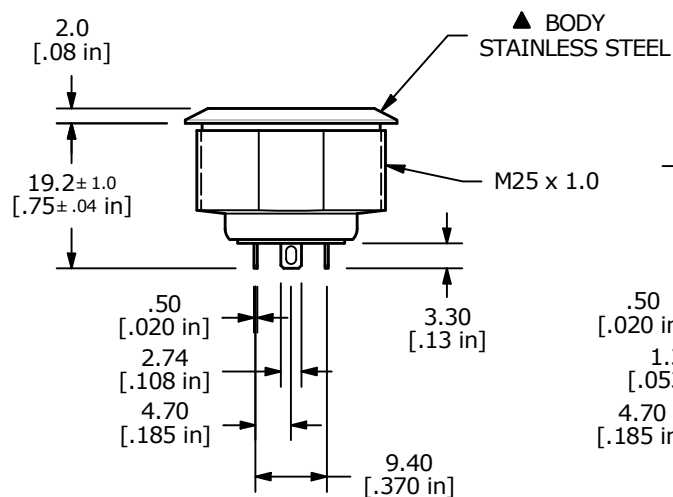



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 2A 36 VDC
6. ELECTRIC LIFE: 200,000 CYCLES
7. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
8. CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC
9. OPERATING TEMP.: -20°C to 70°C
10. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 11. LAMP VOLTAGE: RED 20mA 2.0V typ., BLUE 20mA 3.1V typ.
12. TRAVEL: 1.80mm
13. ACTUATION FORCE: 4.5 $\pm$ 1.5 N
14. MOUNTING NUT TORQUE: 1-3 Nm
15. INGRESS PROTECTION: IP67
16. HARDWARE SUPPLIED: O-RING AND HEXNUT

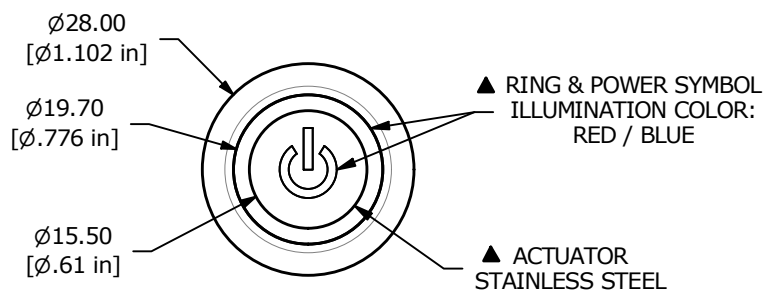

C	24697	update cutout	1/20/21	MW	 E-SWITCH®			
B	24211	changed description and Lamp Voltage	3/2/20	MW				
A	24091	NEW RELEASE	11/5/19	MJR	TITLE SV8F23SS-6H1			
REV	PCR NO	DESCRIPTION	DATE	BY	SCALE 1:1	DATE 11/5/2019	DR MJR	DWG T880001
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					REV C			