

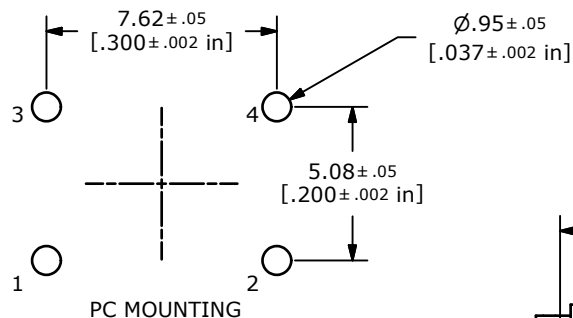


▲ CIRCUIT: SPST

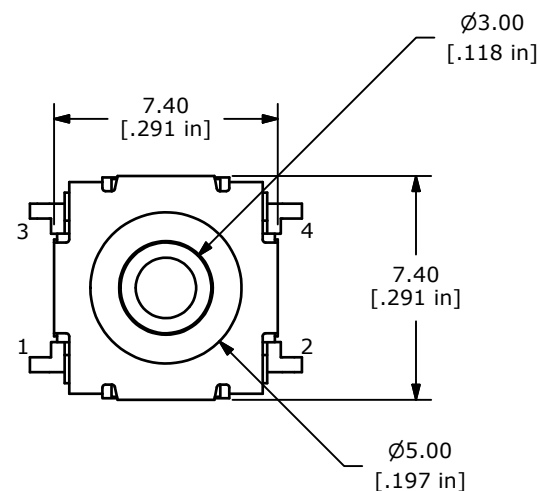

NOTES

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. OPERATING FORCE: $160 \pm 50\text{gf}$
5. OPERATING LIFE: 1,000,000 CYCLES
6. TRAVEL: $0.5 \pm 0.15\text{mm}$
7. CONTACT RATING: 12VDC @ 50mA
8. CONTACT RESISTANCE: $100\text{m } \Omega$ MAX
9. INSULATION RESISTANCE: $100\text{M } \Omega$ MIN @ 100VDC.
- ▲ 10. CONTACT MATERIAL: SILVER
11. OPERATING TEMPERATURE: -40°C TO 85°C
12. PACKAGING: TUBE 60 PCS. PER
13. ▲ DENOTES CRITICAL PARAMETER
14. 2002/95/EC (ROHS) COMPLIANT

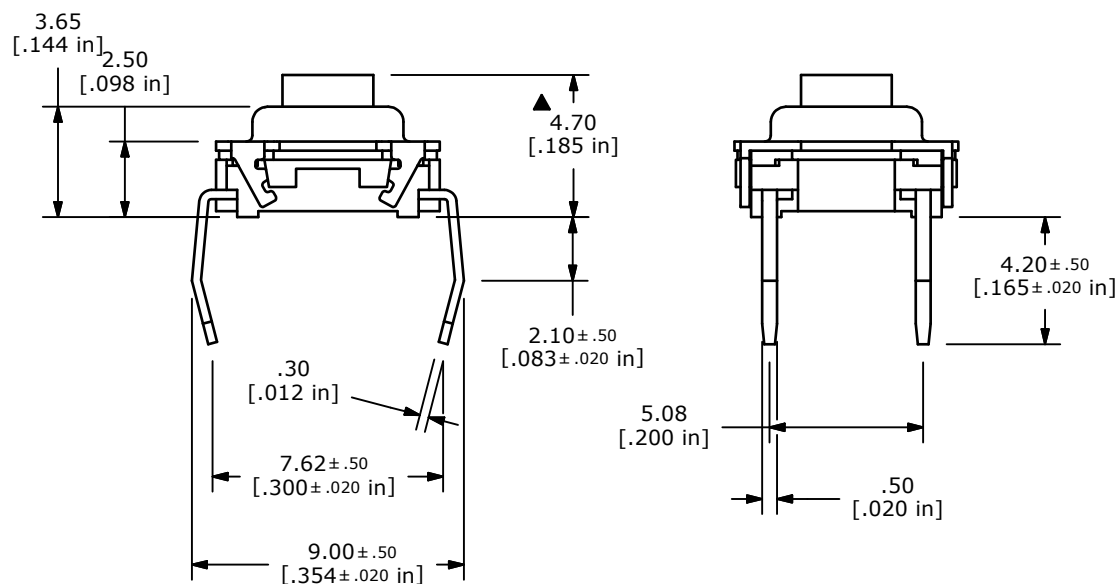

A	21179	New Release	7/23/13	rc
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE TL6100AF160QP				
SCALE	DATE 5/31/2013	DR rc	DWG T350001	REV A