
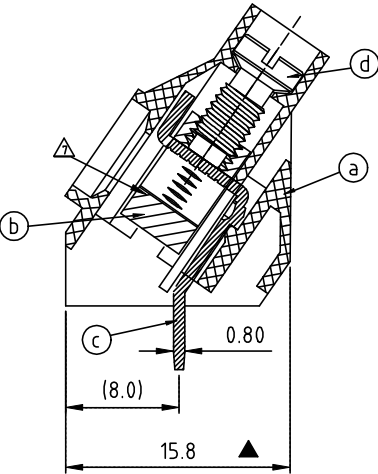
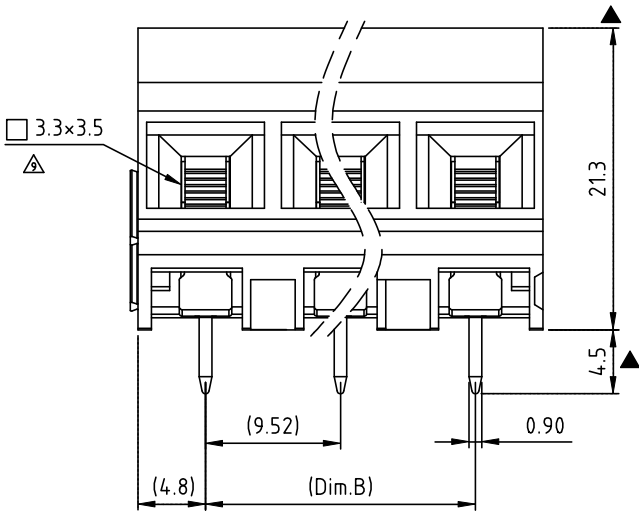
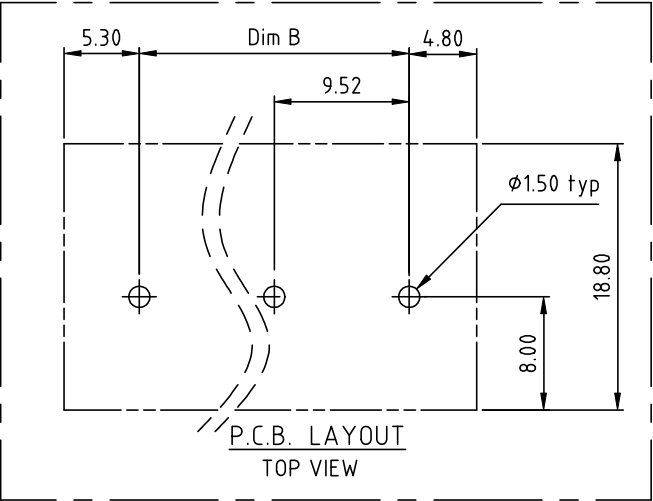


RoHS Compliant

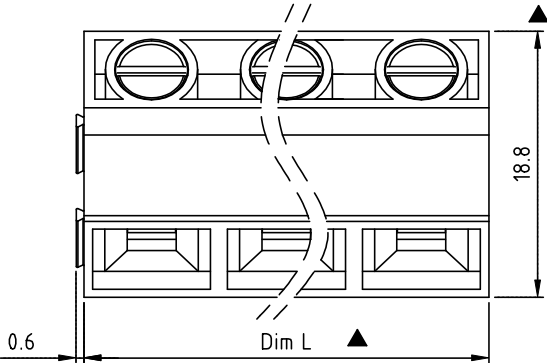

DIMENSION

N = Number of poles

Dim L	Nx9.52
Dim B	(N-1)x9.52
Poles	Dim.L Tol.
2p-6p	±0.20
7p-11p	±0.30
12p-16p	±0.40

No. of poles end
stackable design
02 2 POLES
03 3 POLES
...
16 16 POLES

- 0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy
0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

T7 xx 23 x 1 xxxx G

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
D	△	02/02.07	Soldering temperature changed from 245° to 250°	Tason
	△	02/02.07	Part NO is Changed	Tason
E	△	03/04.08	Screw from M3 to M3.5	Aaron
F	△	04.08.09	Current,wire range , torque are changed	JODY
G	△	9/14'09	Wire guard solder pin is changed from Brass to Copper	Aaron
H	△	02/22'10	Torque is changed from 8.9Lb-In to 6.9Lb-In	Aaron
I	△	08/03'10	Clamp is changed	Aaron
J	△	12/13'10	Add is " TUV "	Chen Bo
K	△	04/14'23	Update the drawing	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- ItemⒶ Terminal housing:Thermoplastic (UL 94V-0)
- ItemⒷ Clamp: Brass, Ni plated
- ItemⒸ Wire guard solder pin: Copper,Tin plated
- ItemⒹ Terminal screw: Steel Zinc plating"-slot type

Electrical	cULus	TUV
● Voltage rating:	300V	750V
● Current rating:	30A	41A
● Wire range:		0.20-6.0mm ²
● Solid wire(AWG):	10-24	
● Stranded wire(AWG):	10-24	
● Torque:	8.9Lb-In	0.85 N.m
● Screw:	M3.5	
● Wire strip length:	6-7mm	
● Withstanding Voltage:	1.6KV	3.0KV
● Operating temperature:	-40°C to +115°C	
● Wave Soldering temperature:	260°C±5°C/5 Sec	
● Safety Approval:	cULus	TUV
● Critical dimension:	△	
● Reference dimension:	(×)	
The dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.		

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	T7 - 9.52mm 45° Series 2P-16P" - " Screw Stackable						
PART NO.	T7xx23x1xxxxG			DWG NO.	8T70201		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Guoxue 2023.04.14	Guoxue 2023.04.14		UNIT: mm	X. ±0.50	
					SCALE: NONE	X.X ±0.30	
					SHEET: 01/01	REV.: K	X° ±1°